

FACE GROOVE-TURN TOOLS

Metric Version 2013





Quality Standard

ISCAR has been certified by the prestigious Standards Institution, as being in full compliance with Quality and Environmental & Occupational Health and Safety Management Standards -
AS9100 Rev C
ISO 9001:2008
ISO 14001:2004
OHSAS 18001

In addition, completed products are inspected before shipping, to ensure delivery of the finest quality goods. Quality control facilities include the metallurgical laboratory, raw metal testing, an online testing procedure and a machining center for tool performance testing and final product inspection.

Only the finest products are packaged for entry into ISCAR's inventory.



THE STANDARDS INSTITUTION OF ISRAEL



THE STANDARDS INSTITUTION OF ISRAEL



THE STANDARDS INSTITUTION OF ISRAEL

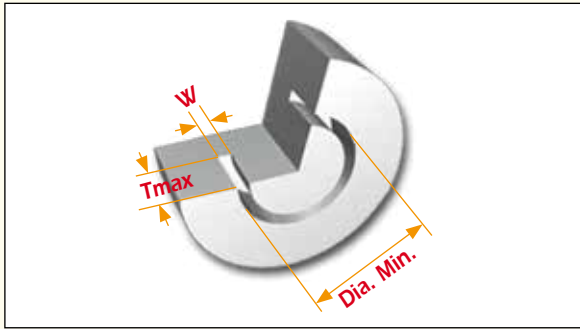


Table of Content	Page
Insert selection guide.....	2-3
Tool selection guide	4-8
PICCOCUT.....	9-12, 14-16
CHAMGROOVE.....	13
MINCUT	17-19
HELIFACE	20-26, 29-31, 34-35
MODULAR-GRIP adapters.....	27-28
HELIFACE boring bars with adapters	36-41
HELIFACE inserts	44-50
Exchangeable adapter holders.....	32-33, 42, 51-57
Blocks for blades	58-61
CUT-GRIP tools	62-67
CUT-GRIP inserts	68-85
TANG-GRIP	86-89
PENATCUT.....	90-95
Special tools.....	97, 114
User guide	98-113
Alphabetical index.....	116



The Ultimate Expert in Selecting the Best Tool









A Variety of Inserts for Face Machining Applications



Face Grooving D min 6-30 mm

		D min	D max	W min	W max	T max	Page
PICCO		6	—	1	3	30	9-12
MIFR		8	34	1.5	3	9	18
GFQR		12	19	1	2.5	3	13
HGPL		12	∞	3	6	∞	50
GRIP		12	∞	3	6	∞	45-46
DGN		21	∞	4	6	∞	48-49

Face Grooving D min 22-80 mm

		D min	D max	W min	W max	T max	Page
HFPR/L		24	∞	3	6	∞	44
PENTA 34F		22	∞	2.39	4	5	90
TNF		30	∞	3	6	∞	88-89
GDMY/N		50	∞	8	8	25	70 73-75
GIF 8		80	∞	8	8	25	71-72
GIFG 8		50	∞	8	8	25	68
GIMM 8CC		80	∞	7	8	∞	75
GDMM 8CC		50	∞	8	8	∞	76

Small Diameter Face Machining Systems



B A

Tool: HGHR/L see page 22
Insert: GRIP... / HGPL...

- W = 3 mm**
- Tmax = 6 mm**
- Min. dia. = 12 mm**

Integral shank toolholder which uses double-ended 3 mm inserts. Used for face grooving and face turning of small parts, for 12 mm minimum groove diameter.




B A

Tool: HGAER/L... (adapter) see page 29
Tool: HFAER/L... (adapter) see page 30
Insert: HFPR/L...

- W = 3-6 mm**
- Tmax = 32 mm**
- Min. dia. = 12 mm**

Exchangeable external adapters. Used with HELIFACE and GRIP inserts, for deep face machining.



B A

Tool: PCHPR/L see page 91
Insert: PENTA 34F...

- W = 2.39-4 mm**
- Tmax = 5 mm**
- Min. dia. = 22 mm**

Pentagonal insert for face grooving and recessing up to 5 mm depth of cut at a minimum 22 mm diameter.




C B

Tool: PICCO R010 see pages 9-10

- W = 1-3 mm**
- Tmax = 6 mm**
- Min. dia. = 6 mm**

Small solid carbide bars, for machining shallow grooves from 6 mm minimum diameter.

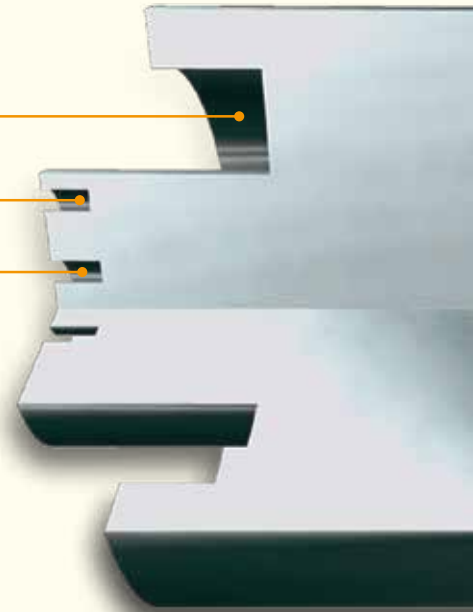




Tool: PICCO R015 see page 5

W = 2.5-3 mm

Tmax = 30 mm

Min. dia. = 15 mm

Small solid carbide bars for machining deep face grooves of up to 30 and 15 mm minimum diameter.



Tool: MIFHR ... see page 17

Insert: MIFR ...

W = 2-3 mm

Tmax = 9 mm

Min. dia. = 10 mm

MINCUT - A new family of internal face grooving and face turning tools for machining small diameters ranging from 10-34 mm. Strong and stable tangential pocket with internal coolant.



Tool: MIFHR ... see page 17

Insert: MIFR ...

W = 1.5-3 mm

Tmax = 5.5 mm

Min. dia. = 8 mm

MINCUT - A new family of internal face grooving and face turning tools for machining small diameters ranging from 8-17 mm. Strong and stable tangential pocket with internal coolant.



Tool: MGCH 09C see page 13


Insert: GFQR...

W = 1-2.5 mm


Tmax = 3 mm

Min. dia. = 12 mm


A screw-clamped insert on an internal coolant solid carbide bar. Used for machining shallow grooves of 12 mm minimum diameter.

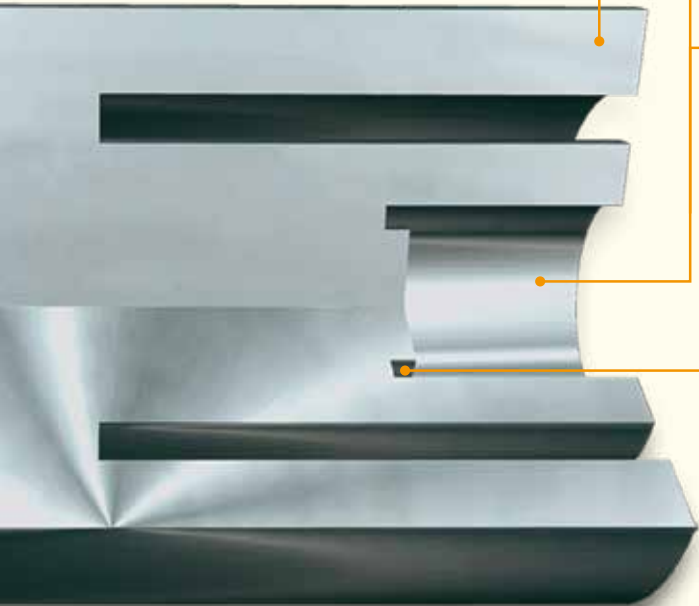


Main Applications

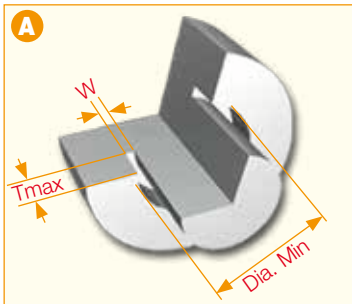

Grooving Next to a Shaft

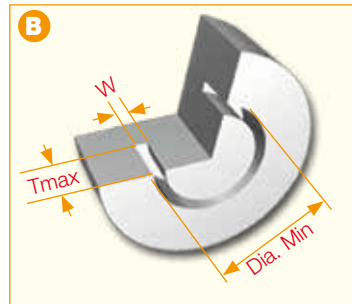

External Grooving

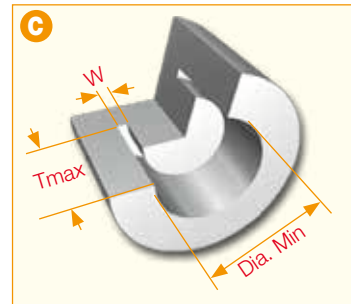

Internal Grooving

Medium Diameter Face Machining Systems



B A


Tool: HFHR/L... see pages 23-26
Insert: HFPR/L...

W = 3-6 mm

Tmax = 32 mm

Min. dia. = 25 mm

Integral shank toolholders which use HELIFACE and GRIP inserts.
For deep face grooving and side face turning.



B A


Tool: HFPAD... (adapter) see pages 27-28
Insert: HFPR/L...

W = 3-6 mm

Tmax = 22 mm

Min. dia. = 25 mm

Slanted, screw-clamped adapter, used with HELIFACE and GRIP inserts.
A part of the MODULAR-GRIP system. Very rigid, for tough face operations.



B

Tool: TNFFH see page 86
Insert: TNF 3-6C...

W = 3-6 mm

Tmax = 32 mm

Min. dia. = 30 mm

Adapter and blade toolholders which use TNF 3-6C inserts.
For deep face grooving.



B


Tool: HFFR/L... see page 29
Insert: HFPR/L...

W = 4-6 mm

Tmax = 38 mm

Min. dia. = 48 mm

Economical, double-ended blades which use HELIFACE and GRIP inserts.
Recommended for deep face grooving and face turning to a maximum depth of 38 mm.



A B


Tool: TNFFA see page 87
Insert: TNF 3-6C...


W = 3-6 mm

Tmax = 32 mm

Min. dia. = 30 mm

Reinforced blades which use TNF 3-6C inserts.
Recommended for face grooving only, can machine along shaft. Excellent chip evacuation.

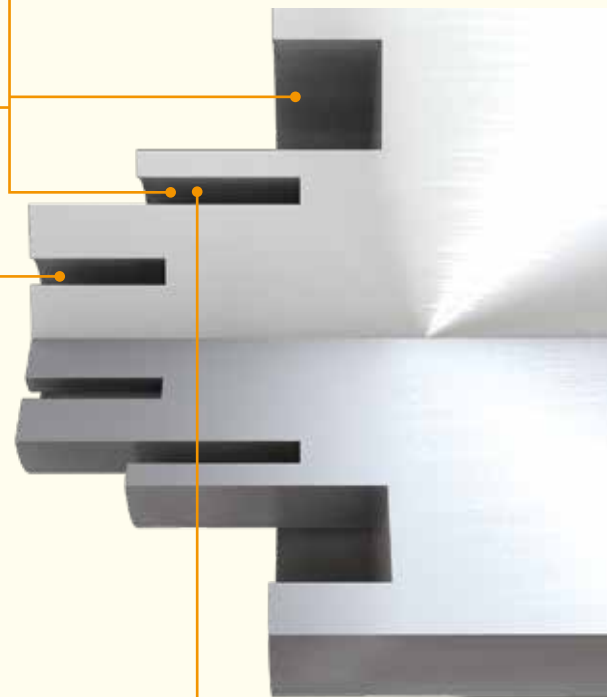



Tool: PCHPRS/LS see page 94
Insert: PENTA 34F-RS/LS...

W = 2.39-4 mm
Tmax = 5 mm
Min. dia. = 22 mm


Pentagonal insert for face grooving and recessing next to shoulder to 5 mm depth of cut at a minimum 22 mm diameter.



Tool: HFHR/L...-M see page 34
Insert: HFPR/L...

W = 3-6 mm
Tmax = 5 mm
Min. dia. = 20 mm

Integral toolholders, used with HELIFACE and GRIP inserts. For machining up to 5 mm depth. 3-6 mm wide inserts can be mounted in the same pocket.



Tool: HFAIR/L...& HGAIR/L (adapter) see pages 38, 40
Insert: HFPR/L...

W = 3-6 mm
Tmax = 12 mm
Min. dia. = 32 mm


Exchangeable, internal coolant, internal adapters. Used with HELIFACE and GRIP inserts. Recommended for deep internal face machining.




Tool: HFIR/L...-MC see page 41
Insert: HFPR/L...

W = 3-6 mm
Tmax = 5 mm
Min. dia. = 20 mm


Boring bars for shallow face machining of up to 5 mm depth. Used with HELIFACE and GRIP inserts. Internal coolant. 3-6 mm width inserts can be mounted on the same pocket.

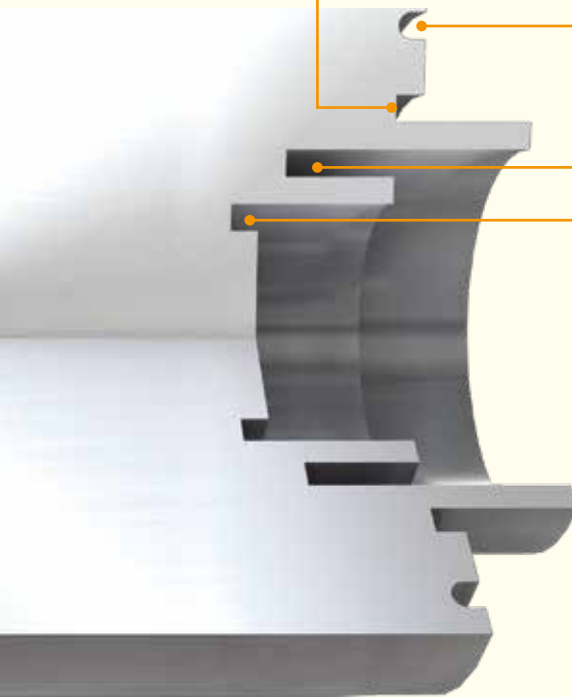


Main Applications



Grooving Next to a Shaft

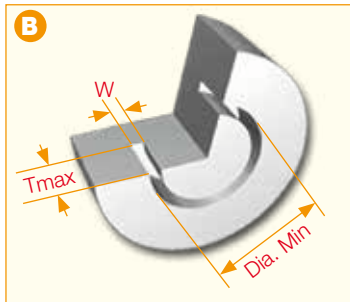


External Grooving

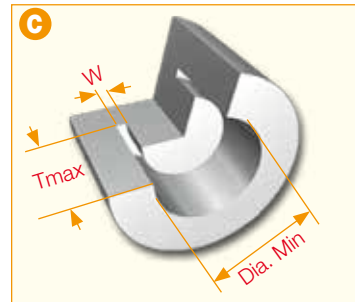

Internal Grooving

Large Diameter Face Machining Systems

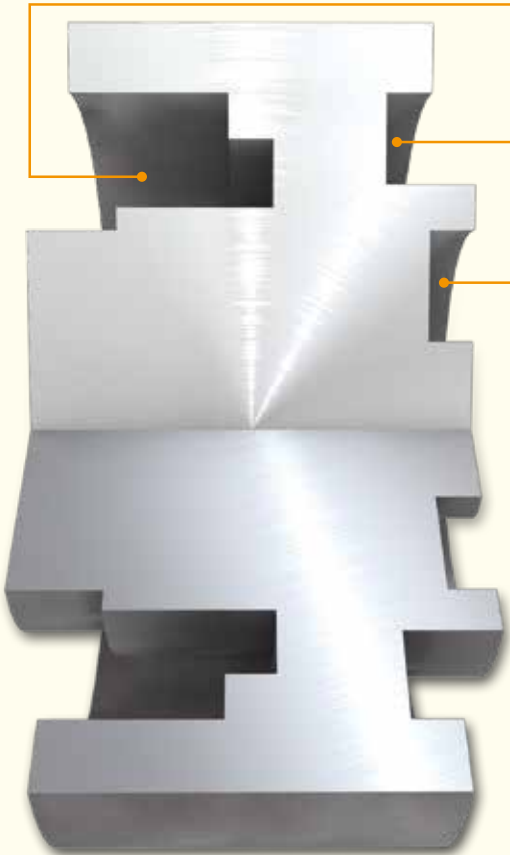

B A

Tool: CGFG 51-..R/L-P8
see page 67


Insert: GIMY 8...

W = 8 mm

Tmax = 120 mm

Min. dia. = 180 mm

Blades used with 8 mm single-ended CUT-GRIP inserts. Can machine up to 120 mm depth next to a shaft. Used for large diameters.



B A

Tool: GHFG ..R/L-8 see page 62


Insert: GDMY 8...

W = 8 mm

Tmax = 25 mm

Min. dia. = 50 mm

Integral toolholders, used with 8 mm CUT-GRIP inserts. For heavy machining of medium and large parts. Can machine next to a shaft up to 25 mm depth.



B A

Tool: GAFG ..R/L-8 (adapter)
see page 67

Insert: GDMM 8CC


W = 8 mm

Tmax = 25 mm


Min. dia. = 80 mm

Exchangeable adapters, used with 8 mm CUT-GRIP inserts. Can machine up to 25 mm depth next to a shaft. For heavy machining of medium and large parts.


Main Applications

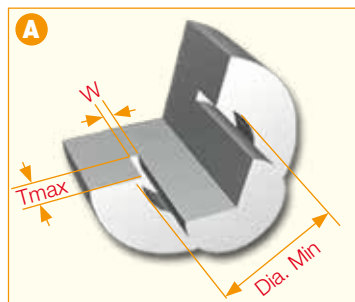

A
Grooving Next to a Shaft

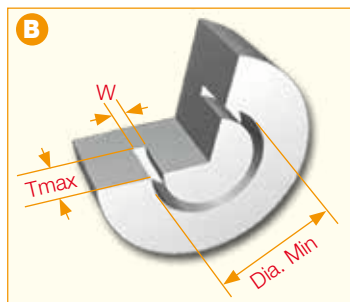




B
External Grooving

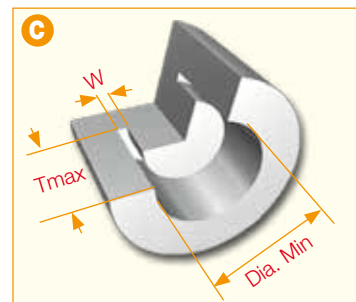

C
Internal Grooving

PICCO-010/610 (face grooving)

Inserts for Face Grooving



Right-hand shown

Designation	Dimensions							IC228	Recommended Machining Data
	D1 min	W	T _{max-a}	d	a	l ₂	l ₁		f face-groove (mm/rev)
PICCO R 010.1006-10	6.0	1.00	1.50	6.00	5.20	11.0	26.00	●	0.01-0.04
PICCO R 010.1506-10	6.0	1.50	2.00	6.00	5.20	11.0	26.00	●	0.01-0.04
PICCO R 010.1008-10	8.0	1.00	1.50	7.00	5.90	11.0	26.00	●	0.01-0.04
PICCO R 010.1008-20	8.0	1.00	1.50	7.00	5.90	21.0	35.00	●	0.01-0.04
PICCO R 010.1008-30	8.0	1.00	1.50	7.00	5.90	30.0	45.00	●	0.01-0.04
PICCO R 610.1008-10	8.0	1.00	1.50	6.00	5.20	11.0	26.00	●	0.01-0.04
PICCO R 610.1008-20	8.0	1.00	1.50	6.00	5.20	20.0	35.00	●	0.01-0.04
PICCO R/L 010.1508-20	8.0	1.50	2.50	7.00	5.90	21.0	35.00	●	0.01-0.04
PICCO R/L 010.1508-30	8.0	1.50	2.50	7.00	5.90	30.0	45.00	●	0.01-0.04
PICCO R 010.1508-10	8.0	1.50	2.50	7.00	5.90	11.0	26.00	●	0.01-0.04
PICCO R 610.1508-10	8.0	1.50	2.50	6.00	5.20	11.0	26.00	●	0.01-0.04
PICCO R 610.1508-20	8.0	1.50	2.50	6.00	5.20	20.0	35.00	●	0.01-0.04
PICCO R/L 010.2008-30	8.0	2.00	3.00	7.00	5.90	30.0	45.00	●	0.02-0.05
PICCO R 010.2008-10	8.0	2.00	3.00	7.00	5.90	11.0	26.00	●	0.02-0.05
PICCO R 010.2008-20	8.0	2.00	3.00	7.00	5.90	21.0	35.00	●	0.02-0.05
PICCO R 610.2008-10	8.0	2.00	3.00	6.00	5.20	11.0	26.00	●	0.02-0.05
PICCO R 610.2008-20	8.0	2.00	3.00	6.00	5.20	20.0	35.00	●	0.02-0.05
PICCO R 010.2508-10	8.0	2.50	3.50	7.00	5.90	11.0	26.00	●	0.02-0.05
PICCO R 010.2508-20	8.0	2.50	3.50	7.00	5.90	21.0	35.00	●	0.02-0.05
PICCO R 010.2508-30	8.0	2.50	3.50	7.00	5.90	30.0	45.00	●	0.02-0.05
PICCO R 610.2508-10	8.0	2.50	3.50	6.00	5.20	11.0	26.00	●	0.02-0.05
PICCO R 610.2508-20	8.0	2.50	3.50	6.00	5.20	20.0	35.00	●	0.02-0.05
PICCO R 010.3008-10	8.0	3.00	3.50	7.00	5.90	11.0	26.00	●	0.02-0.06
PICCO R 010.3008-20	8.0	3.00	3.50	7.00	5.90	21.0	35.00	●	0.02-0.06
PICCO R 010.3008-30	8.0	3.00	3.50	7.00	5.90	30.0	45.00	●	0.02-0.06
PICCO R 610.3008-10	8.0	3.00	3.50	6.00	5.20	11.0	26.00	●	0.02-0.06
PICCO R 610.3008-20	8.0	3.00	3.50	6.00	5.20	20.0	35.00	●	0.02-0.06

• Only right-hand inserts are available as standard • All inserts are with sharp corners • For detailed cutting data, see pages 108-109.



For holders, see pages: PICCO/MG PCO (holder) (14-16).



PICCO CUT

PICCO-010 (round face groove)

Inserts for Round Profile Face Grooving

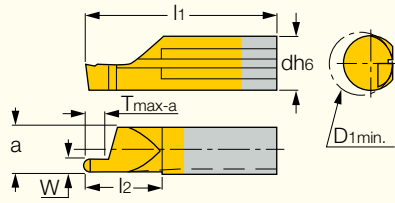

Right-hand shown



Designation	Dimensions								IC1008	Recommended Machining Data
	D1 min	W	R	Tmax-a	d	a	l2	l1		f face-groove (mm/rev)
PICCO R 010.1005-10	8.0	1.00	0.50	2.00	7.00	5.90	11.0	26.00	●	0.01-0.04
PICCO R 010.1005-20	8.0	1.00	0.50	2.00	7.00	5.90	20.0	35.00	●	0.01-0.04
PICCO R 010.1608-10	8.0	1.60	0.80	3.00	7.00	5.90	11.0	26.00	●	0.01-0.05
PICCO R 010.1608-20	8.0	1.60	0.80	3.00	7.00	5.90	20.0	35.00	●	0.01-0.05
PICCO R 010.2010-10	8.0	2.00	1.00	4.00	7.00	5.90	11.0	26.00	●	0.02-0.05
PICCO R 010.2010-20	8.0	2.00	1.00	4.00	7.00	5.90	20.0	35.00	●	0.02-0.05
PICCO R 010.2512-10	8.0	2.50	1.25	5.00	7.00	5.90	11.0	26.00	●	0.02-0.05
PICCO R 010.2512-20	8.0	2.50	1.25	5.00	7.00	5.90	20.0	35.00	●	0.02-0.05
PICCO R 010.3015-10	8.0	3.00	1.50	6.00	7.00	5.90	11.0	26.00	●	0.02-0.05
PICCO R 010.3015-20	8.0	3.00	1.50	6.00	7.00	5.90	20.0	35.00	●	0.02-0.05

• Only right-hand inserts are available as standard. Left-hand inserts on request. • For detailed cutting data, see pages 108-109.

For holders, see pages: PICCO/MG PCO (holder) (14-16).

PICCO-620 (groov. along shaft)

Inserts for Grooving Along a Shaft Dmin 6 mm

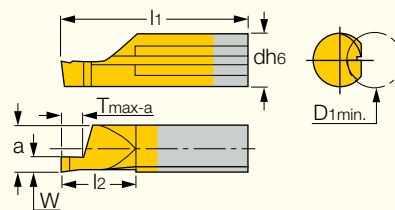

Right-hand shown

Designation	Dimensions								IC1008	Recommended Machining Data
	D1 min	W	Tmax-a	d	a	l2	l1	f face-groove (mm/rev)		
PICCO R 620.1006-20	6.0	1.00	2.00	6.00	5.20	20.0	35.00	●	0.01-0.04	
PICCO R 620.1506-20	6.0	1.50	3.00	6.00	5.20	20.0	35.00	●	0.01-0.05	
PICCO R 620.2006-20	6.0	2.00	4.00	6.00	5.20	20.0	35.00	●	0.02-0.06	
PICCO R 620.2506-20	6.0	2.50	5.00	6.00	5.20	20.0	35.00	●	0.02-0.06	
PICCO R 620.3006-20	6.0	3.00	6.00	6.00	5.20	20.0	35.00	●	0.02-0.06	

• Only right-hand inserts are available as standard. Left-hand inserts on request. • All carbide inserts are with sharp corners

• For detailed cutting data, see pages 108-109.



For holders, see pages: PICCO/MG PCO (holder) (14-16).



PICCO CUT

PICCO-016/020 (face grooving)

Inserts with Coolant Holes for Deep Face Grooving

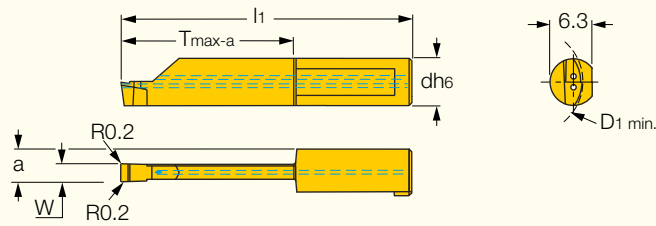

Right-hand shown

Designation	Dimensions						IC1008	Recommended Machining Data
	D1 min	W	T _{max-a}	d	a	l ₁		f face-groove (mm/rev)
PICCO R 016.0300-10	16.0	3.00	10.00	8.00	5.50	30.00	●	0.01-0.05
PICCO R 016.0300-20	16.0	3.00	20.00	8.00	5.50	40.00	●	0.01-0.05
PICCO R 016.0400-10	16.0	4.00	10.00	8.00	6.00	30.00	●	0.01-0.05
PICCO R 016.0400-20	16.0	4.00	20.00	8.00	6.00	40.00	●	0.01-0.05
PICCO R 020.0300-25	20.0	3.00	25.00	8.00	5.50	45.00	●	0.01-0.05
PICCO R 020.0300-30	20.0	3.00	30.00	8.00	5.50	50.00	●	0.01-0.04
PICCO R 020.0300-35	20.0	3.00	35.00	8.00	5.50	55.00	●	0.01-0.04
PICCO R 020.0300-40	20.0	3.00	40.00	8.00	5.50	60.00	●	0.01-0.04
PICCO R 020.0400-25	20.0	4.00	25.00	8.00	6.00	45.00	●	0.01-0.06
PICCO R 020.0400-30	20.0	4.00	30.00	8.00	6.00	50.00	●	0.01-0.06
PICCO R 020.0400-35	20.0	4.00	35.00	8.00	6.00	55.00	●	0.01-0.05
PICCO R 020.0400-40	20.0	4.00	40.00	8.00	6.00	60.00	●	0.01-0.05
PICCO R 020.0500-20	20.0	5.00	20.00	8.00	6.50	40.00	●	0.02-0.06
PICCO R 020.0500-25	20.0	5.00	25.00	8.00	6.50	45.00	●	0.02-0.06
PICCO R 020.0500-30	20.0	5.00	30.00	8.00	6.50	50.00	●	0.02-0.06
PICCO R 020.0500-35	20.0	5.00	35.00	8.00	6.50	55.00	●	0.02-0.05
PICCO R 020.0500-40	20.0	5.00	40.00	8.00	6.50	60.00	●	0.02-0.05

• All inserts have two coolant holes which may be used with coolant pressure up to 100 bars. • For detailed cutting data, see pages 108-109.



For holders, see pages: PICCO/MG PCO (holder) (14-16).



PICCO CUT

PICCO-015 (face grooving)

Inserts for Deep Face Grooving

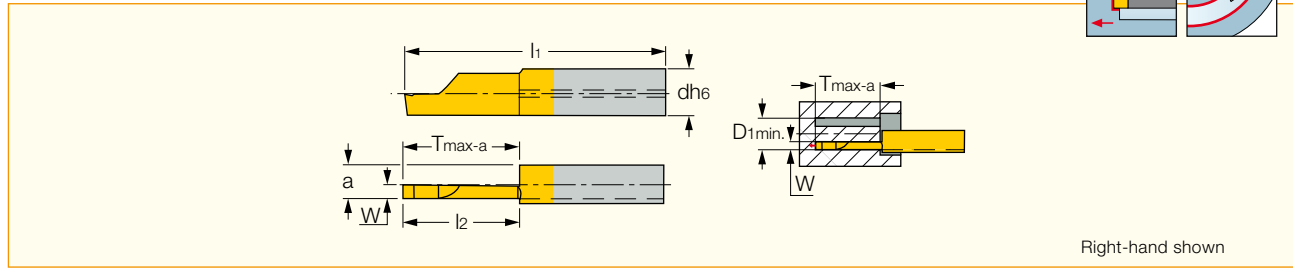


Right-hand shown

Designation	Dimensions							IC228	Recommended Machining Data
	D1 min	W	Tmax-a	d	a	l2	l1		f face-groove (mm/rev)
PICCO R 015.2515-20	15.0	2.50	20.00	7.00	5.90	20.0	35.00	●	0.01-0.04
PICCO R/L 015.3015-20	15.0	3.00	20.00	7.00	5.90	20.0	35.00	●	0.02-0.05
PICCO R 015.3015-30	15.0	3.00	30.00	7.00	5.90	30.0	45.00	●	0.01-0.04

- Only right-hand inserts are available as standard. Left-hand inserts on request.
- All inserts are with sharp corners.
- For detailed cutting data, see pages 108-109.

For holders, see pages: PICCO/MG PCO (holder) (14-16).





PICCO Mini-Bar Tool Kit Face Grooving KIT Picco SET-4R

Designation	Mini Bore Dia.	L1	Tmax	W	Pcs.	Designation
PICCO 16.D6				1x		Holder
PICCO R/L 010.1008-10	8.0	11	1.5	1.0	1x	Mini Carbide Bar
PICCO R/L 010.1508-10	8.0	11	2.5	1.5	1x	Mini Carbide Bar
PICCO R/L 010.2008-10	8.0	11	3.0	2.0	1x	Mini Carbide Bar
PICCO R/L 010.2508-20	8.0	21	3.5	2.5	1x	Mini Carbide Bar
PICCO R/L 010.3008-20	8.0	21	3.5	3.0	1x	Mini Carbide Bar

Available grade: IC228.

KIT PICCO Face

Contains One Toolholder and a Set of Solid Carbide Miniature Face Turning and Grooving Boring Bars

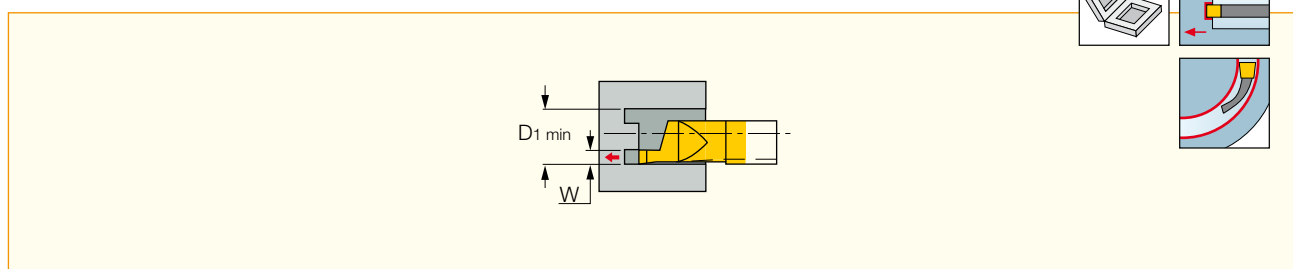



Designation	D1 min	W min	W max
KIT PICCO SET-4R	8.0	1.00	3.00

CHAMGROOVE

MGCH-C (face)

Face Machining Inserts for D_{min} 12 - D_{max} 19 mm Penetration Range, Using GFQR Inserts

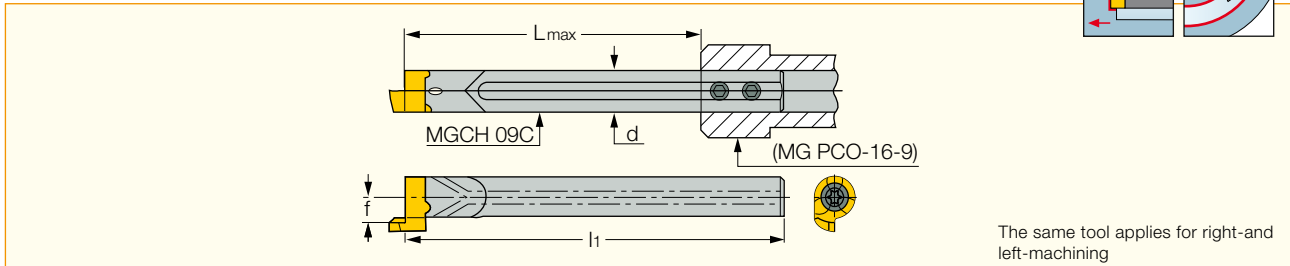


Designation	D_{min}	d	l_1	L_{max}	f
MGCH 09C	12.00	9.00	83.50	65.0	5.5

For inserts, see pages: GFQR (13).

For holders, see pages: PICCO/MG PCO (holder) (14).

MG PCO

Holder Bar for Adjustable Shank

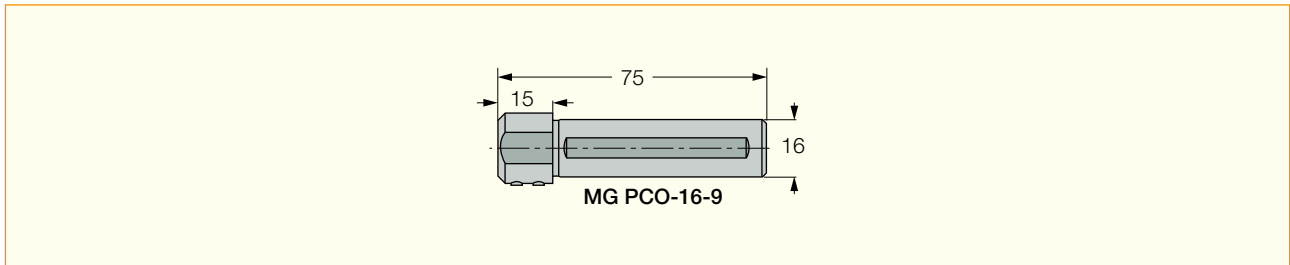



Spare Parts



Designation	Screw	Key
MGCH-C (face)	SR 76-2145	T-15/5

GFQR

Face Grooving Inserts

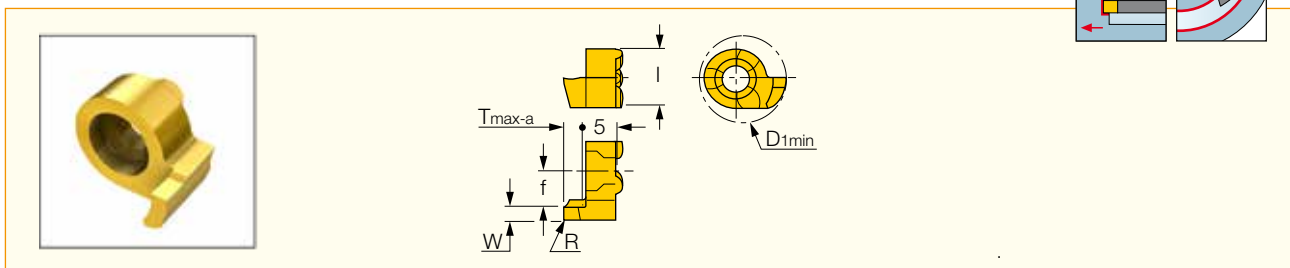


Designation	Dimensions					IC528	Recommended Machining Data f face-groove (mm/rev)
	$W_{\pm 0.02}$	R	T_{max-a}	$D_{1 min}^{(1)}$	$D_{1 max}^{(2)}$		
GFQR 12-1.00-0.05	1.00	0.05	1.50	12.0	16.0	●	0.01-0.04
GFQR 12-1.50-0.20	1.50	0.20	2.50	12.0	17.0	●	0.01-0.04
GFQR 12-2.00-0.20	2.00	0.20	3.00	12.4	18.0	●	0.02-0.05
GFQR 12-2.50-0.20	2.50	0.20	3.00	13.0	19.0	●	0.02-0.05

• For detailed cutting data, see pages 108-109.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

PICCO/MG PCO (holder)

Holders for PICCO Inserts and Small Diameter Boring Bars

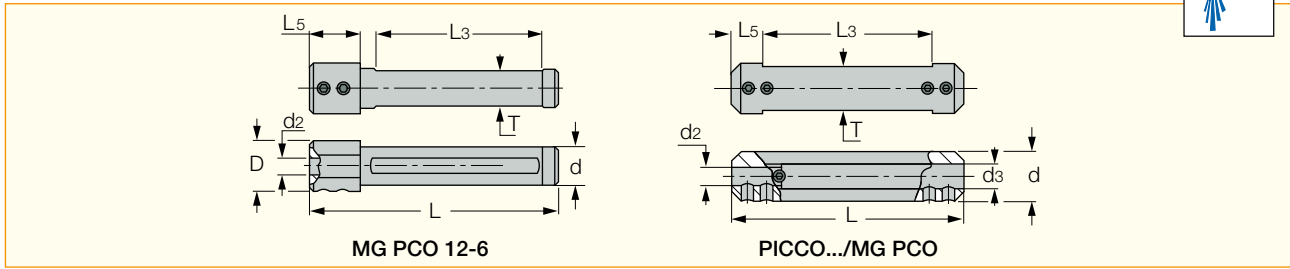

Designation	d	d2	d3	L	L5	L3	T	D
PICCO 12-4-5	12.00	4.00	5.00	75.00	10.00	55.00	10.3	18.00
PICCO 16-4-5	16.00	4.00	5.00	75.00	10.00	55.00	14.0	18.00
PICCO 20-4-5	20.00	4.00	5.00	90.00	10.00	70.00	18.0	18.00
PICCO 22-4-5 ⁽¹⁾	22.00	4.00	5.00	90.00	10.00	70.00	20.0	18.00
PICCO 16-6-7	16.00	6.00	7.00	75.00	10.00	55.00	14.0	18.00
PICCO 20-6-7	20.00	6.00	7.00	90.00	10.00	70.00	18.0	18.00
PICCO 22-6-7 ⁽¹⁾	22.00	6.00	7.00	90.00	10.00	70.00	20.0	18.00
MG PCO-12-6	12.00	6.00	-	75.00	15.00	50.80	11.0	18.00
MG PCO-16-6-8	16.00	6.00	8.00	75.00	10.00	55.00	14.0	18.00
MG PCO-20-6-8	20.00	6.00	8.00	90.00	10.00	70.00	18.0	18.00
MG PCO-22-6-8 ⁽¹⁾	22.00	6.00	8.00	90.00	10.00	70.00	20.0	18.00
MG PCO-25-6-8	25.00	6.00	8.00	90.00	10.00	70.00	23.0	18.00
MG PCO-16-9	16.00	9.00	-	75.00	15.00	53.00	18.0	18.00

• Holders are suitable for right- and left-hand inserts, and boring bars.


⁽¹⁾ Tools for Swiss-type CNC

Spare Parts



Designation	Screw	Key	Seal
PICCO 12-4-5	SR M5X4-PF	HW 2.5	
PICCO 16-4-5	SR M5X6-PF	HW 2.5	
PICCO 20-4-5	SR M5X6-PF	HW 2.5	
PICCO 22-4-5	SR M5X6-PF	HW 2.5	
PICCO 16-6-7	SR M5X6-PF	HW 2.5	
PICCO 20-6-7	SR M5X6-PF	HW 2.5	
PICCO 22-6-7	SR M5X6-PF	HW 2.5	
MG PCO-12-6	SR M5X6-PF	HW 2.5	
MG PCO-16-6-8	SR M5X6-PF	HW 2.5	
MG PCO-20-6-8	SR M5X6-PF	HW 2.5	
MG PCO-22-6-8	SR M5X6-PF	HW 2.5	
MG PCO-25-6-8	SR M5X6-PF	HW 2.5	
MG PCO-16-9	SR M5X6-PF	HW 2.5	PL 16



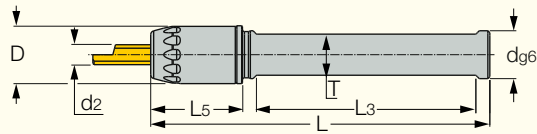

Designation	Dimensions							Wrench	Cap Ace
	d	d2	D	L	L5	L3	T		
PICCO ACE 12-4	12.00	4.00	14.50	85.00	23.00	55.00	10.3	WRENCH ACE 4-5	CAP ACE 4
PICCO ACE 12-5	12.00	5.00	14.50	85.00	23.00	55.00	10.3	WRENCH ACE 4-5	CAP ACE 5
PICCO ACE 16-4	16.00	4.00	14.50	85.00	23.00	58.50	14.0	WRENCH ACE 4-5	CAP ACE 4
PICCO ACE 16-5	16.00	5.00	14.50	85.00	23.00	58.50	14.0	WRENCH ACE 4-5	CAP ACE 5
PICCO ACE 16-6	16.00	6.00	14.50	85.00	23.00	58.50	14.0	WRENCH ACE 6-7	CAP ACE 6
PICCO ACE 16-7	16.00	7.00	14.50	85.00	23.00	58.50	14.0	WRENCH ACE 6-7	CAP ACE 7
PICCO ACE 20-4	20.00	4.00	14.50	100.00	23.00	73.50	18.0	WRENCH ACE 4-5	CAP ACE 4
PICCO ACE 20-5	20.00	5.00	14.50	100.00	23.00	73.50	18.0	WRENCH ACE 4-5	CAP ACE 5
PICCO ACE 20-6	20.00	6.00	14.50	100.00	23.00	73.50	18.0	WRENCH ACE 6-7	CAP ACE 6
PICCO ACE 20-7	20.00	7.00	14.50	100.00	23.00	73.50	18.0	WRENCH ACE 6-7	CAP ACE 7
PICCO ACE 22-4	22.00	4.00	14.50	100.00	23.00	73.50	20.0	WRENCH ACE 4-5	CAP ACE 4
PICCO ACE 22-5	22.00	5.00	14.50	100.00	23.00	73.50	20.0	WRENCH ACE 4-5	CAP ACE 5
PICCO ACE 22-6	22.00	6.00	14.50	100.00	23.00	73.50	20.0	WRENCH ACE 6-7	CAP ACE 6
PICCO ACE 22-7	22.00	7.00	14.50	100.00	23.00	73.50	20.0	WRENCH ACE 6-7	CAP ACE 7

• Holders are suitable for left- and right-hand PICCO inserts


Designation	d	d2	D	L	L5	L3	T	Wrench
PICCO ACE 12-4	12.00	4	14.5	85	23	55	10.3	Wrench ACE 4-5
PICCO ACE 12-5	12.00	5	14.5	85	23	55	10.3	Wrench ACE 4-5
PICCO ACE 16-4	16.00	4	14.5	85	23	58.5	14	Wrench ACE 4-5
PICCO ACE 16-5	16.00	5	14.5	85	23	58.5	14	Wrench ACE 4-5
PICCO ACE 16-6	16.00	6	20.0	85	23	58.5	14	Wrench ACE 6-7
PICCO ACE 16-7	16.00	7	20.0	85	23	58.5	14	Wrench ACE 6-7
PICCO ACE 20-4	20.00	4	14.5	100	23	73.5	18	Wrench ACE 4-5
PICCO ACE 20-5	20.00	5	14.5	100	23	73.5	18	Wrench ACE 4-5
PICCO ACE 20-6	20.00	6	20.0	100	23	73.5	18	Wrench ACE 6-7
PICCO ACE 20-7	20.00	7	20.0	100	23	73.5	18	Wrench ACE 6-7
PICCO ACE 22-4	22.00	4	14.5	100	23	73.5	20	Wrench ACE 4-5
PICCO ACE 22-5	22.00	5	14.5	100	23	73.5	20	Wrench ACE 4-5
PICCO ACE 22-6	22.00	6	20.0	100	23	73.5	20	Wrench ACE 6-7
PICCO ACE 22-7	22.00	7	20.0	100	23	73.5	20	Wrench ACE 6-7

NEW



GHPCOR/L


Perpendicular Square-Shank Tools for Use on the Cross Slide Units of Swiss-Type and Automatic Machines

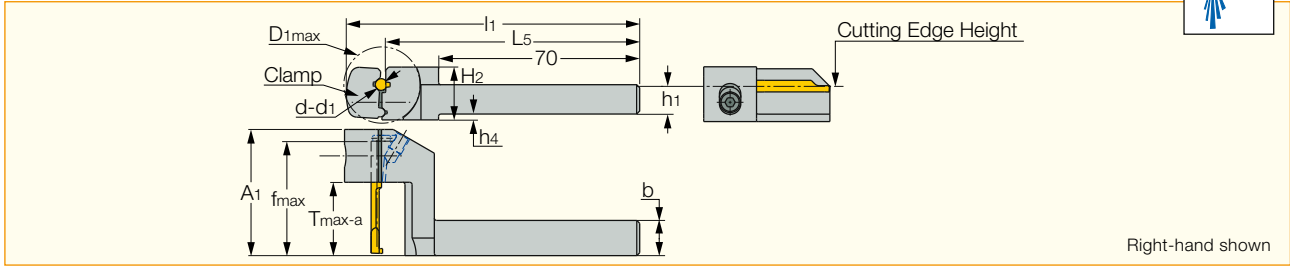



Designation	h	b	l ₁	L ₅	h ₄	H ₂	A ₁	D _{1 max}	T _{max-a}	f _{max}	d	d ₁
GHPCOR/L 08-16-4-5	8.0	8.0	102.00	88.00	4.0	15.0	34.00	26.0	16.00	30.0	4.00	5.00
GHPCOL 08-25-4-5	8.0	8.0	102.00	88.00	4.0	15.0	34.00	26.0	25.00	30.0	4.00	5.00
GHPCOR 08-28-4-5	8.0	8.0	102.00	88.00	4.0	15.0	34.00	26.0	28.00	30.0	4.00	5.00
GHPCOR/L 10-16-4-5	10.0	10.0	102.00	88.00	2.0	18.0	34.00	26.0	16.00	30.0	4.00	5.00
GHPCOR/L 10-25-4-5	10.0	10.0	102.00	88.00	2.0	18.0	34.00	26.0	25.00	30.0	4.00	5.00
GHPCOR/L 12-16-4-6	12.0	12.0	102.00	88.00	-	18.0	34.00	26.0	16.00	30.0	4.00	6.00
GHPCOR/L 12-25-4-6	12.0	12.0	102.00	88.00	-	18.0	43.00	26.0	25.00	39.0	4.00	6.00
GHPCOR/L 16-16-4-6	16.0	16.0	112.00	98.00	-	22.0	35.00	36.0	16.00	31.0	4.00	6.00
GHPCOR/L 16-25-4-6	16.0	16.0	112.00	98.00	-	22.0	44.00	36.0	25.00	40.0	4.00	6.00
GHPCOR/L 16-30-7-8	16.0	16.0	112.00	98.00	-	22.0	49.00	36.0	30.00	45.0	7.00	8.00

• PICCO CUT insert should not exceed A₁ length. • Left-hand holders are available upon request. • Coolant tube adapter: KQ2L06-M5 (for 6 mm coolant tube)

Indexing from the top

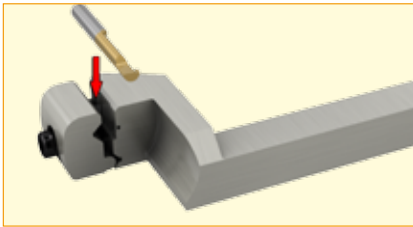

Indexing from the front

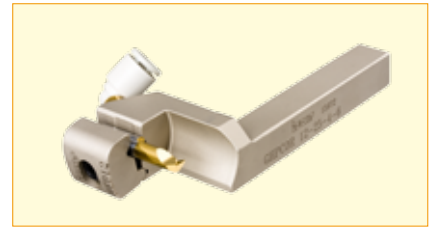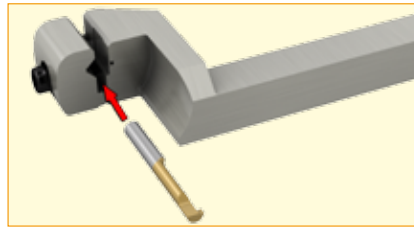


Spare Parts



Designation	Side Clamp	Screw	Key	Pipe Fitting
GHPCOR/L 08-16-4-5	HED 08	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOL 08-25-4-5	HED 08	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR 08-28-4-5	HED 08	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR/L 10-16-4-5	HED 10	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR/L 10-25-4-5	HED 10	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR/L 12-16-4-6	HED 12	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR/L 12-25-4-6	HED 12	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR/L 16-16-4-6	HED 16-4-6	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR/L 16-25-4-6	HED 16-4-6	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOL 16-30-7-8	HED 16-7-8	SR M4X14DIN912 12.9	HW 3.0	KQ2L06-M5
GHPCOR 16-30-7-8	HED 16-7-8	SR M4X14DIN912 12.9	HW 3.0	



Bars for Face and Internal Grooving,
Undercutting and Threading Inserts

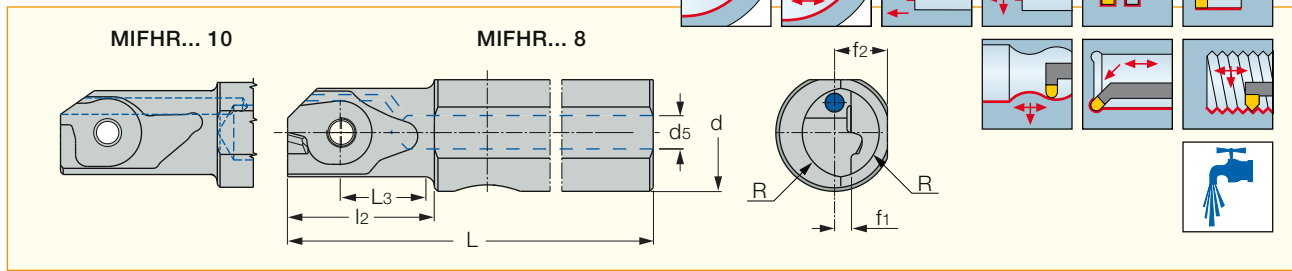

Designation	d	d ₅	f ₁	f ₂	L	L ₃	l ₂	R	Insert
MIFHR 8SC-8-SRK ⁽¹⁾	8.00	1.2	1.4	3.70	75.00	7.40	11.7	3.80	MIFR 8
MIFHR 10C-8	10.00	4.0	1.4	4.50	102.50	7.40	12.5	3.80	MIFR 8
MIFHR 12C-8	12.00	5.0	1.4	5.50	102.50	7.40	12.5	3.80	MIFR 8
MIFHR 12C-10 ⁽²⁾	12.00	6.0	2.4	5.50	90.00	11.20	17.2	4.60	MIFR 10
MIFHR 16C-10 ⁽²⁾	16.00	6.0	2.4	7.50	90.00	11.20	17.2	4.60	MIFR 10

⁽¹⁾ Solid carbide shank ⁽²⁾ Only face grooving inserts are available for this tool


For inserts, see pages: MIFR (18) • MIUR 8 (18).

For holders, see pages: PICCO/MG PCO (holder) (14).

Spare Parts




Designation	Screw	Key
MIFHR 8SC-8-SRK	SR 14-297	T-8/5
MIFHR 10C-8	SR 14-297	T-8/5
MIFHR 12C-8	SR 14-297	T-8/5
MIFHR 12C-10	SR 34-506	T-9/5
MIFHR 16C-10	SR 34-506	T-9/5

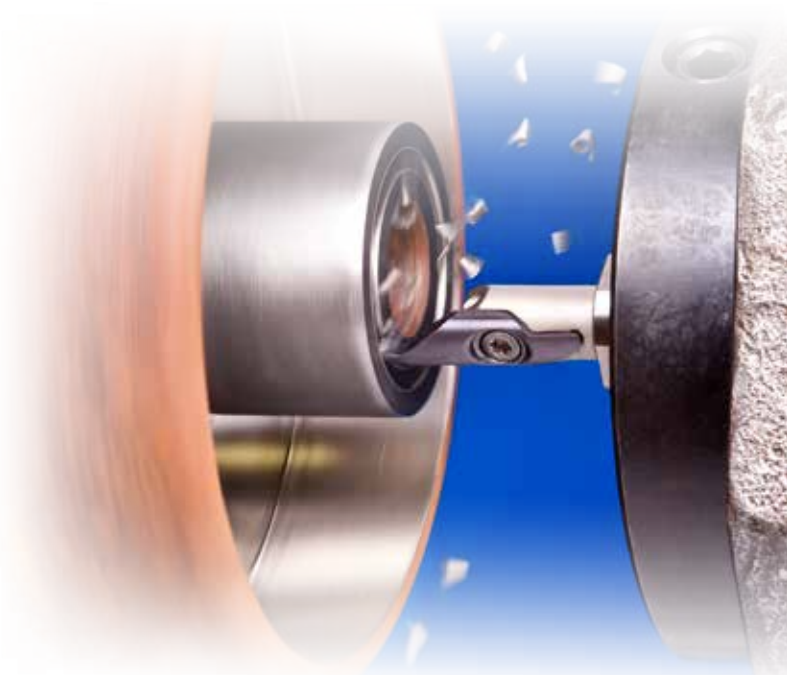

MFHR-JHP

Square Shank Tools for MIFR 10 Face Grooving Inserts

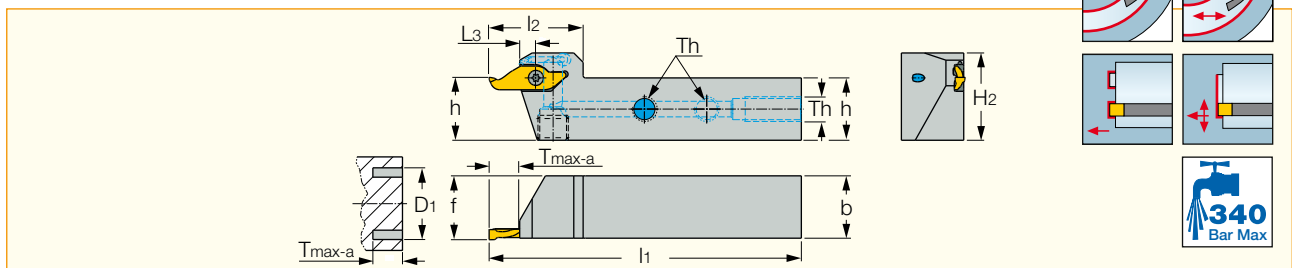

Designation	h	b	l ₁	l ₂	T _{max-a}	D _{1 min}	H ₂	T _h	Insert
MFHR 12C-10-JHP	12.0	12.0	100.00	27.0	9.00	10.0	20.0	UNF 5/16-24	MIFR 10
MFHR 16C-10-JHP	16.0	16.0	100.00	27.0	9.00	10.0	24.0	UNF 5/16-24	MIFR 10
MFHR 20C-10-JHP	20.0	20.0	100.00	30.0	9.00	10.0	28.0	UNF 5/16-24	MIFR 10

• For D1max, refer to insert data

For inserts, see pages: MIFR (18).



Spare Parts



Designation	Screw	Key	Plug
MFHR-JHP	SR 34-506	T-9/5	SR 5/16UNF TL360

MIFR

MINCUT Screw-Clamped Inserts for Internal Face Grooving and Turning, Penetration
Diameter Range: 8-17 mm

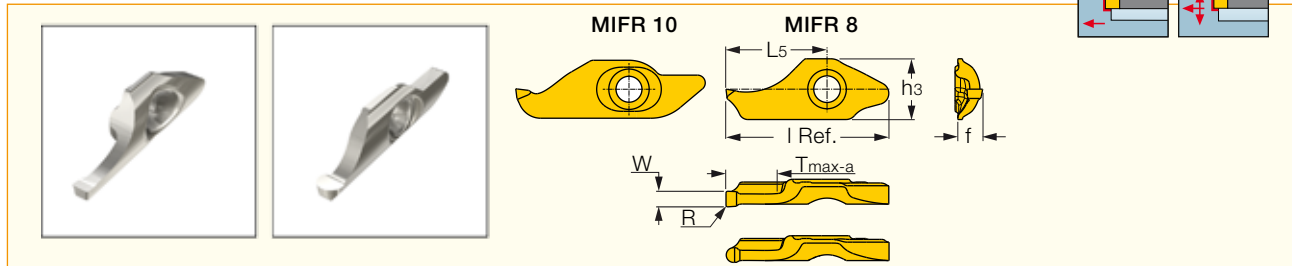



Designation	Dimensions									IC908	Recommended Machining Data	
	I Ref.	W ± 0.02	R ± 0.02	f	h ₃	D _{1 min}	D _{1 max}	T _{max-a}	L ₅		f face-groove (mm/rev)	f face-turn (mm/rev)
MIFR 8-1.50-0.20	17.7	1.50	0.20	2.6	6.5	8.0	11.5	5.70	11.00	●	0.02-0.10	0.02-0.06
MIFR 8-1.60-0.80	17.7	1.60	0.80	2.6	6.5	8.0	12.1	5.70	11.00	●	0.02-0.10	0.02-0.06
MIFR 8-2.00-0.20	17.7	2.00	0.20	2.8	6.5	8.0	15.1	5.70	11.00	●	0.02-0.10	0.02-0.06
MIFR 8-2.20-0.20	17.7	2.20	0.20	2.9	6.5	8.0	17.0	5.70	11.00	●	0.02-0.10	0.02-0.06
MIFR 10-2.00-1.00	25.1	2.00	1.00	2.4	7.6	10.0	30.0	9.00	14.80	●	0.02-0.10	0.02-0.06
MIFR 10-2.50-0.20	25.1	2.50	0.20	3.1	7.6	9.5	30.0	9.00	14.80	●	0.02-0.10	0.02-0.06
MIFR 10-3.00-0.20	25.1	3.00	0.20	3.4	7.6	9.7	30.0	9.00	14.80	●	0.02-0.10	0.02-0.06
MIFR 10-3.00-1.50	25.1	3.00	1.50	3.3	7.6	9.2	34.0	9.00	14.80	●	0.02-0.10	0.02-0.06

• For cutting speed recommendations, see pages 98-114.

For tools, see pages: MFHR-JHP (17) • MIFHR (17).

MIUR 8

45° Full Radius Internal Undercutting Inserts

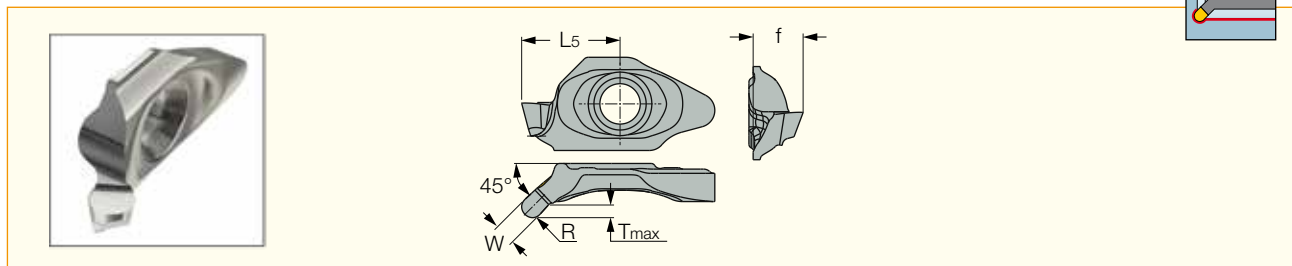


Designation	Dimensions						IC908	Recommended Machining Data		
	W ± 0.02	R ± 0.02	D _{min}	T _{max-r}	L ₅	f		a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
MIUR 8-1.00-0.50	1.00	0.50	8.00	1.10	6.70	3.6	●	0.03-0.50	0.03-0.10	0.01-0.03
MIUR 8-1.5-0.75	1.50	0.75	8.10	1.20	6.70	3.6	●	0.03-0.50	0.03-0.10	0.01-0.03
MIUR 8-2.00-1.00	2.00	1.00	8.30	1.36	6.70	3.6	●	0.03-0.50	0.03-0.10	0.01-0.03

For tools, see pages: MIFHR (17).



KIT MINCUT


Contains One Toolholder and a Set of 6 Different Inserts for Internal Face Grooving and Turning Applications

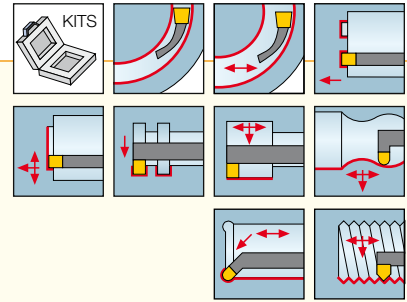


KIT MINCUT Contents


Designation	
MIFHR 12C-8	
MIGR 8-1.60-0.80	IC908
MIFR 8-2.20-0.20	IC908
MITR 8-MT1-0.05	IC908
MIUR 8-1.00-0.50	IC908
MIGR 8-2.00-0.10	IC908
HGHR 2525-16-3T6	IC908







MIFR 8-2.20-0.20
Cat. No. 6404045







MIFR 8-1.60-0.80
Cat. No. 6404049







MIGR 8-2.00-0.10
Cat. No. 6405194







MIGR 8-1.60-0.80
Cat. No. 6404029






MIUR 8-1.00-0.50
Cat. No. 6405188






MITR 8-MT1-0.05
Cat. No. 6405165



HFFH

Face Grooving Blades

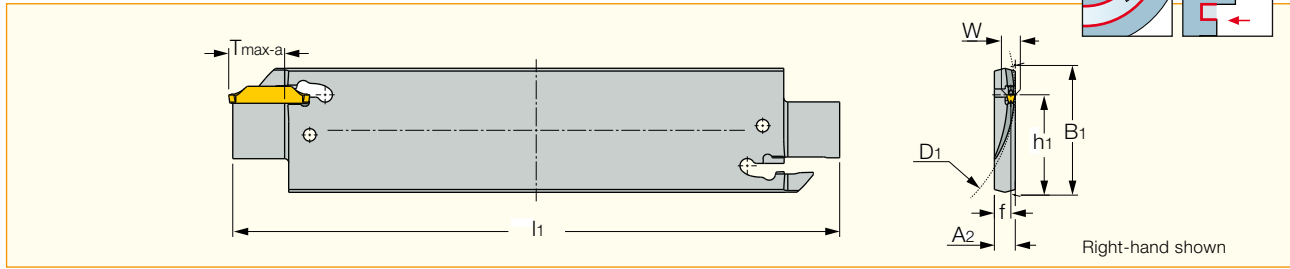

Designation	W	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	T _{max-a}	h ₁	B ₁	f	A ₂	l ₁
HFFH 38R/L-2	2.00	38.0	45.0	14.00	24.8	32.0	8.2	5.2	150.00
HFFH 45R/L-2	2.00	45.0	60.0	14.00	24.8	32.0	8.2	5.2	150.00
HFFH 60R/L-2	2.00	60.0	80.0	14.00	24.8	32.0	8.2	5.2	150.00
HFFH 80R/L-2	2.00	80.0	100.0	14.00	24.8	32.0	8.2	5.2	150.00
HFFH 100R/L-2	2.00	100.0	130.0	14.00	24.8	32.0	8.2	5.2	150.00

• B₁ dimension links blades and blocks

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPN (21).

For holders, see pages: C#-TBK-R/L (59) • HSK A-WH-TBK-R/L (60) • IM63 XMZ TBK (60) • SGTBF (61) • SGTBK (59) • SGTBU/SGTBN (58) • UBHCR/L (61).

Spare Parts




Designation	Extractor
HFFH	EDG 33B*

* Optional, should be ordered separately

HFFA

Reinforced Face Grooving Blades

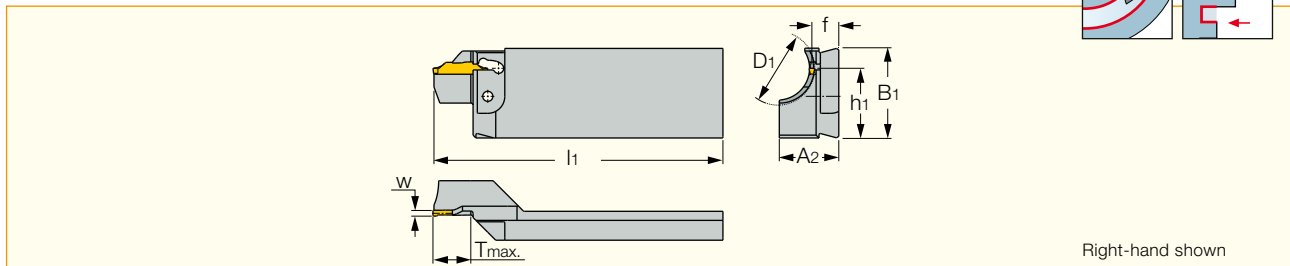

Designation	W	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	T _{max-a}	B ₁	f	h ₁	l ₁	A ₂
HFFA 27R/L-2	2.00	27.0	29.0	14.00	32.0	9.5	24.8	102.00	21.0
HFFA 29R/L-2	2.00	29.0	33.0	14.00	32.0	9.5	24.8	102.00	21.0
HFFA 33R/L-2	2.00	33.0	38.0	14.00	32.0	9.5	24.8	102.00	20.0
HFFA 38R/L-2	2.00	38.0	55.0	14.00	32.0	9.5	24.8	102.00	19.0
HFFA 55R/L-2	2.00	55.0	80.0	14.00	32.0	9.5	24.8	102.00	18.0
HFFA 80R/L-2	2.00	80.0	105.0	14.00	32.0	9.5	24.8	102.00	16.1

• For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPN (21).

For holders, see pages: C#-TBK-R/L (59) • HSK A-WH-TBK-R/L (60) • IM63 XMZ TBK (60) • SGTBK (59) • SGTBU/SGTBN (58) • UBHCR/L (61).

Spare Parts





Designation	Extractor
HFFA	EDG 33B*

* Optional, should be ordered separately

HFPN

Utility Double-Ended Face Machining Inserts

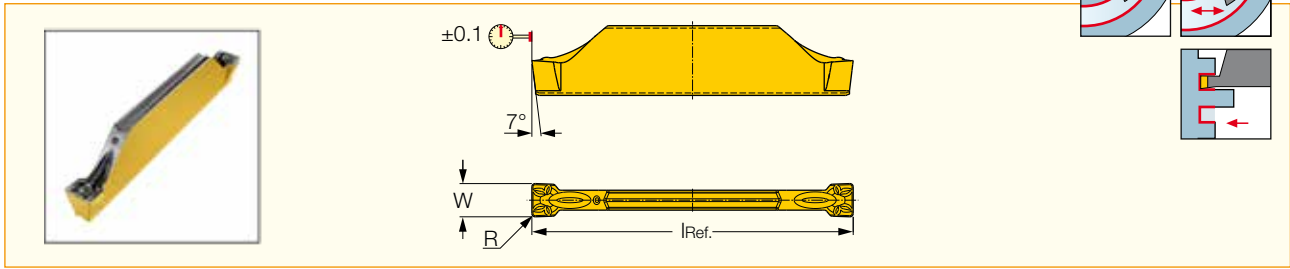

Designation	Dimensions			IC808	Recommended Machining Data
	$W_{\pm 0.04}$	R	l Ref.		f groove (mm/rev)
HFPN 2002	2.00	0.20	19.4	●	0.03-0.10



• For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: HFFA (20) • HFFH (20).



HGHR/L-3

Integral Holders for Face Grooving and Turning, Dmin. 12 mm

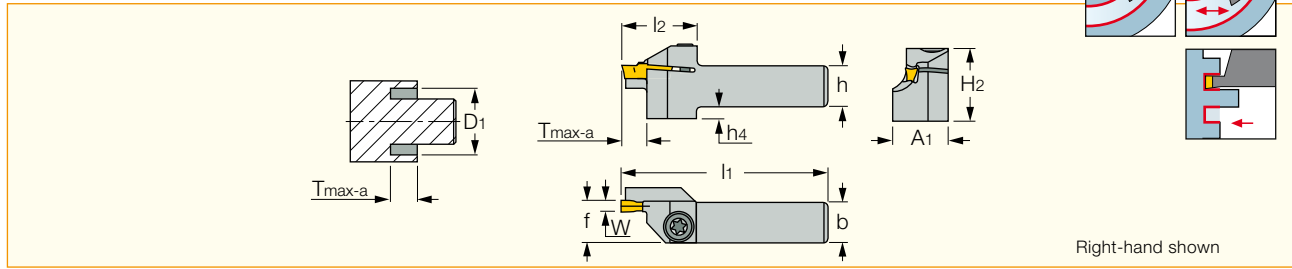

Right-hand shown


Designation	W	T _{max-a}	h	b	h ₄	f	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₁	l ₂	H ₂	A ₁
HGHR/L 1010-12-3T6	3.00	6.00	10.0	10.0	2.0	9.5	12.0	16.0	120.00	19.0	19.0	13.70
HGHR/L 1212-12-3T6	3.00	6.00	12.0	12.0	-	11.0	12.0	16.0	120.00	19.0	19.0	15.70
HGHR/L 1616-12-3T6	3.00	6.00	16.0	16.0	-	15.0	12.0	16.0	120.00	19.0	21.0	19.70
HGHR/L 1616-16-3T6	3.00	6.00	16.0	16.0	-	15.0	16.0	25.0	120.00	19.0	21.0	18.80
HGHR/L 2020-12-3T6	3.00	6.00	20.0	20.0	-	20.0	12.0	16.0	120.00	19.0	25.0	24.00
HGHR/L 2020-16-3T6	3.00	6.00	20.0	20.0	-	20.0	16.0	25.0	120.00	19.0	25.0	24.00
HGHR/L 2525-12-3T6	3.00	6.00	25.0	25.0	-	25.0	12.0	16.0	120.00	19.0	30.0	29.00
HGHR/L 2525-16-3T6	3.00	6.00	25.0	25.0	-	25.0	16.0	25.0	120.00	19.0	30.0	29.00
HGHR 1010-16-3T6	3.00	6.00	10.0	10.0	2.0	9.5	16.0	25.0	120.00	19.0	19.0	12.80
HGHR 1212-16-3T6	3.00	6.00	12.0	12.0	-	11.0	16.0	25.0	120.00	19.0	19.0	14.80

• Use HGN and GRIP inserts with right-hand toolholders only and HGPL inserts with left-hand toolholders • For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: GRIP (45) • GRIP (full radius) (46) • HGN-C (47) • HGN-J (47) • HGN-UT (48) • HGPL (50).

No limitation for widening groove toward or away from center, except for the following tools:



Limitation of widening toward center depends on the major diameter (D) as per chart.

HGHR/L...-12-3T6

D	d
12.0	4.0
13.0	1.0
13.5	0

Spare Parts




Designation	Key	Screw
HGHR/L-3	T-20/3	SR 76-1400



HFHR/L-3T

Integral Holders for Facing, Dmin. 25 mm

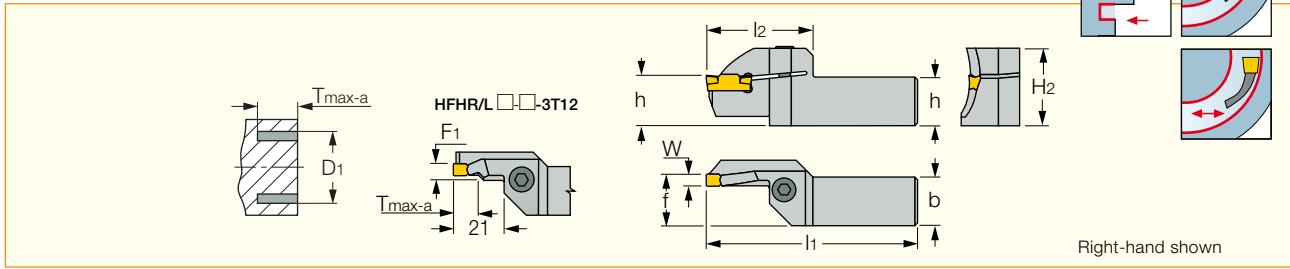

Designation	W	T _{max-a}	h	b	l ₁	f	F ₁	D _{1 min} ⁽²⁾	D _{1 max} ⁽³⁾	l ₂	H ₂
HFHR/L 20-25-3T12	3.00	12.00	20.0	20.0	140.00	20.5	5.3	25.0	30.0	38.0	28.0
HFHR/L 20-30-3T12	3.00	12.00	20.0	20.0	140.00	20.5	5.3	30.0	38.0	38.0	29.0
HFHR/L 20-38-3T12	3.00	12.00	20.0	20.0	140.00	20.5	5.3	38.0	48.0	38.0	30.0
HFHR/L 20-48-3T12	3.00	12.00	20.0	20.0	140.00	20.5	5.3	48.0	60.0	38.0	30.0
HFHR/L 25-25-3T12	3.00	12.00	25.0	25.0	150.00	25.5	5.3	25.0	30.0	38.0	33.0
HFHR/L 25-30-3T12	3.00	12.00	25.0	25.0	150.00	25.5	5.3	30.0	38.0	38.0	34.0
HFHR/L 25-38-3T12	3.00	12.00	25.0	25.0	150.00	25.5	5.3	38.0	48.0	38.0	35.0
HFHR/L 20-60-3T22 ⁽¹⁾	3.00	22.00	20.0	20.0	140.00	20.5	-	60.0	75.0	40.0	31.0
HFHR/L 25-48-3T22 ⁽¹⁾	3.00	22.00	25.0	25.0	150.00	25.5	-	48.0	60.0	40.0	36.0
HFHR/L 25-60-3T22 ⁽¹⁾	3.00	22.00	25.0	25.0	150.00	25.5	-	60.0	75.0	40.0	36.0
HFHR/L 20-75-3T25 ⁽¹⁾	3.00	25.00	20.0	20.0	140.00	20.5	-	75.0	100.0	43.0	31.0
HFHR/L 25-75-3T25 ⁽¹⁾	3.00	25.00	25.0	25.0	150.00	25.5	-	75.0	100.0	43.0	36.0

• For user guide, see pages 98-114.

⁽¹⁾ For deep face grooving only. ⁽²⁾ Minimum penetration diameter ⁽³⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44).

HFHR/L-□-25-3T12

D	d
25	5
26	2
≥27	0

No limitation for widening groove toward or away from center, except for the following tools:


HFHR/L-□-25-4T12

D	d
25	1
≥26	0

HFHR/L-□-29-4T12

D	d
29	1
≥46	0

Limitation of widening toward center (d) depends on the major diameter (D) as per chart.



Spare Parts




Designation	Screw	Key
HFHR/L-3T	SR M6X16DIN912 12.9	HW 5.0



HFHR/L-4T

Integral Holders for Facing, Dmin. 25 mm

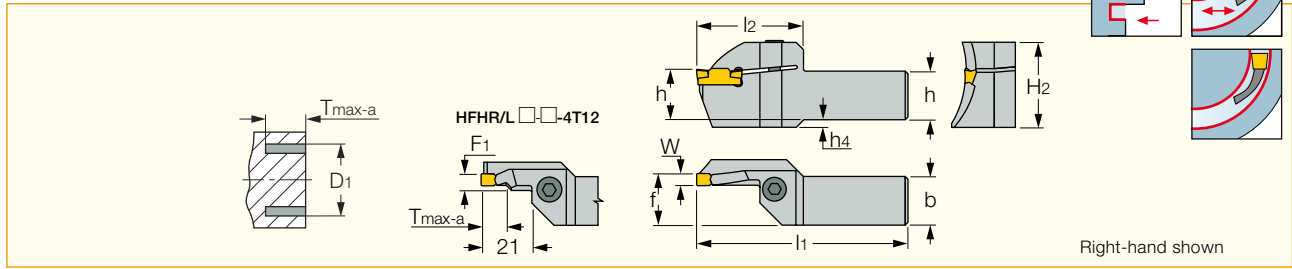

Designation	W	T _{max-a}	h	b	l ₁	f	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₂	H ₂	h ₄
HFHR/L 20-25-4T12	4.00	12.00	20.0	20.0	140.00	20.6	25.0	29.0	39.0	29.0	-
HFHR/L 20-29-4T12	4.00	12.00	20.0	20.0	140.00	20.6	29.0	34.0	39.0	30.0	-
HFHR/L 25-25-4T12	4.00	12.00	25.0	25.0	150.00	25.6	25.0	29.0	39.0	34.0	-
HFHR/L 25-29-4T12	4.00	12.00	25.0	25.0	150.00	25.6	29.0	34.0	39.0	35.0	-
HFHR/L 20-34-4T20	4.00	20.00	20.0	20.0	140.00	20.6	34.0	40.0	39.0	30.0	-
HFHR/L 25-34-4T20	4.00	20.00	25.0	25.0	150.00	25.6	34.0	40.0	39.0	35.0	-
HFHR/L 20-40-4T25	4.00	25.00	20.0	20.0	140.00	20.6	40.0	48.0	44.0	31.0	-
HFHR/L 20-48-4T25	4.00	25.00	20.0	20.0	140.00	20.6	48.0	60.0	44.0	32.0	-
HFHR/L 20-60-4T25	4.00	25.00	20.0	20.0	140.00	20.6	60.0	75.0	44.0	32.0	-
HFHR/L 20-75-4T25	4.00	25.00	20.0	20.0	140.00	20.6	75.0	100.0	44.0	34.0	2.0
HFHR/L 25-100-4T25	4.00	25.00	25.0	25.0	150.00	25.6	100.0	140.0	44.0	37.0	-
HFHR/L 25-140-4T25	4.00	25.00	25.0	25.0	150.00	25.6	140.0	240.0	44.0	37.0	-
HFHR/L 25-240-4T25	4.00	25.00	25.0	25.0	150.00	25.6	240.0	800.0	44.0	37.0	-
HFHR/L 25-40-4T25	4.00	25.00	25.0	25.0	150.00	25.6	40.0	48.0	44.0	36.0	-
HFHR/L 25-48-4T25	4.00	25.00	25.0	25.0	150.00	25.6	48.0	60.0	44.0	37.0	-
HFHR/L 25-60-4T25	4.00	25.00	25.0	25.0	150.00	25.6	60.0	75.0	44.0	37.0	-
HFHR/L 25-75-4T25	4.00	25.00	25.0	25.0	150.00	25.6	75.0	100.0	44.0	37.0	-

• DGN & GRIP 4 mm inserts can be used only with right-hand tools, HGPL 4 mm with left-hand tools. • For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • HGPL (50).

Penetration Range


HFHR/L-□-25-4T12

D	d
25	1
≥26	0

HFHR/L-□-29-4T12

D	d
29	1
≥46	0

Limitation of widening toward center (d) depends on the major diameter (D) as per chart.




Spare Parts



Designation	Screw	Key
HFHR/L-4T	SR M6X16DIN912 12.9	HW 5.0

HFHR/L-5T

Integral Holders for Facing, Dmin. 25 mm

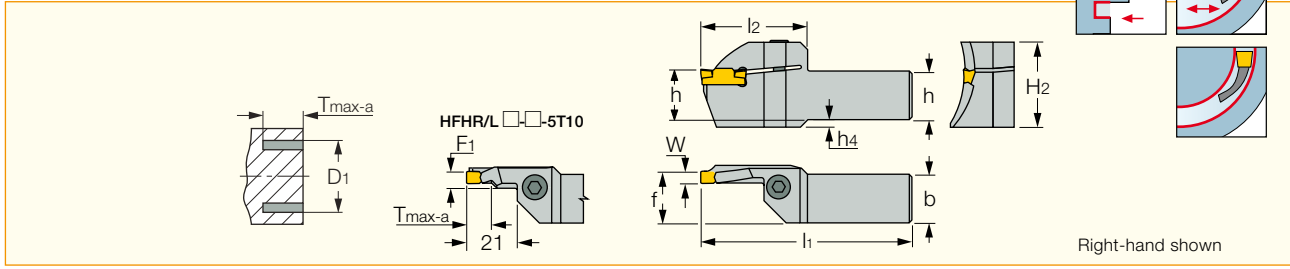

Designation	W	T _{max-a}	h	b	l ₁	F ₁	f	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₂	H ₂	h ₄
HFHR/L 20-25-5T10	5.00	10.00	20.0	20.0	140.00	7.1	21.0	25.0	30.0	38.0	28.0	-
HFHR/L 25-25-5T10	5.00	10.00	25.0	25.0	150.00	7.1	26.0	25.0	30.0	38.0	33.0	-
HFHR/L 25-110-5T14	5.00	14.00	25.0	25.0	150.00	-	23.5	110.0	200.0	32.5	33.0	-
HFHR/L 25-52-5T14	5.00	14.00	25.0	25.0	150.00	-	23.5	52.0	75.0	32.5	33.0	-
HFHR/L 25-75-5T14	5.00	14.00	25.0	25.0	150.00	-	23.5	75.0	110.0	32.5	33.0	-
HFHR/L 20-28-5T15	5.00	17.00	20.0	20.0	140.00	-	21.0	28.0	31.0	34.0	30.0	-
HFHR/L 20-31-5T15	5.00	17.00	20.0	20.0	140.00	-	21.0	31.0	35.0	34.0	30.0	-
HFHR/L 25-28-5T15	5.00	17.00	25.0	25.0	150.00	-	26.0	28.0	31.0	34.0	35.0	-
HFHR/L 25-31-5T15	5.00	17.00	25.0	25.0	150.00	-	26.0	31.0	35.0	34.0	35.0	-
HFHR/L 20-35-5T20	5.00	20.00	20.0	20.0	140.00	-	21.0	35.0	40.0	39.0	31.0	-
HFHR/L 20-40-5T20	5.00	20.00	20.0	20.0	140.00	-	21.0	40.0	45.0	39.0	31.0	-
HFHR/L 25-200-5T20	5.00	20.00	25.0	25.0	150.00	-	23.5	200.0	800.0	32.5	33.0	-
HFHR/L 25-35-5T20	5.00	20.00	25.0	25.0	150.00	-	26.0	35.0	40.0	39.0	36.0	-
HFHR/L 25-40-5T20	5.00	20.00	25.0	25.0	140.00	-	26.0	40.0	45.0	39.0	36.0	-
HFHR/L 20-45-5T25	5.00	25.00	20.0	20.0	140.00	-	21.0	45.0	55.0	44.0	32.0	-
HFHR/L 20-55-5T25	5.00	25.00	20.0	20.0	140.00	-	21.0	55.0	70.0	44.0	35.0	3.0
HFHR/L 25-45-5T25	5.00	25.00	25.0	25.0	150.00	-	26.0	45.0	55.0	44.0	37.0	-
HFHR/L 25-55-5T25	5.00	25.00	25.0	25.0	150.00	-	26.0	55.0	70.0	44.0	37.0	-
HFHR/L 20-70-5T28	5.00	28.00	20.0	20.0	140.00	-	21.0	70.0	95.0	47.0	35.0	3.0
HFHR/L 25-130-5T32	5.00	32.00	25.0	25.0	150.00	-	26.0	130.0	180.0	51.0	37.0	-
HFHR/L 25-180-5T32	5.00	32.00	25.0	25.0	150.00	-	26.0	180.0	800.0	51.0	37.0	-
HFHR/L 25-70-5T32	5.00	32.00	25.0	25.0	150.00	-	26.0	70.0	95.0	51.0	37.0	-
HFHR/L 25-95-5T32	5.00	32.00	25.0	25.0	150.00	-	26.0	95.0	130.0	51.0	37.0	-

- DGN & GRIP 5.. inserts can be used only with right-hand tools, HGPL 5.. inserts with left-hand tools.
- For user guide, see pages 98-114.

(1) Minimum penetration diameter (2) Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45)

• GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48)

• DGN/DGNM-J/JS/JT (49) • DGN-W (49) • HGPL (50).

Spare Parts



Designation	Screw	Key
HFHR/L-5T	SR M6X16DIN912 12.9	HW 5.0

No limitation for widening groove toward or away from center, except for the following tools:

HFHR/L-□-31-5T15

D	d
31	15
32	10
33	7
34	4
35	2
≥36	0

HFHR/L-□-28-5T15


D	d
28	13
29	8
30	5
31	3
32	1
≥33	0

HFHR/L-□-25-5T10

D	d
25	4
26	1
≥27	0

HFHR/L-□-30-6T10


D	d
30	7
31	4
32	1
≥33	0



Limitation of widening toward center (d) depends on the major diameter (D) as per chart.

HFHR/L-6T

Integral Holders for Facing, Dmin. 26 mm

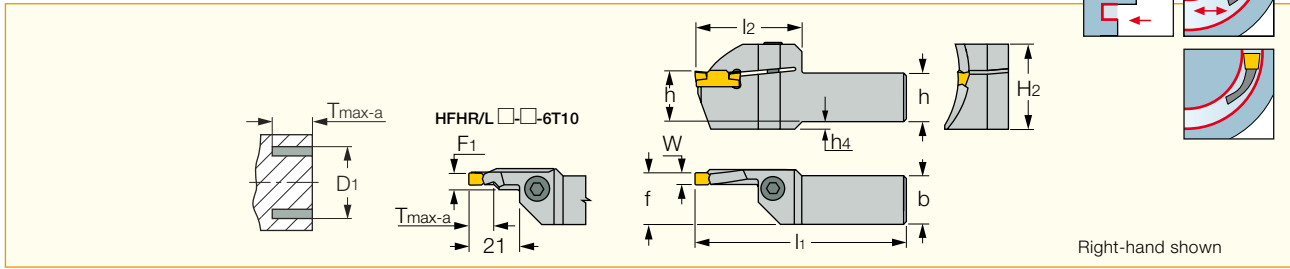

Designation	W	T _{max-a}	h	b	l ₁	F ₁	f	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₂	H ₂	h ₄
HFHL 20-26-6T10	6.00	10.00	20.0	20.0	140.00	7.9	21.4	26.0	30.0	39.0	29.0	-
HFHR/L 20-30-6T15	6.00	17.00	20.0	20.0	140.00	-	21.4	30.0	38.0	36.0	30.0	-
HFHR/L 25-30-6T15	6.00	17.00	25.0	25.0	150.00	-	26.4	30.0	38.0	36.0	35.0	-
HFHR/L 20-38-6T20	6.00	20.00	20.0	20.0	140.00	-	21.4	38.0	50.0	39.0	31.0	-
HFHR/L 25-100-6T20	6.00	20.00	25.0	25.0	150.00	-	26.0	100.0	200.0	40.0	33.0	-
HFHR/L 25-200-6T20	6.00	20.00	25.0	25.0	150.00	-	23.0	200.0	3000.0	37.5	33.0	-
HFHR/L 25-38-6T20	6.00	20.00	25.0	25.0	150.00	-	26.4	38.0	50.0	39.0	36.0	-
HFHR/L 25-50-6T20	6.00	20.00	25.0	25.0	150.00	-	23.0	50.0	65.0	37.5	33.0	-
HFHR/L 25-65-6T20	6.00	20.00	25.0	25.0	150.00	-	23.0	65.0	100.0	37.5	33.0	-
HFHR/L 20-50-6T25	6.00	25.00	20.0	20.0	140.00	-	21.4	50.0	70.0	44.0	32.0	-
HFHR/L 25-50-6T25	6.00	25.00	25.0	25.0	150.00	-	26.4	50.0	70.0	44.0	37.0	-
HFHR/L 25-100-6T32	6.00	32.00	25.0	25.0	150.00	-	26.4	100.0	180.0	51.0	37.0	-
HFHR/L 25-180-6T32	6.00	32.00	25.0	25.0	150.00	-	26.4	180.0	400.0	51.0	40.0	3.0
HFHR/L 25-400-6T32	6.00	32.00	25.0	25.0	150.00	-	26.4	400.0	3000.0	51.0	40.0	3.0
HFHR/L 25-70-6T32	6.00	32.00	25.0	25.0	150.00	-	26.4	70.0	100.0	51.0	37.0	-

• DGN & GRIP 6.. inserts can be used only with right-hand tools, HGPL 6.. inserts with left-hand tools. • For user guide, see pages 98-114.


⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • HGPL (50).

No limitation for widening groove toward or away from center, except for the following tools:

HFHR/L-□-30-6T10

D	d
30	7
31	4
32	1
≥33	0



Limitation of widening toward center (d) depends on the major diameter (D) as per chart.

Spare Parts




Designation	Screw	Key
HFHR/L-6T	SR M6X16DIN912 12.9	HW 5.0

MODULAR-GRIP

HFPAD-3

Adapters for Face Machining

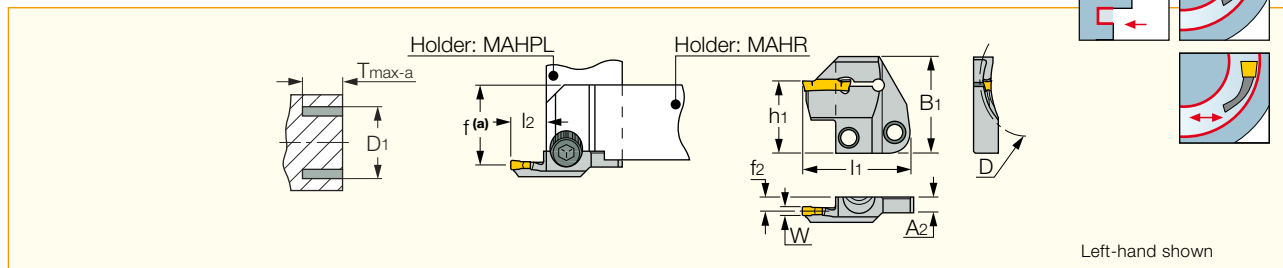

Designation	D1 min ⁽¹⁾	D1 max ⁽²⁾	W	T _{max-a}	l ₂	f ₂	A ₂	l ₁
HFPAD 3R/L-25-T10	25.0	30.0	3.00	10.00	15.0	4.80	5.8	39.50
HFPAD 3R/L-30-T10	30.0	40.0	3.00	10.00	15.0	4.80	5.8	39.50
HFPAD 3R/L-40-T10	40.0	65.0	3.00	10.00	15.0	4.80	5.8	39.50
HFPAD 3R/L-65-T18	65.0	115.0	3.00	18.00	19.0	4.80	5.8	43.50
HFPAD 3R/L-115-T18	115.0	400.0	3.00	18.00	19.0	4.80	5.8	43.50

• $f(a)=f_1(\text{shank}) + f_2(\text{adapter})$ • HGN & GRIP 3.. inserts can be used only with right-hand adapters, HGPL 3.. inserts with left-hand adapters. • For user guide, see pages 98-114.


⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: GRIP (45) • GRIP (full radius) (46) • HGN-C (47) • HGN-J (47) • HGN-UT (48) • HGPL (50).

For holders, see pages: MAHR/L (51) • MAHPR/L (51) • C#-MAHD (53) • C#-MAHPD (54) • C#-MAHUR/L (53) • C#-MAHDR-45 (52)
 • HSK A63WH-MAHUR/L (56) • HSK A-WH-MAHDR/L-45 (55) • HSK A63WH-MAHDOR (56) • IM-MAHD (57) • IM-MAHPD (57).

HFPAD-4

Adapters for Face Machining

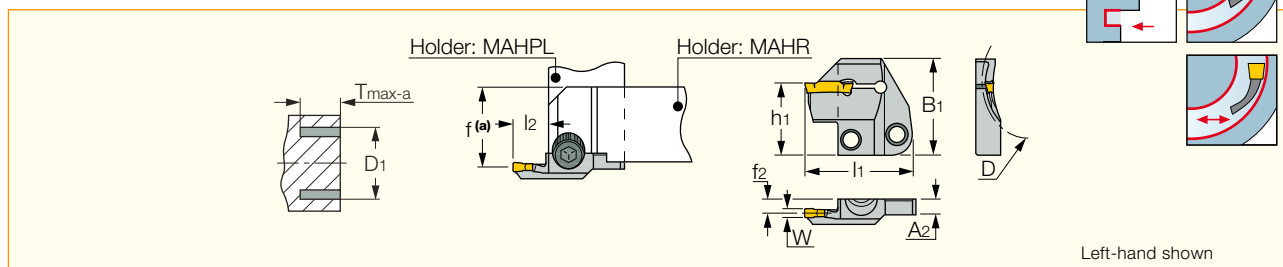

Designation	D1 min ⁽¹⁾	D1 max ⁽²⁾	W	T _{max-a}	l ₂	f ₂	A ₂	l ₁
HFPAD 4R/L-25-T10	25.0	31.0	4.00	10.00	16.0	4.50	5.8	40.50
HFPAD 4R/L-31-T10	31.0	44.0	4.00	10.00	16.0	4.50	5.8	40.50
HFPAD 4R/L-44-T14	44.0	58.0	4.00	14.00	16.0	4.50	5.8	40.50
HFPAD 4R/L-58-T14	58.0	88.0	4.00	14.00	16.0	4.50	5.8	40.50
HFPAD 4R/L-88-T14	88.0	175.0	4.00	14.00	16.0	4.50	5.8	40.50
HFPAD 4R/L-175-T20	175.0	800.0	4.00	20.00	21.0	4.50	6.5	45.50

• $f(a)=f_1(\text{shank}) + f_2(\text{adapter})$ • DGN & GRIP 4.. inserts can be used only with right-hand adapters, HGPL 4.. inserts with left-hand adapters.
 • For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter


For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48)
 • DGN/DGNM-J/JS/JT (49) • HGPL (50).

For holders, see pages: MAHR/L (51) • MAHPR/L (51) • C#-MAHD (53) • C#-MAHPD (54) • C#-MAHUR/L (53) • C#-MAHDR-45 (52)
 • HSK A63WH-MAHUR/L (56) • HSK A-WH-MAHDR/L-45 (55) • HSK A63WH-MAHDOR (56) • IM-MAHD (57) • IM-MAHPD (57).

MODULAR-GRIP

HFPAD-5

Adapters for Face Machining

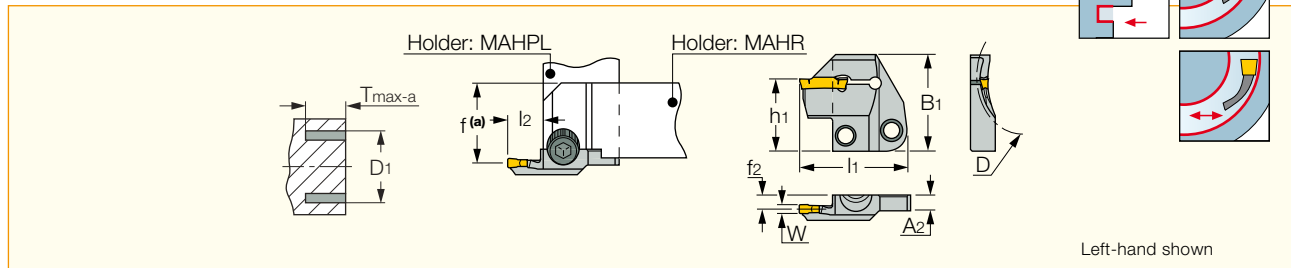

Designation	D ₁ min ⁽¹⁾	D ₁ max ⁽²⁾	W	T _{max-a}	l ₂	f ₂	A ₂	l ₁	h ₁	B ₁
HFPAD 5R/L-40-T14	40.0	50.0	5.00	14.00	16.0	4.50	6.3	40.50	24.0	32.0
HFPAD 5R/L-50-T14	50.0	75.0	5.00	14.00	16.0	4.50	6.3	40.50	24.0	32.0
HFPAD 5R/L-75-T14	75.0	110.0	5.00	14.00	16.0	4.50	6.3	40.50	24.0	32.0
HFPAD 5R/L-110-T14	110.0	200.0	5.00	14.00	16.0	4.50	6.3	40.50	24.0	32.0
HFPAD 5R/L-200-T20	200.0	800.0	5.00	20.00	21.0	4.50	6.6	45.50	24.0	32.0

- $f(a)=f_1(\text{shank}) + f_2(\text{adapter})$ • DGN & GRIP 5.. inserts can be used only with right-hand adapters, HGPL 5.. inserts with left-hand adapters.
- For user guide, see pages 98-114.


⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • DGN-W (49) • HGPL (50).

For holders, see pages: MAHR/L (51) • MAHPR/L (51) • C#-MAHD (53) • C#-MAHPD (54) • C#-MAHUR/L (53) • C#-MAHDR-45 (52) • HSK A63WH-MAHUR/L (56) • HSK A-WH-MAHDR/L-45 (55) • HSK A63WH-MAHDOR (56) • IM-MAHD (57) • IM-MAHPD (57).

HFPAD-6

Adapters for Face Machining

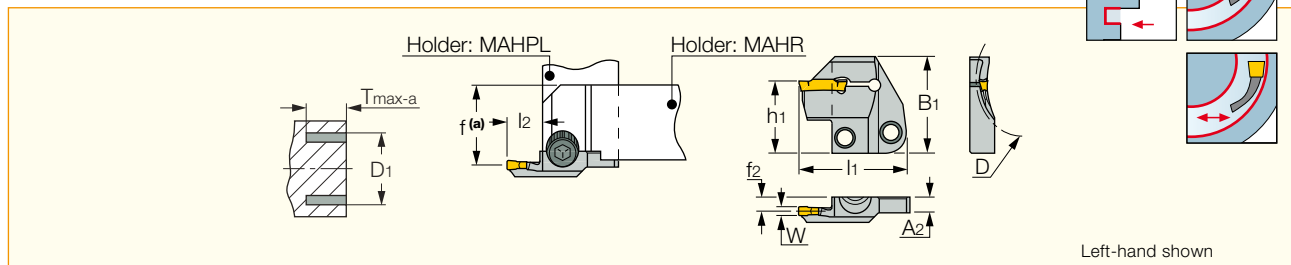

Designation	D ₁ min ⁽¹⁾	D ₁ max ⁽²⁾	W	T _{max-a}	l ₂	f ₂	A ₂	l ₁	h ₁	B ₁
HFPAD 6R/L-60-T14	60.0	100.0	6.00	14.00	16.0	4.50	6.8	40.50	24.0	32.0
HFPAD 6R/L-100-T20	100.0	200.0	6.00	20.00	21.0	4.50	6.8	45.50	24.0	32.0
HFPAD 6R/L-200-T20	200.0	3000.0	6.00	20.00	21.0	4.50	7.1	45.50	24.0	32.0

- $f(a)=f_1(\text{shank}) + f_2(\text{adapter})$ • DGN & GRIP 6.. inserts can be used only with right-hand adapters, HGPL 6.. inserts with left-hand adapters.
- For user guide, see pages 98-114.


⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • HGPL (50).

For holders, see pages: MAHR/L (51) • MAHPR/L (51) • C#-MAHD (53) • C#-MAHPD (54) • C#-MAHUR/L (53) • C#-MAHDR-45 (52) • HSK A63WH-MAHUR/L (56) • HSK A-WH-MAHDR/L-45 (55) • HSK A63WH-MAHDOR (56) • IM-MAHD (57) • IM-MAHPD (57).

HFFR/L-T

Blades for Face Machining

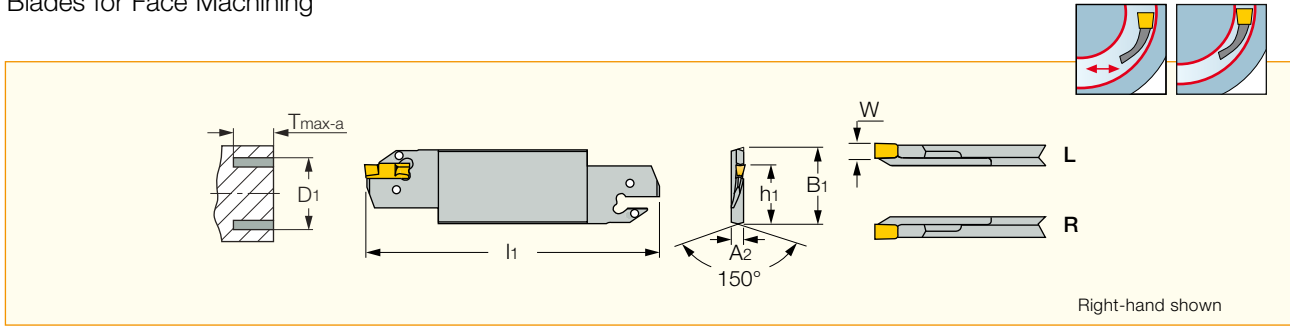

Designation	W	D1 min ⁽²⁾	T _{max-a}	D1 max ⁽³⁾	l ₁	B ₁	A ₂
HFFR/L 48-4T25 ⁽¹⁾	4.00	48.0	25.00	60.0	150.00	32.0	5.2
HFFR/L 60-4T25	4.00	60.0	25.00	75.0	150.00	32.0	5.2
HFFR/L 75-4T30	4.00	75.0	30.00	140.0	150.00	32.0	5.2
HFFR/L 140-4T30	4.00	140.0	30.00	1500.0	150.00	32.0	3.2
HFFR/L 70-5T32	5.00	70.0	32.00	95.0	150.00	32.0	5.2
HFFR/L 95-5T35	5.00	95.0	35.00	130.0	150.00	32.0	5.2
HFFR/L 130-5T38	5.00	130.0	38.00	180.0	150.00	32.0	5.2
HFFR/L 180-5T38	5.00	180.0	38.00	1500.0	150.00	32.0	4.0
HFFR/L 90-6T32	6.00	90.0	32.00	180.0	150.00	32.0	5.2
HFFR/L 180-6T38	6.00	180.0	38.00	400.0	150.00	32.0	5.2

- After initial groove, no limitation to widening groove outward or toward center.
- DGN & GRIP inserts can be used only with right-hand adapters, HGPL inserts with left-hand blades. • For user guide, see pages 98-114.

⁽¹⁾ HGPL 4...Y with LH blade. ⁽²⁾ Minimum penetration diameter ⁽³⁾ Maximum penetration diameter

For inserts, see pages: HFFR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • DGN-W (49) • HGPL (50).

For holders, see pages: SGTBF (61) • SGTBU/SGTBN (58) • UBHCR/L (61).

Spare Parts




Designation	Extractor
HFFR/L-T	EDG 33B*

* Optional, should be ordered separately

HGAER/L-3

Adapters for External Facing Along Shafts

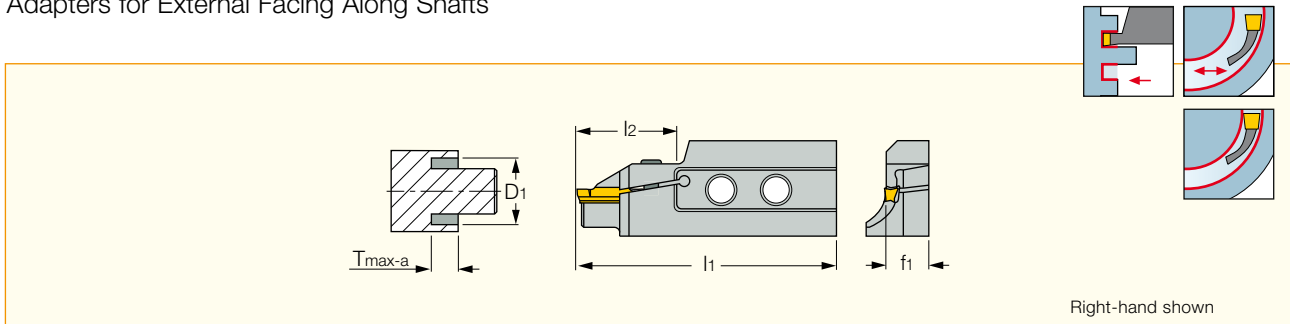

Designation	T _{max-a}	W	D1 min ⁽¹⁾	D1 max ⁽²⁾	l ₂	f ₁	l ₁
HGAER/L 12-3M	2.00	3.00	12.0	500.0	21.0	10.2	55.00
HGAER/L 12-3T6	6.00	3.00	12.0	15.0	21.0	10.2	55.00
HGAER/L 14-3T7	7.00	3.00	14.0	17.0	21.0	10.2	55.00
HGAER/L 17-3T8	8.00	3.00	17.0	21.0	21.0	10.2	55.00
HGAER/L 21-3T9	9.00	3.00	21.0	25.0	21.0	10.2	55.00

- GRIP 3... inserts can be used with right-hand adapters only, HGPL 3 with left-hand adapters. • For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: GRIP (45) • GRIP (full radius) (46) • HGPL (50).

For holders, see pages: C#-HAD (33) • C#-HAPR/L (32) • HAPR/L (31) • HAR/L (31) • IM-HAD (33) • IM-HAPR/L (32).


Spare Parts



Designation	Screw	Key
HGAEL 12-3M	SR 16-236 P	T-15/5
HGAER 12-3M	SR 16-236 P	T-15/3
HGAEL 12-3T6	SR 16-236 P	T-15/5
HGAER 12-3T6	SR 16-236 P	T-15/3
HGAER/L 14-3T7	SR 16-236 P	T-15/3
HGAEL 17-3T8	SR 16-236 P	T-15/5
HGAER 17-3T8	SR 16-236 P	T-15/3
HGAER/L 21-3T9	SR 16-236 P	T-15/3

HFAER/L-4T

Adapters for External Facing Along Shafts

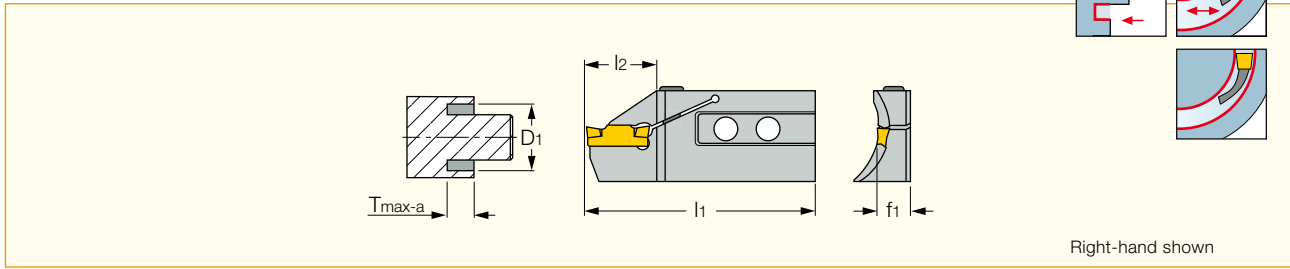

Right-hand shown

Designation	T _{max-a}	W	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₁	l ₂	f ₁
HFAER/L 40-4T20	20.00	4.00	40.0	48.0	68.50	21.0	11.6
HFAER/L 48-4T20	20.00	4.00	48.0	60.0	68.50	21.0	11.6
HFAER/L 60-4T25	25.00	4.00	60.0	75.0	68.50	26.0	11.6
HFAER/L 75-4T25	25.00	4.00	75.0	100.0	68.50	26.0	11.6

• DGN & GRIP inserts can be used only with right-hand adapters, HGPL inserts with left-hand blades. • For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46)
• DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • HGPL (50).

For holders, see pages: C#-HAD (33) • C#-HAPR/L (32) • HAPR/L (31) • HAR/L (31) • IM-HAD (33) • IM-HAPR/L (32).


Spare Parts



Designation	Screw	Key
HFAER/L-4T	SR M5X16DIN912 12.9	HW 4.0

HFAER/L-5T, 6T

Adapters for External Facing Along Shafts

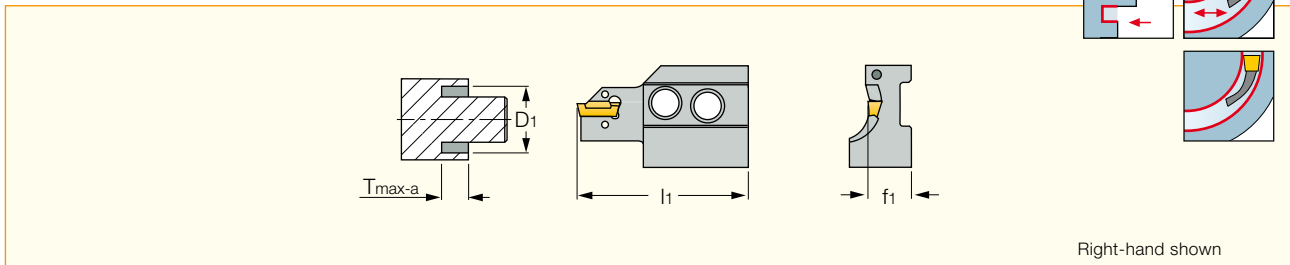

Right-hand shown

Designation	W	T _{max-a}	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₁	f ₁
HFAER/L 70C-5T25	5.00	25.00	70.0	95.0	66.00	12.2
HFAER/L 95C-5T25	5.00	25.00	95.0	130.0	66.00	12.2
HFAER/L 70C-6T28	6.00	28.00	70.0	100.0	69.00	12.3
HFAER/L 100C-6T32	6.00	32.00	100.0	180.0	73.00	12.3
HFAER/L 180C-6T32	6.00	32.00	180.0	400.0	73.00	12.3

• After initial groove, no limitation to widening groove outward from or toward center. • Adapters can be mounted on standard HAR/L, HAPR/L, HAI holders for external machining. • DGN & GRIP inserts can be used only with right-hand adapters, HGPL inserts with left-hand blades. • For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46)
• DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • DGN-W (49) • HGPL (50).

For holders, see pages: C#-HAD (33) • C#-HAPR/L (32) • HAPR/L (31) • HAR/L (31) • IM-HAD (33) • IM-HAPR/L (32).

Spare Parts




Designation	Extractor
HFAER/L-5T, 6T	EDG 33B*

* Optional, should be ordered separately

HAPR/L

Face Machining Perpendicular Holders for Adapters

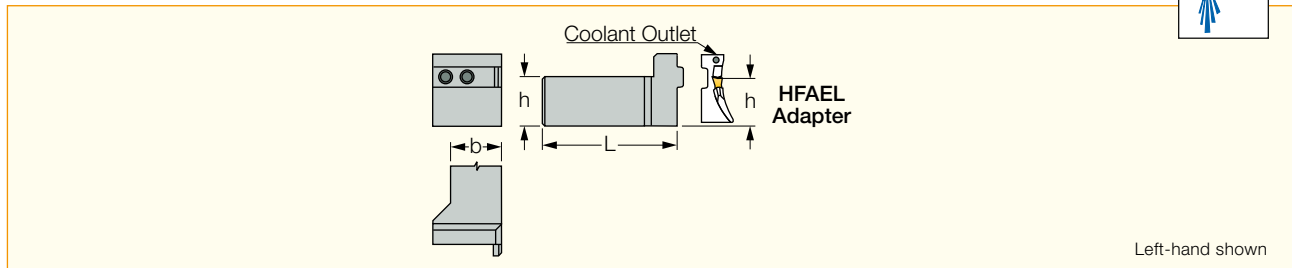

Designation	L	h	b
HAPR/L 25C	124.00	25.0	25.0
HAPR/L 32C	139.00	32.0	32.0

• Holders for adapters HFAER/L & HGAER/L, HFAIR/L & HGAIIR/L.

For tools, see pages: HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HGAER/L-3 (29) • HGAIIR/L-3 (38).


Spare Parts



Designation	Key	Screw
HAPR/L	T-20/3	SR 14-519

HAR/L

Face Machining Adapter Holders

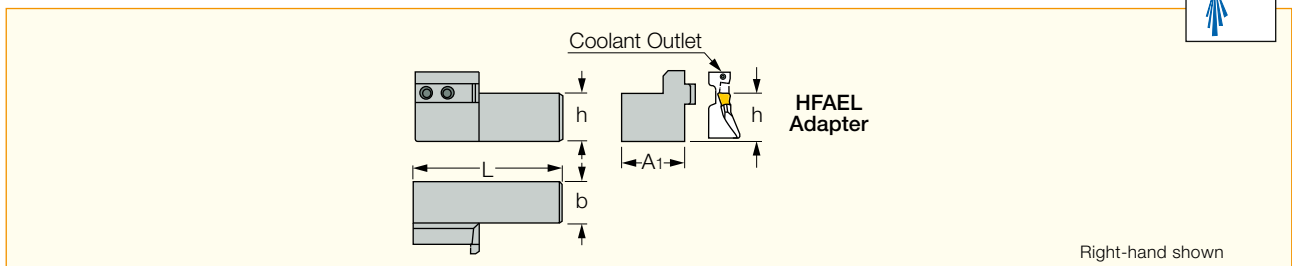

Designation	L	b	h	A ₁	W
HAR/L 25C	110.00	25.0	25.0	39.00	-
HAR/L 32C	130.00	32.0	32.0	46.00	-

• Holders for adapters HFAER/L & HGAER/L, HFAIR/L & HGAIIR/L.

For tools, see pages: HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HGAER/L-3 (29) • HGAIIR/L-3 (38).

Spare Parts




Designation	Key	Screw
HAR/L	T-20/3	SR 14-519

EXCHANGEABLEHEADS • CAMFIX

C#-HAPR/L

Perpendicular Holders for Internal Facing Adapters with CAMFIX Exchangeable, Tapered Shanks

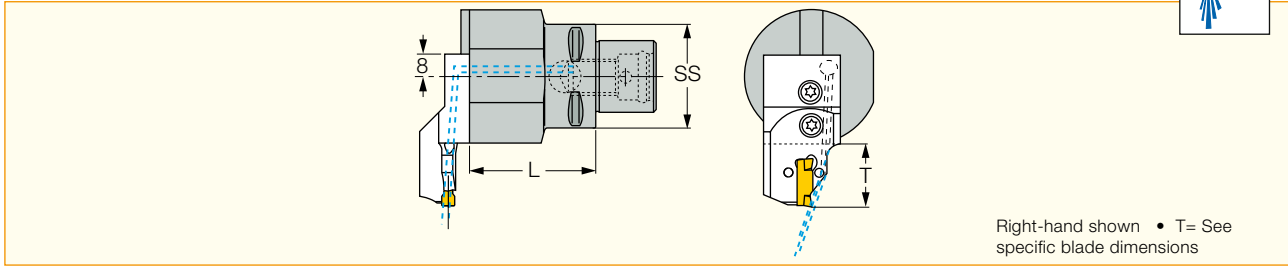

Designation	SS	L
C4 HAPR/L	40	50.00
C6 HAPR/L	63	50.00

For tools, see pages: HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HGAER/L-3 (29) • HGAIR/L-3 (38).


Spare Parts



Designation	Screw	Key
C#-HAPR/L	SR 14-519	T-20/3

IM-HAPR/L

Perpendicular Holders for Internal Facing Adapters with ISO 26622-1(*) Tapered Shank

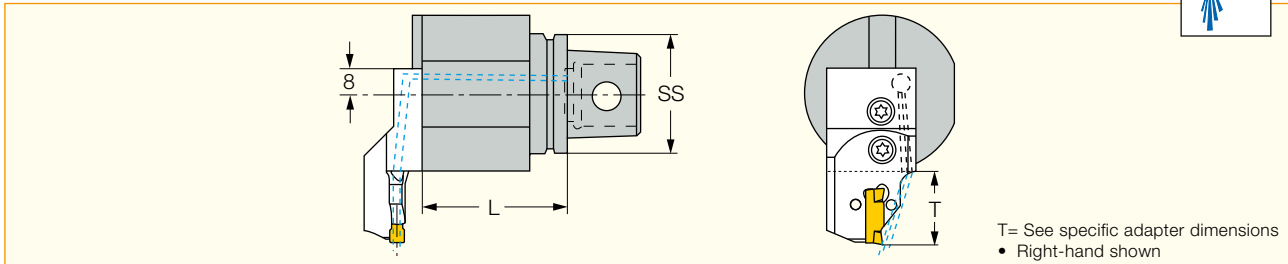

Designation	SS	L
IM40 HAPR/L	40	50.00
IM50 HAPR	50	50.00

• (*) Tools with orientation holes in the flange groove can be supplied on request

For tools, see pages: HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HGAER/L-3 (29) • HGAIR/L-3 (38).

Spare Parts




Designation	Screw	Key
IM-HAPR/L	SR 14-519	T-20/3

EXCHANGEABLEHEADS • CAMFIX

C#-HAD

Holders for Internal Facing Adapters with CAMFIX Exchangeable Tapered Shanks

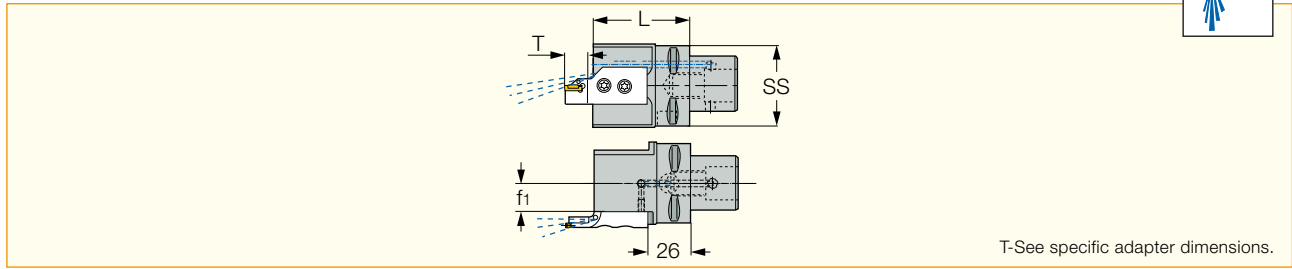

Designation	SS	L	f ₁
C4 HAD	40	60.00	18.0
C5 HAD	50	60.00	18.0
C6 HAD	63	60.00	22.0

For tools, see pages: HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HGAER/L-3 (29) • HGAIR/L-3 (38).


Spare Parts



Designation	Side Locking Screw	Key	Screw	Key 1
C4 HAD	SR 14-519	T-20/3	SR M4X6DIN912	HW 3.0
C5 HAD	SR 14-519	T-20/3	SR M4X6DIN912	HW 3.0
C6 HAD	SR 14-519	T-20/3	SR M4X6	HW 2.0

IM-HAD

Holders for Internal Facing Adapters with ISO 26622-1(*) Tapered Shank

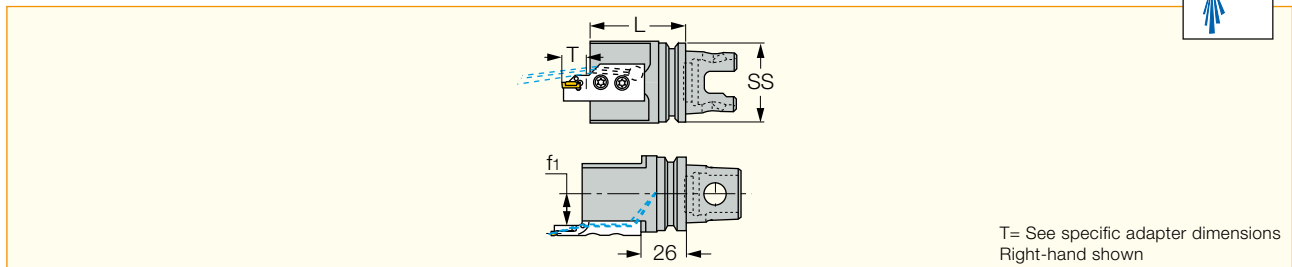

Designation	SS	L	f ₁
IM40 HAD	40	60.00	18.0
IM50 HAD	50	60.00	18.0

• (*) Tools with orientation holes in the flange groove can be supplied on request

For tools, see pages: HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HGAER/L-3 (29) • HGAIR/L-3 (38).



Spare Parts



Designation	Side Locking Screw	Key	Screw	Key 1	Screw 1
IM-HAD	SR 14-519	T-20/3	SR M5X10DIN916	HW 3.0	SR M4X6DIN912

HFHR/L-M

Toolholders for Shallow Face Grooving

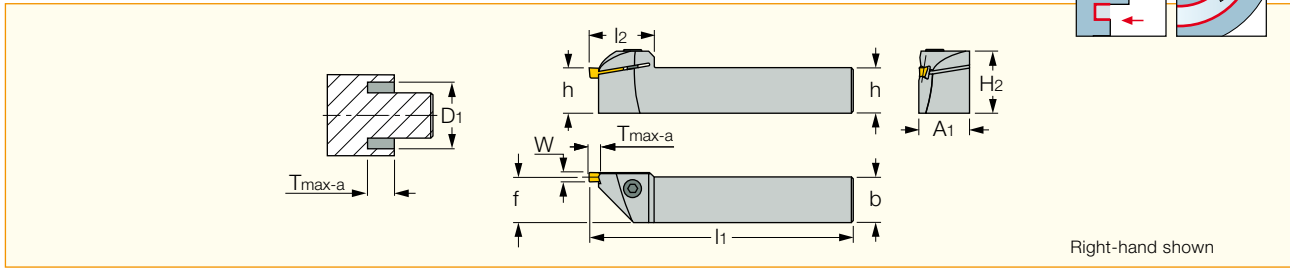

Designation	Ord	W _{min}	W _{max}	T _{max-a}	f	h	b	l ₁	D ₁ min ⁽¹⁾	D ₁ max ⁽²⁾	H ₂	A ₁
HFHR/L 20M	1	3.00	6.00	5.30	20.0	20.0	20.0	130.00	20.0	2000.0	29.0	22.50
HFHR/L 25M	2	3.00	6.00	5.30	25.0	25.0	25.0	150.00	20.0	2000.0	34.0	27.50

- DGN & GRIP 4.. - 6.. inserts can be used only with right-hand tools, HGPL 4.. - 6.. inserts with left-hand tools.
- After initial groove, no limitation to widening groove outward or toward center. • For user guide, see pages 98-114 .

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter


Spare Parts



Designation	Key	Screw
HFHR/L-M	HW 5.0	SR M6X16DIN912 12.9


HFHR/L-□M & HFHPR/L-□M Integral Toolholders

For shallow machining to max. 5 mm depth of groove. One toolholder can be mounted with inserts in 3-6 mm widths. The initial major diameter groove is limited by the insert geometry in each size. After initial groove, face recessing outward or toward center is not limited by insert geometry.

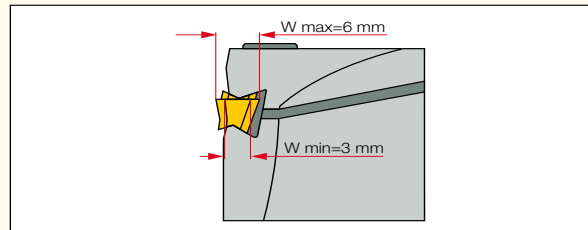



Insert initial face grooving range

W	D ₁	
	Min.	Max.
3	24	60
4	23	90
5	21	300
6	20	∞



HFHPR/L-M

Perpendicular Toolholders for Shallow Face Grooving

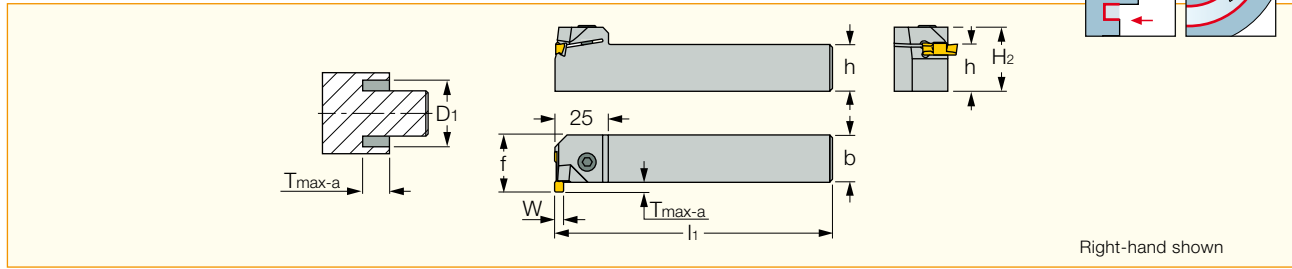

Designation	W _{min}	W _{max}	T _{max-a}	f	h	b	l ₁	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	H ₂
HFHPR/L 20M	3.00	6.00	5.00	25.3	20.0	20.0	130.00	20.0	2000.0	29.0
HFHPR/L 25M	3.00	6.00	5.00	30.3	25.0	25.0	150.00	20.0	2000.0	34.0

- DGN & GRIP 4.. - 6.. inserts can be used only with right-hand tools, HGPL 4.. - 6.. inserts with left-hand tools.
- After initial groove, no limitation to widening groove outward or toward center. • For user guide, see pages 98-114.


⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44).

Spare Parts



Designation	Key	Screw
HFHPR/L-M	HW 5.0	SR M6X20DIN912 12.9

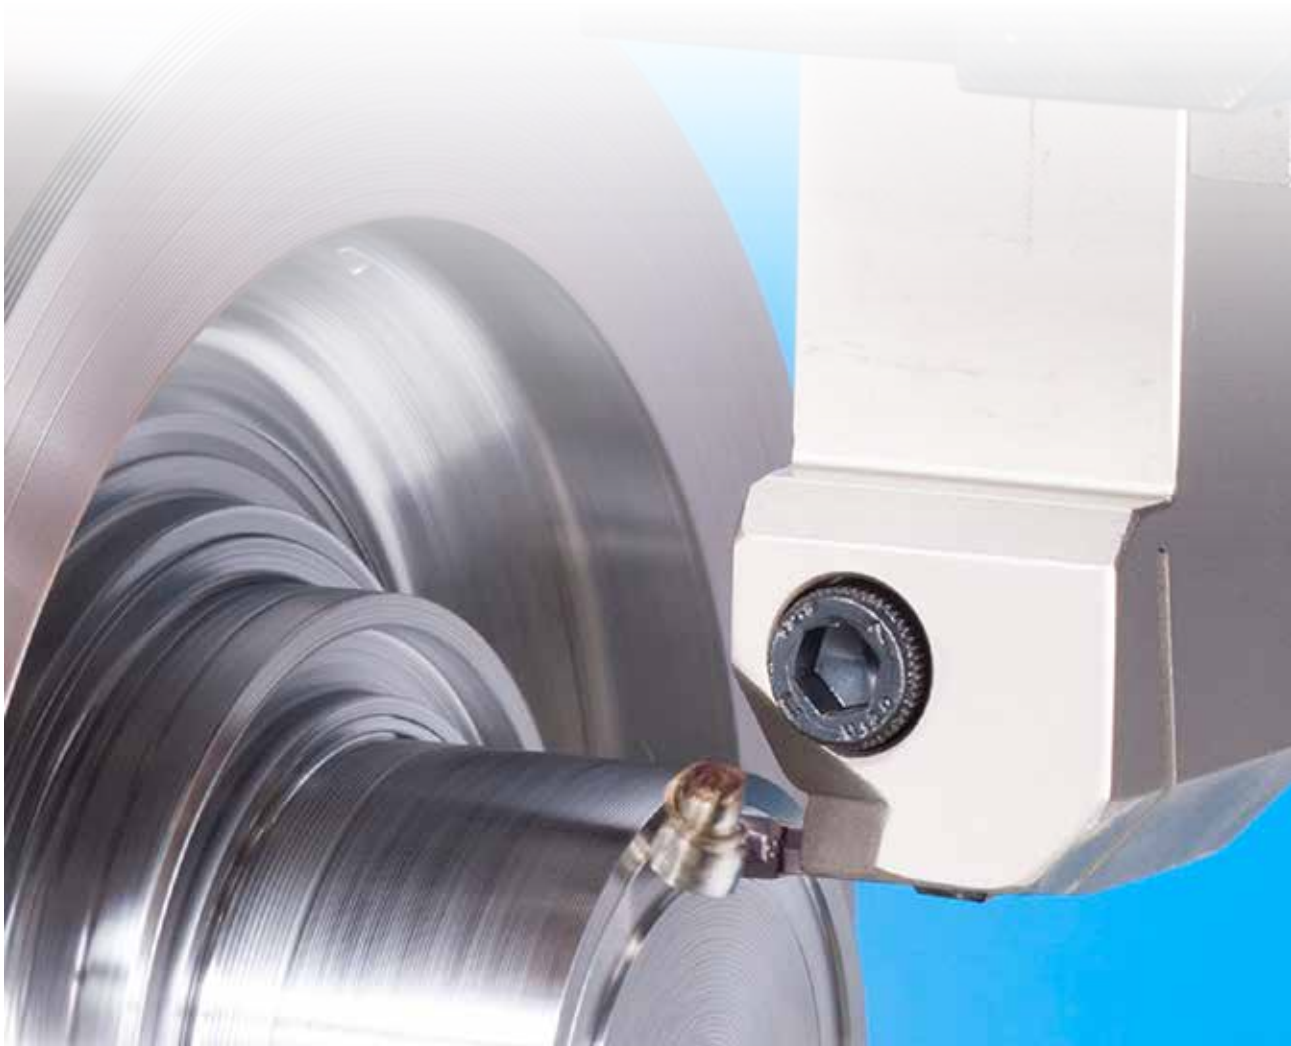

Boring Bars for Adapters



HGAIR/L & HFAIR/L Adapters and HAI Holders

Adapter clamped on HAI round shank holders can machine deep internal boring and grooving applications. The tool can bore down to bottom.

Tool is supplied with internal coolant for better performance.



HFAIR/L & HGAIR/L

Exchangeable adapters, see pages 38, 40




HAI Holders for adapters, see page 38.


HFAIR/L HGAIR/L	- □	C	- □	T □
HELIFACE Internal adapters Right or left	Min. initial groove diameter	Internal coolant	Insert width	Max. depth of groove

Boring Bars for Adapters

HAI Holder System Assembly

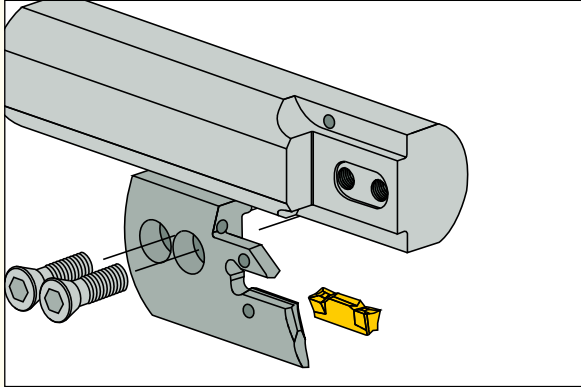

HFAIL & HGAIL
Left-hand Adapters



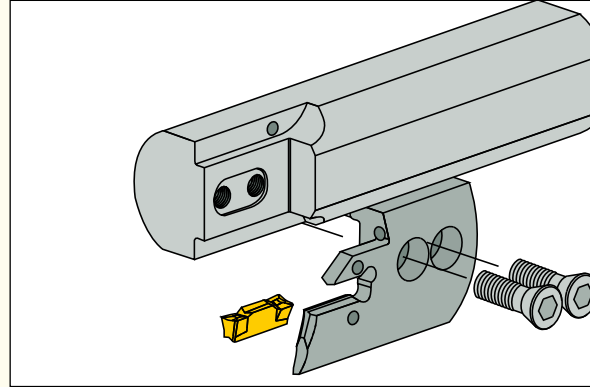


HFAIR & HGAIR
Right-hand Adapters

The same HAI boring bar can be used with right- and left-hand adapters in a wide range of face machining applications. The two screws and the central guiding

slot on the adapter correspond to the key and holes on the holder ensuring strong, safe, and accurate clamping.


Coolant System

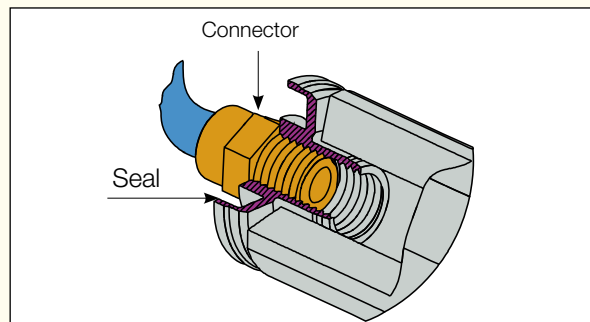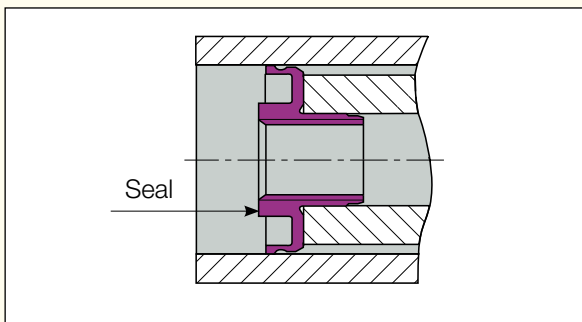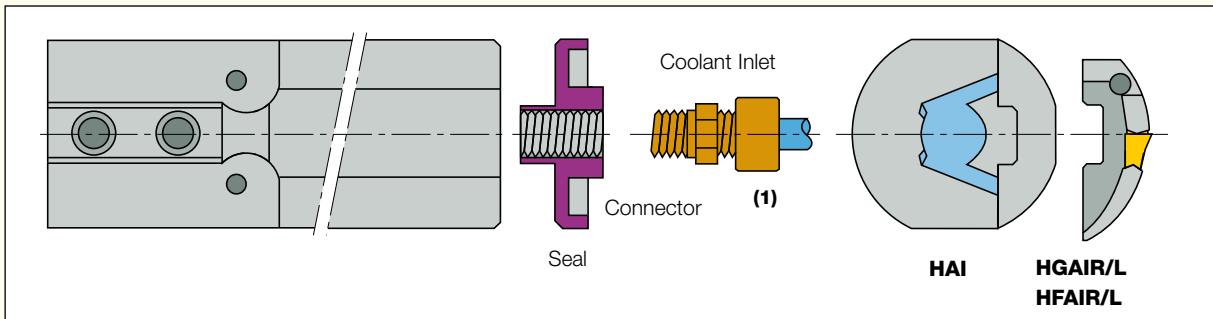

⁽¹⁾ Connector for coolant inlet BSP 1/8 thread. For PL-20, use M6 thread.
Connector not supplied with tools.

HGAIR/L-3

Adapters for Internal Face Grooving and Turning

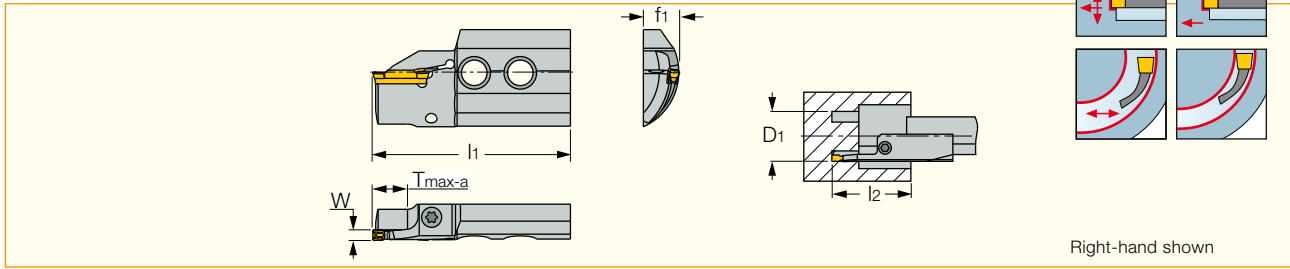


Designation	T _{max-a}	W	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₁	f ₁	l ₂
HGAIR/L 12-3M	2.00	3.00	12.0	500.0	55.00	10.2	21.0
HGAIR/L 12-3T6	6.00	3.00	12.0	15.0	55.00	10.2	21.0
HGAIR/L 14-3T7	7.00	3.00	14.0	17.0	55.00	10.2	21.0
HGAIR/L 17-3T8	8.00	3.00	17.0	21.0	55.00	10.2	21.0
HGAIR/L 21-3T9	9.00	3.00	21.0	25.0	55.00	10.2	21.0
HGAIR/L 25-3T9	9.00	3.00	25.0	34.0	55.00	10.2	21.0
HGAIR/L 35-3T10	10.00	3.00	35.0	45.0	56.00	10.3	22.0
HGAIR/L 45-3T10	10.00	3.00	45.0	65.0	56.00	10.3	22.0
HGAIR/L 65-3T18	18.00	3.00	65.0	115.0	64.00	11.3	30.0
HGAIR/L 115-3T18	18.00	3.00	115.0	400.0	64.00	11.3	30.0

For holders, see pages: C#-HAD (33) • C#-HAPR/L (32) • HAI-C (39) • HAPR/L (31) • HAR/L (31) • IM-HAD (33) • IM-HAPR/L (32).

For user guide, see pages 98-114.


Spare Parts



Designation	Key	Screw
HGAIR/L-3	T-15/3	SR 16-236 P

HFAIR/L-4

Adapters for Internal Face Grooving and Turning

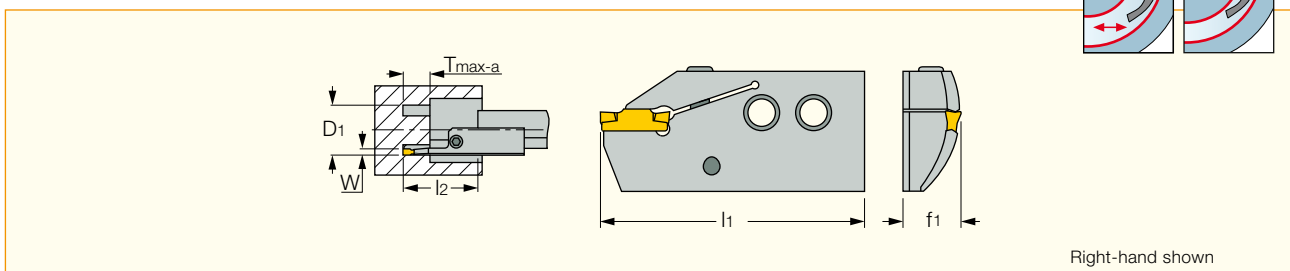

Designation	T _{max-a}	W	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	l ₁	f ₁	l ₂
HFAIR/L 34-4T18	18.00	4.00	34.0	40.0	67.00	15.3	33.0
HFAIR/L 40-4T20	20.00	4.00	40.0	48.0	67.00	15.3	33.0
HFAIR/L 48-4T20	20.00	4.00	48.0	60.0	67.00	15.3	33.0
HFAIR/L 60-4T25	25.00	4.00	60.0	75.0	67.00	15.3	33.0

• DGN & GRIP inserts can be used only with right-hand adapters, HGPL inserts with left-hand blades. • For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • HGPL (50).

For holders, see pages: C#-HAD (33) • C#-HAPR/L (32) • HAI-C (39) • HAPR/L (31) • HAR/L (31) • IM-HAD (33) • IM-HAPR/L (32).


Spare Parts



Designation	Screw	Key
HFAIR/L-4	SR M5X16DIN912 12.9	HW 4.0

HAI-C

Boring Bars with Coolant Holes for Internal Grooving and Turning Adapters

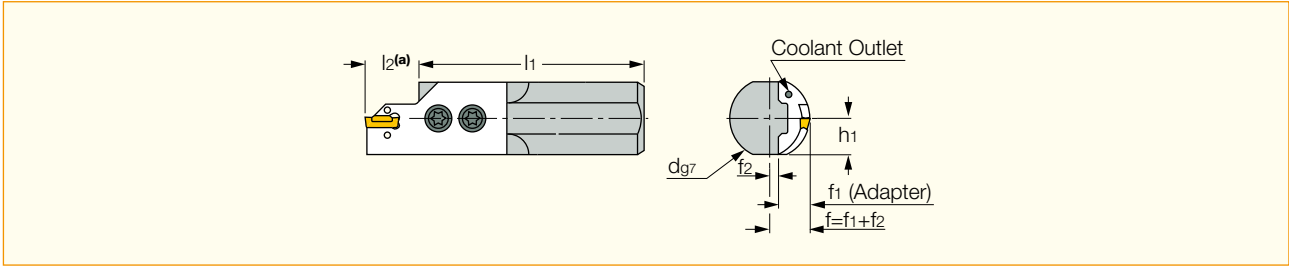

Designation	d	l ₁	h ₁	f ₂	Coolant
HAI 20	20.00	130.00	9.0	0.50	N
HAI 25C	25.00	150.00	11.5	3.00	Y
HAI 32C	32.00	200.00	14.5	6.50	Y
HAI 40C	40.00	250.00	18.0	10.50	Y

• (a) l₂ - see corresponding adapters • The HAI boring bars can be used with right- and left-hand adapters.

For tools, see pages: HFAIR/L-4 (38) • HFAIR/L-DG (40) • HGAIR/L-3 (38).

Spare Parts




Designation	Screw	Key	Seal
HAI 20	SR 14-519	T-20/3	
HAI 25C	SR 14-519	T-20/3	PL 25
HAI 32C	SR 14-519	T-20/3	PL 32
HAI 40C	SR 14-519	T-20/3	PL 40



HFAIR/L-DG

Adapters for Internal Face Grooving and Turning

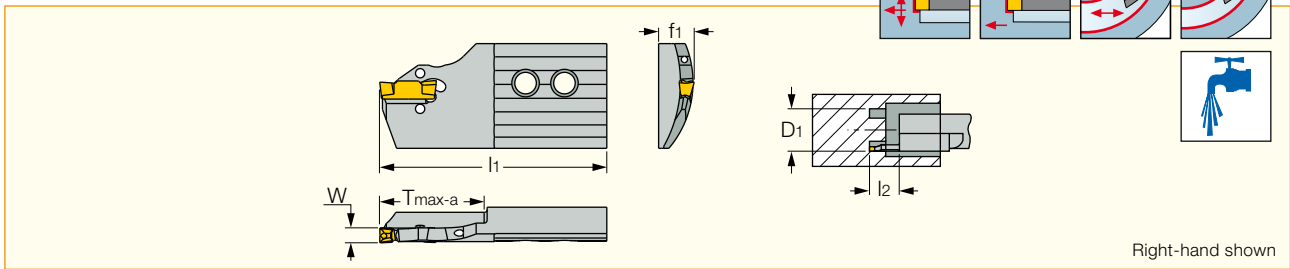

Right-hand shown

Designation	W	D1 min ⁽¹⁾	D1 max ⁽²⁾	Tmax-a	f1	l2	l1
HFAIR/L 75C-4T30DG	4.00	75.0	140.0	30.00	10.9	34.5	68.50
HFAIR/L 140C-4T30DG	4.00	140.0	-	30.00	10.9	34.5	68.50
HFAIR/L 55C-5T25DG	5.00	55.0	70.0	25.00	11.9	32.0	66.00
HFAIR/L 70C-5T25DG	5.00	70.0	95.0	25.00	11.9	32.0	66.00
HFAIR/L 95C-5T35DG	5.00	95.0	130.0	35.00	11.9	39.5	73.50
HFAIR/L 130C-5T38DG	5.00	130.0	180.0	38.00	11.9	42.5	76.50
HFAIR/L 180C-5T38DG	5.00	180.0	-	38.00	11.9	42.5	76.50
HFAIR/L 70C-6T28DG	6.00	70.0	100.0	28.00	12.0	35.0	69.00
HFAIR/L 100C-6T32DG	6.00	100.0	180.0	32.00	12.0	39.0	73.00
HFAIR/L 180C-6T38DG	6.00	180.0	-	38.00	12.4	42.5	76.50

• After initial groove, no limitation to widening groove outward or toward center

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • DGN-W (49) • HGPL (50).

For holders, see pages: C#-HAD (33) • C#-HAPR/L (32) • HAI-C (39) • HAPR/L (31) • HAR/L (31) • IM-HAD (33) • IM-HAPR/L (32).

Spare Parts



Designation	Extractor
HFAIR/L-DG	EDG 33B*


* Optional, should be ordered separately




Adapters can be used for internal machining along bore.
Adapters can be mounted on standard HAI boring bars for internal machining and on HAR/L, HAPR/L holders for external machining

Boring, Face Grooving & Face Recessing Capacity


Boring
B Min. = F+G+d/2



Face Grooving
D Min. = 2F-B+2G+d




Face Recessing
P Min. = 2F-B-2W+2G+d



⁽¹⁾ The minimum recommended value for clearance (G) is 0.5 mm.

HFIR/L-MC

Boring Bars for Internal Grooving and Turning

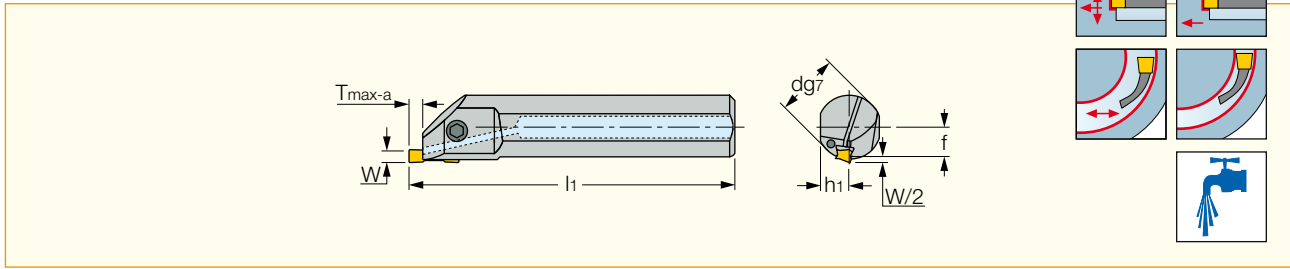

Designation	W _{min}	W _{max}	d	l ₁	f _{±0.10}	h ₁	T _{max-a}
HFIR/L 25MC	3.00	6.00	25.00	200.00	11.14	11.5	5.00
HFIR/L 32MC	3.00	6.00	32.00	250.00	14.68	14.5	5.00
HFIR/L 40MC	3.00	6.00	40.00	300.00	18.70	18.0	5.00

- DGN & GRIP 4.. - 6.. inserts can be used only with right-hand tools, HGPL 4.. - 6.. inserts with left-hand tools.
- After initial groove, no limitation to widening groove outward or toward center. • For user guide, see pages 98-114.


For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • DGN-W (49) • HGPL (50).

Spare Parts




Designation	Key	Screw	Seal
HFIR/L 25MC	HW 4.0	SR M5X16DIN912 12.9	PL 25
HFIR/L 32MC	HW 5.0	SR M6X20DIN912 12.9	PL 32
HFIR/L 40MC	HW 5.0	SR M6X20DIN912 12.9	PL 40


Boring



Internal Face Grooving



Internal Face Recessing



HFIR/L-: MC Integral Boring Bars

For shallow, internal face machining to max. 5 mm depth of groove. One boring bar can be mounted with inserts in 3-6 mm widths.



The initial major diameter groove is limited by the insert geometry in each size.

After initial groove, face recessing outward or toward center is not limited by insert geometry.

Boring, Face Grooving and Face Recessing Capacity



Boring

$$B \text{ Min.} = F + d/2 + W/2 + 2G$$





Face Grooving

$$D \text{ Min.} = 2F + d + W - B + 2G$$



Face Recessing

$$P \text{ Min.} = 2F + d - W - B + 2G$$




⁽¹⁾ The minimum recommended value for clearance (G) is 0.5 mm.

EXCHANGEABLEHEADS • CAMFIX

C#-HFIR/L-MC

Boring Bars for Internal Grooving and Turning with CAMFIX (ISO 26623-1 standard)
Exchangeable, Tapered Shanks

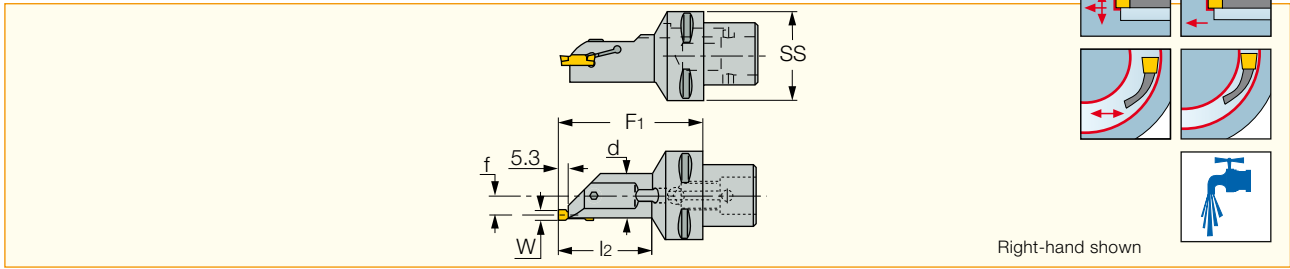

Designation	W _{min}	W _{max}	SS	f	l ₂	F ₁	d
C4 HFIR/L-MC	3.00	6.00	40	11.3	52.0	80.0	25.00
C5 HFIR/L-MC	3.00	6.00	50	11.3	52.0	80.0	25.00

- DGN & GRIP 4.. - 6.. inserts can be used only with right-hand tools, HGPL 4.. - 6.. inserts with left-hand tools.
 - After initial groove, no limitation to widening groove outward or toward center. • For user guide, see pages 98-114.
- For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48)
• DGN/DGNM-J/JS/JT (49) • DGN-W (49) • HGPL (60).




Designation	Screw	Key	Cooling Nozzle
C#-HFIR/L-MC	SR M5X16DIN912 12.9	HW 4.0	EZ 83

HELIFACE • EXCHANGEABLEHEADS

IM-HFIR/L-MC

Tools for Internal Grooving and Turning with ISO 26622-1(*) Tapered Shank

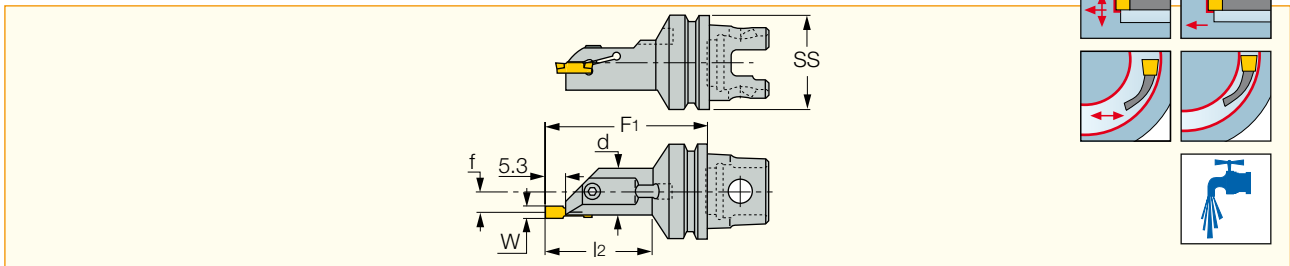

Designation	SS	F ₁	d	f	l ₂	W _{min}	W _{max}
IM40 HFIR-MC	40	80.0	25.00	11.3	52.0	3.00	6.00
IM50 HFIR-MC	50	80.0	25.00	11.3	52.0	3.00	6.00

- (*) Tools with orientation holes in the flange groove can be supplied on request
 - DGN & GRIP 4.. - 6.. inserts can be used only with right-hand tools, HGPL 4.. - 6.. inserts with left-hand tools.
 - After initial groove, no limitation to widening groove outward or toward center. • For user guide, see pages 98-114.
- For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48)
• DGN/DGNM-J/JS/JT (49) • DGN-W (49).




Spare Parts

Designation	Cooling Nozzle	Key	Screw
IM-HFIR/L-MC	EZ 83	HW 4.0	SR M5X16DIN912 12.9

CR HFIR/L-M

Cartridges for Face Grooving and Turning

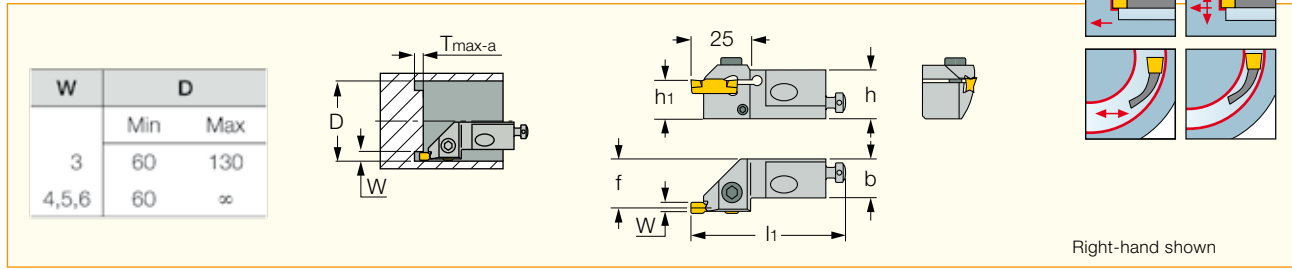


Designation	W _{min}	W _{max}	h ₁	b	h	l ₁	f	T _{max-a}
CR HFIR-16M	3.00	6.00	16.0	16.0	20.0	67.00	20.0	5.00
CR HFIR-20M	3.00	6.00	20.0	20.0	24.0	72.00	24.0	5.00

- Used for shallow internal face machining to max. 5 mm depth of groove
- Inserts in 3-6 mm widths can be mounted on the cartridges
- Only DGN & GRIP 4.. - 6.. inserts can be used with the right-hand tools

For inserts, see pages: HFPR/L (44) • HFPR/L (full radius) (44) • GRIP (45) • GRIP (full radius) (46) • DGN/DGNC/DGNM-C (48) • DGN/DGNM-J/JS/JT (49) • DGN-W (49).

CR-HFIR/L-M

Assembly Dimensions

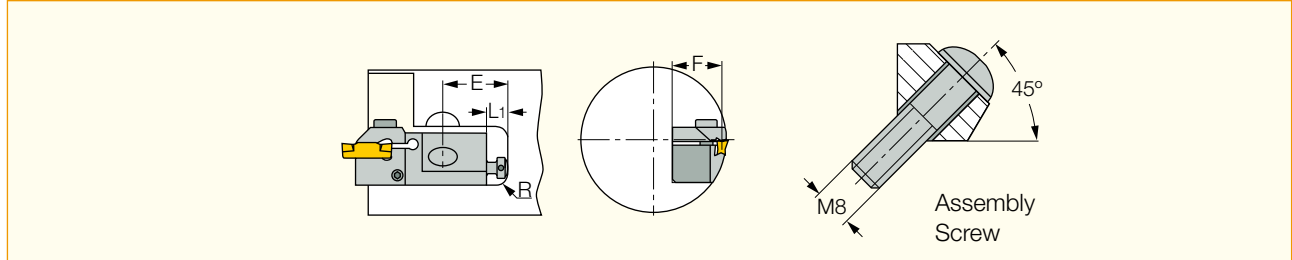

Designation	E	L ₁ ⁽¹⁾	F ⁽²⁾	R _{max.}	Assembly Screw ⁽³⁾
CR HFIR/L-16M	25	8	20	6	M8X30
CR HFIR/L-20M	30	10	24	6	M8X30

⁽¹⁾ L adjustment ± 1.

⁽²⁾ F adjustment +0.3
- 0


⁽³⁾ Assembly screws ISO 7380 are recommended.

Spare Parts

Designation	Upper Locking Screw	Key	Rear Adjustment Screw	Side Adjustment Screw	Hex Key
CR HFIR-16M	SR M5X20DIN912 12.9	HW 4.0	SR 76-1401	SR M4X10DIN916	HW 2.0
CR HFIR-20M	SR M5X20DIN912 12.9	HW 4.0	SR 76-1401	SR M4X10DIN913	HW 2.0

HFPR/L

Utility Double-Ended Face Machining Inserts

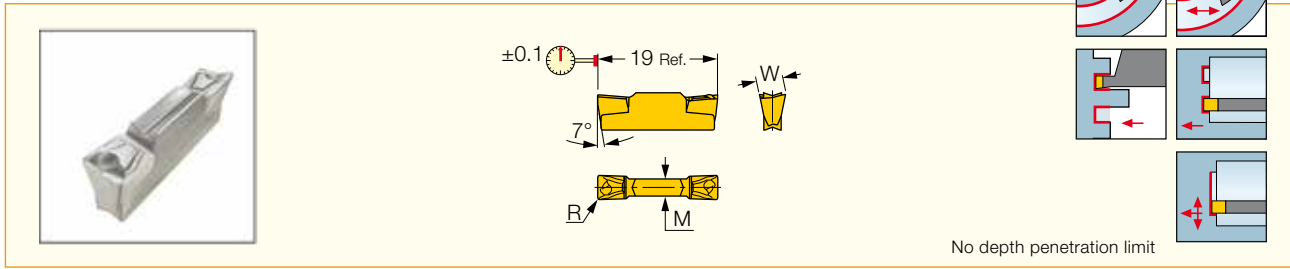

No depth penetration limit


Designation	Dimensions					Tough ↔ Hard									Recommended Machining Data			
	W±0.05	R±0.05	M	D _{1 min}	D _{1 max}	IC328	IC830	IC354	IC8250	IC808	IC9015	IC9054	IC20	IC428	IC5010	a _p (mm)	f face-groove (mm/rev)	f face-turn (mm/rev)
HFPR/L 3003	3.00	0.30	2.1	25.6	51.5	●	●	●	●	●	●	●	●	●	●	0.30-1.50	0.08-0.20	0.10-0.20
HFPR/L 4004	4.00	0.40	2.8	24.1	73.7	●	●	●	●	●	●	●	●	●	●	0.40-2.00	0.10-0.24	0.15-0.25
HFPR/L 5004	5.00	0.40	3.4	21.0	170.0	●	●	●	●	●	●	●	●	●	●	0.50-2.50	0.12-0.24	0.15-0.35
HFPR/L 6004	6.00	0.40	4.0	20.8	-	●	●	●	●	●	●	●	●	●	●	0.40-3.00	0.12-0.28	0.15-0.40

• For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: C#-HFIR/L-MC (42) • CR HFIR/L-M (43) • HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HFFR/L-T (29) • HFHPR/L-M (35) • HFHR/L-3T (23) • HFHR/L-4T (24) • HFHR/L-5T (25) • HFHR/L-6T (26) • HFHR/L-M (34) • HFIR/L-MC (41) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28) • IM-HFIR/L-MC (42).

HFPR/L (full radius)

Utility Double-Ended Full Radius Face Machining Inserts

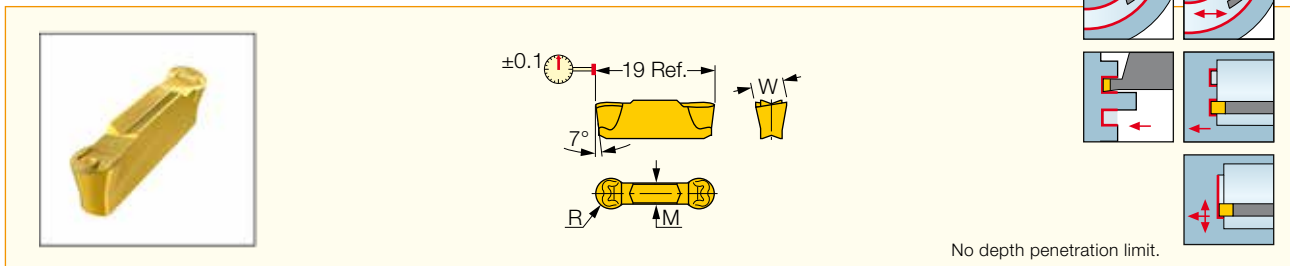


No depth penetration limit.

Designation	Dimensions					Tough ↔ Hard									Recommended Machining Data		
	W±0.05	R±0.05	M	D _{1 min}	D _{1 max}	IC830	IC354	IC8250	IC808	IC9015	IC9054	IC20	IC428	IC5010	a _p (mm)	f face-groove (mm/rev)	f face-turn (mm/rev)
HFPR/L 3015	3.00	1.50	2.1	25.6	51.5	●	●	●	●	●	●	●	●	●	0.00-1.50	0.08-0.20	0.12-0.20
HFPR/L 4020	4.00	2.00	2.8	24.1	73.7	●	●	●	●	●	●	●	●	●	0.00-2.00	0.10-0.24	0.15-0.25
HFPR/L 5025	5.00	2.50	3.4	22.1	170.0	●	●	●	●	●	●	●	●	●	0.00-2.50	0.12-0.24	0.15-0.35
HFPR/L 6030	6.00	3.00	4.0	20.8	-	●	●	●	●	●	●	●	●	●	0.00-3.00	0.12-0.28	0.20-0.40

• For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: C#-HFIR/L-MC (42) • CR HFIR/L-M (43) • HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HFFR/L-T (29) • HFHPR/L-M (35) • HFHR/L-3T (23) • HFHR/L-4T (24) • HFHR/L-5T (25) • HFHR/L-6T (26) • HFHR/L-M (34) • HFIR/L-MC (41) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28) • IM-HFIR/L-MC (42).

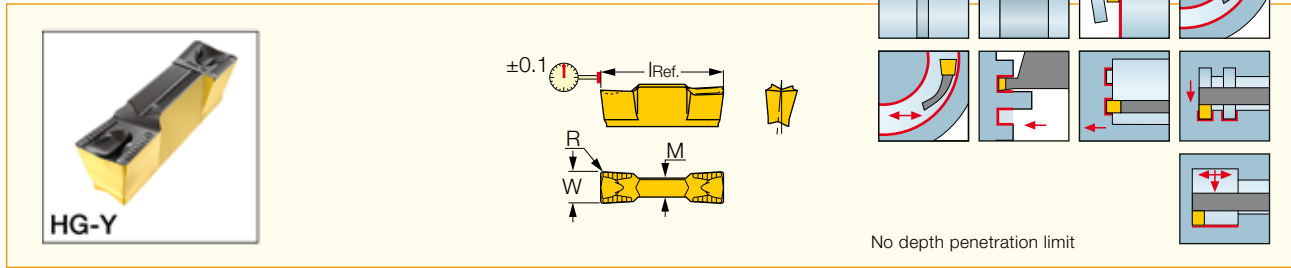

No depth penetration limit

Designation	Dimensions				Tough ↔ Hard						Recommended Machining Data					
	W±0.05	R±0.05	I	M	IC830	IC8250	IC808	IC908	IC418	IC807	IC5010	ap (mm)	f turn (mm/rev)	f groove (mm/rev)	f face-groove (mm/rev)	f face-turn (mm/rev)
GRIP 3002Y	3.00	0.20	16.00	2.3	●	●	●	●	●	●	●	0.25-1.80	0.14-0.18	0.07-0.11	0.08-0.20	0.10-0.20
GRIP 3003Y	3.00	0.30	16.00	2.3	●	●	●	●	●	●	●	0.40-1.80	0.15-0.19	0.07-0.11	0.08-0.20	0.10-0.20
GRIP 318-040Y	3.18	0.40	16.00	2.3	●	●	●	●	●	●	●	0.50-1.90	0.17-0.22	0.07-0.12	0.08-0.20	0.10-0.20
GRIP 4002Y	4.00	0.20	19.00	2.8	●	●	●	●	●	●	●	0.25-2.40	0.16-0.21	0.09-0.14	0.10-0.24	0.15-0.30
GRIP 4004Y	4.00	0.40	19.00	2.8	●	●	●	●	●	●	●	0.50-2.40	0.18-0.24	0.09-0.15	0.10-0.24	0.15-0.30
GRIP 476-080Y	4.76	0.80	19.00	3.1	●	●	●	●	●	●	●	1.00-2.80	0.21-0.33	0.10-0.20	0.10-0.24	0.15-0.30
GRIP 5005Y	5.00	0.50	19.00	3.3	●	●	●	●	●	●	●	0.60-3.00	0.20-0.30	0.11-0.20	0.12-0.24	0.15-0.35
GRIP 5008Y	5.00	0.80	19.00	3.4	●	●	●	●	●	●	●	1.00-3.00	0.23-0.35	0.11-0.21	0.12-0.24	0.15-0.35
GRIP 6005Y	6.00	0.50	19.00	4.2	●	●	●	●	●	●	●	0.60-3.60	0.22-0.36	0.13-0.23	0.12-0.28	0.15-0.40
GRIP 6008Y	6.00	0.80	19.00	4.2	●	●	●	●	●	●	●	1.00-3.60	0.24-0.42	0.13-0.25	0.12-0.28	0.15-0.40
GRIP 635-080Y	6.35	0.80	19.00	4.2	●	●	●	●	●	●	●	1.00-3.80	0.25-0.44	0.14-0.27	0.12-0.28	0.15-0.40

• For cutting speed recommendations and user guide, see pages 98-114.


For tools, see pages: C#-HFIR/L-MC (42) • CR HFIR/L-M (43) • HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HFFR/L-T (29) • HFHR/L-4T (24) • HFHR/L-5T (25) • HFIR/L-MC (41) • HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28) • HGAER/L-3 (29) • HGAIR/L-3 (38) • HGHR/L-3 (22) • IM-HFIR/L-MC (42).

The Twisted Insert for Face Machining

The double-ended, twisted insert body makes it possible to machine to depths much larger than insert length. Unique chipformer for controlled chip flow in axial and radial directions. The rear angle is slanted in relation to the frontal edge so it does not come into contact with the machined groove surface, as tool penetrates deeply into the workpiece.

GRIP (full radius)


Utility Double-Ended Full Radius Inserts, for External, Internal and Face Machining

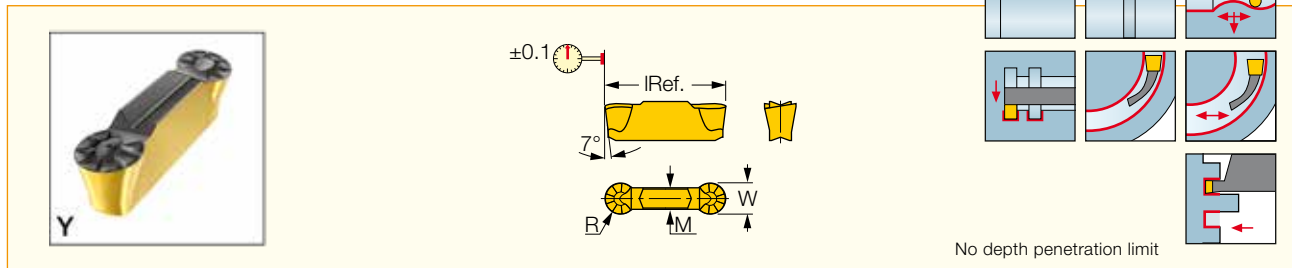

Designation	Dimensions				Tough ↔ Hard								Recommended Machining Data				
	W±0.05	R±0.05	I	M	IC830	IC8250	IC808	IC908	IC418	IC807	IC5010	ap (mm)	f turn (mm/rev)	f groove (mm/rev)	f face-groove (mm/rev)	f face-turn (mm/rev)	
GRIP 3015Y	3.00	1.50	16.00	2.1	●	●	●	●	●	●	●	0.00-1.50	0.18-0.26	0.07-0.13	0.08-0.20	0.10-0.20	
GRIP 318-159Y	3.18	1.59	16.00	2.3	●	●	●	●	●	●	●	0.00-1.50	0.19-0.28	0.07-0.13	0.08-0.20	0.10-0.20	
GRIP 4020Y	4.00	2.00	19.00	2.8	●	●	●	●	●	●	●	0.00-2.00	0.20-0.34	0.09-0.17	0.10-0.24	0.15-0.30	
GRIP 476-238Y	4.76	2.38	19.00	3.2	●	●	●	●	●	●	●	0.00-2.30	0.21-0.40	0.10-0.20	0.10-0.24	0.15-0.30	
GRIP 5025Y	5.00	2.50	19.00	3.4	●	●	●	●	●	●	●	0.00-2.50	0.23-0.42	0.11-0.21	0.12-0.24	0.15-0.35	
GRIP 6030Y	6.00	3.00	19.00	4.2	●	●	●	●	●	●	●	0.00-3.00	0.24-0.50	0.13-0.25	0.12-0.28	0.15-0.40	
GRIP 635-318Y	6.35	3.18	19.00	4.0	●	●	●	●	●	●	●	0.00-3.10	0.25-0.53	0.14-0.27	0.12-0.28	0.15-0.40	


• For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: C#-HFIR/L-MC (42) • CR HFIR/L-M (43) • HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HFFR/L-T (29) • HFHR/L-4T (24) • HFHR/L-5T (25) • HFIR/L-MC (41) • HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28) • HGAER/L-3 (29) • HGAIIR/L-3 (38) • HGHR/L-3 (22) • IM-HFIR/L-MC (42).

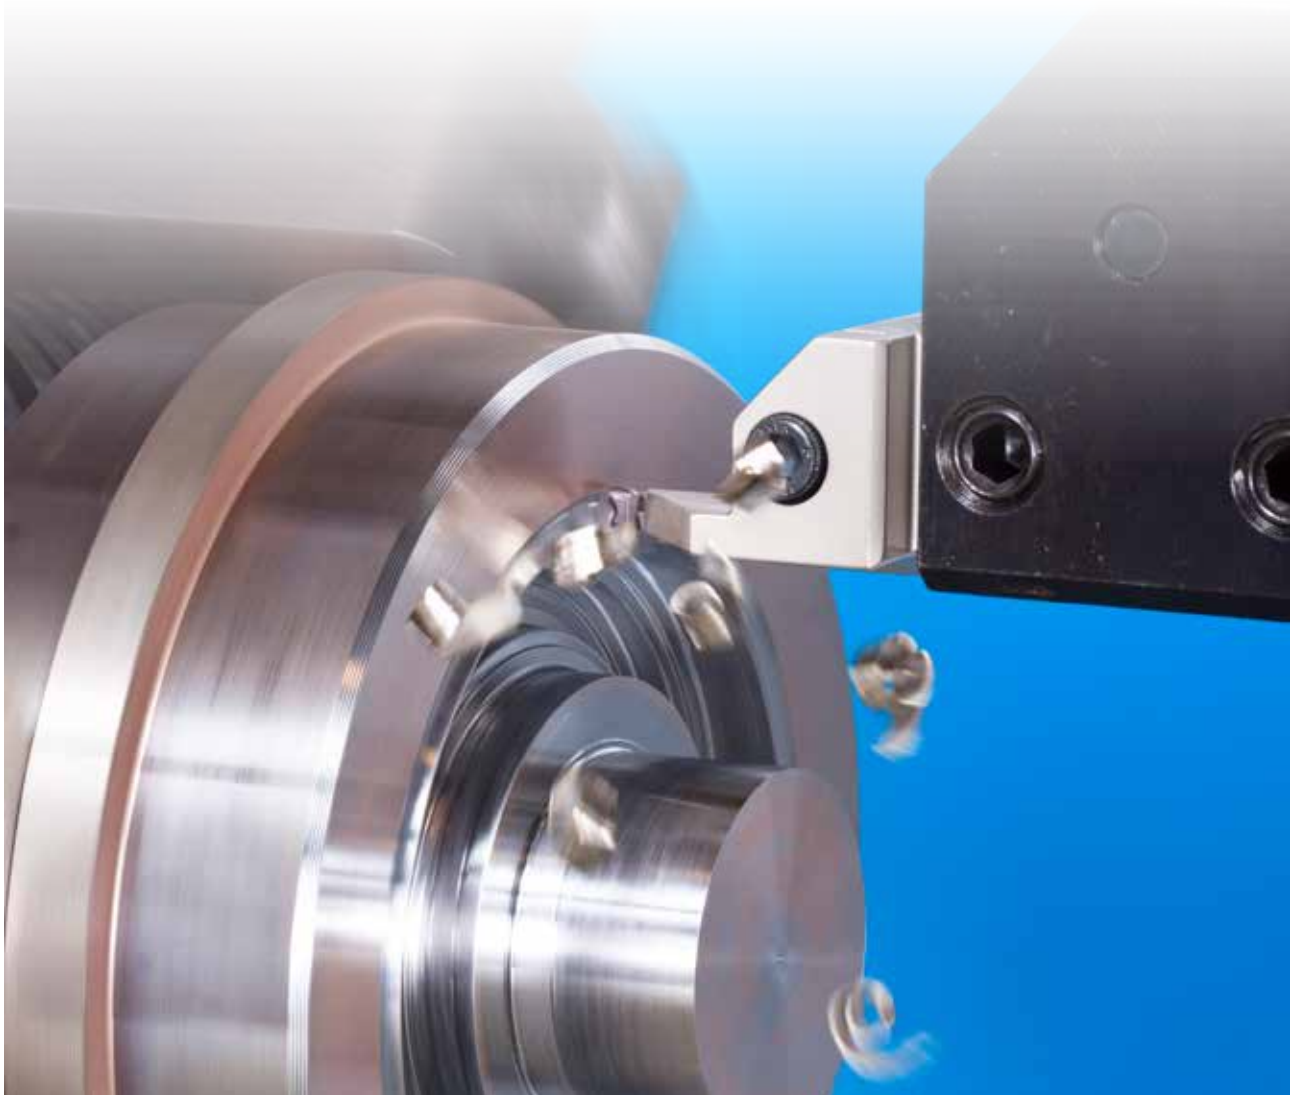

HGN-C

Parting and Grooving Insert, for Parting Bars, Hard Materials and Tough Applications

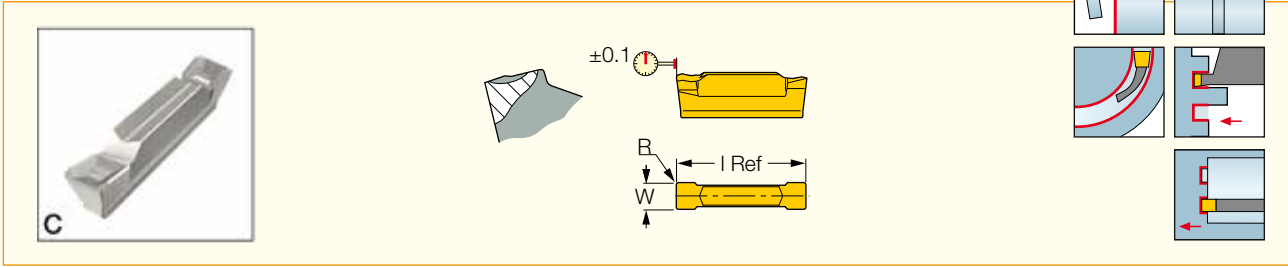


Designation	Dimensions			Tough ↔ Hard					Recommended Machining Data
	W ± 0.05	R	I	IC328	IC830	IC354	IC308	IC908	f groove (mm/rev)
HGN 3003C	3.00	0.30	15.80	●	●	●	●	●	0.08-0.20

• No depth limit • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: HFPAD-3 (27) • HGAIR/L-3 (38) • HGHR/L-3 (22).

HGN-J

Parting and Grooving Insert for Soft Materials, Parting of Tubes, Small Diameters and Thin-Walled Parts

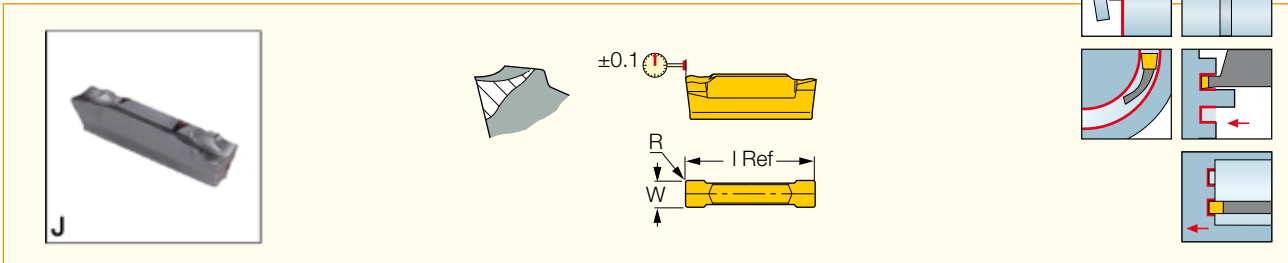


Designation	Dimensions			Tough ↔ Hard				Recommended Machining Data
	W ± 0.05	R	I	IC328	IC830	IC354	IC308	f groove (mm/rev)
HGN 3002J	3.00	0.20	16.10	●	●	●	●	0.04-0.15

• No depth limit • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: HFPAD-3 (27) • HGAIR/L-3 (38) • HGHR/L-3 (22).

HGN-UT

Parting and Grooving Double-Sided Insert, for Low Feeds on Cr-Ni Alloys and Low Carbon Steel

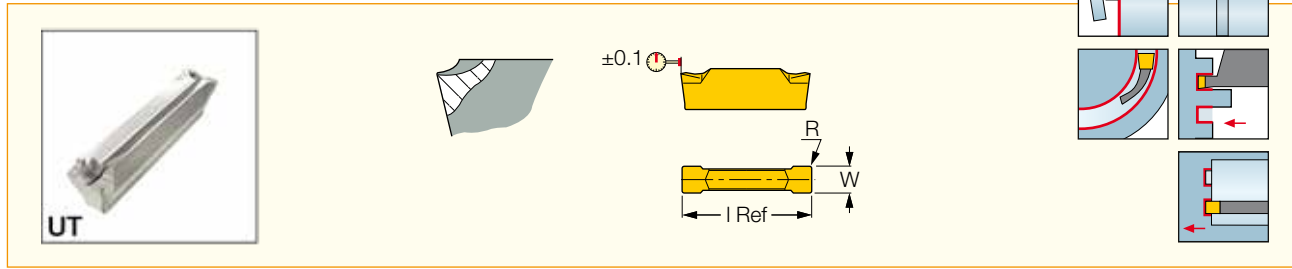


Designation	Dimensions			Tough ↔ Hard		Recommended Machining Data
	W ± 0.05	R	I	IC328	IC354	
HGN 3003UT	3.00	0.30	15.80	●	●	f groove (mm/rev) 0.04-0.13

• No depth limit • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: HFPAD-3 (27) • HGAIR/L-3 (38) • HGHR/L-3 (22).

DGN/DGNC/DGNM-C

Double-Sided Parting Insert, for Parting and Grooving of Bars, Hard Materials and Tough Applications

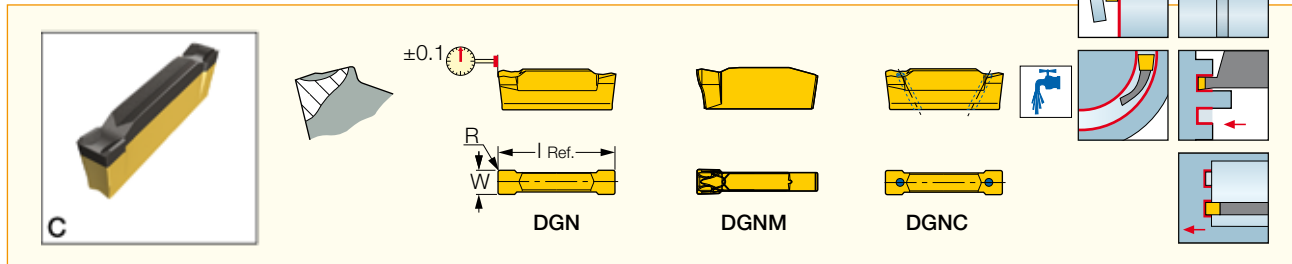

Designation	Dimensions					Tough ↔ Hard										Recommended Machining Data		
	W	W ± 0.04	R	T $_{max-r}$	I Ref.	IC328	IC830	IC1028	IC354	IC5400	IC308	IC808	IC908	IC30N	IC807		IC907	IC20
DGN 4003C	4.00	0.04	0.30	- (2)	18.8	●	●	●	●		●			●	●		●	0.10-0.30
DGNC 4003C (1)	4.00	0.04	0.30	- (2)	19.0							●	●					0.10-0.30
DGN 4803C	4.80	0.04	0.30	- (2)	19.9	●						●	●				●	0.12-0.35
DGN 5003C	5.00	0.04	0.30	- (2)	19.1	●	●	●	●			●	●	●			●	0.12-0.35
DGN 6303C	6.35	0.04	0.35	- (2)	19.1	●	●	●	●			●	●				●	0.15-0.40


• DGN & GRIP inserts can be used only with right-hand adapters • Feed values for grade IC20 should be decreased by 50%
• For cutting speed recommendations and user guide, see pages 98-114.

(1) Inserts with coolant holes, recommended coolant pressure 10 bar minimum (2) No depth limit

For tools, see pages: C#-HFIR/L-MC (42) • CR HFIR/L-M (43) • HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HFFR/L-T (29)
• HFHR/L-4T (24) • HFHR/L-5T (25) • HFHR/L-6T (26) • HFIR/L-MC (41) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28) • IM-HFIR/L-MC (42).

DGN-W

Parting and Grooving Double-Sided Insert. Central Ridged Chipformer used on Hard Materials and Interrupted Cuts

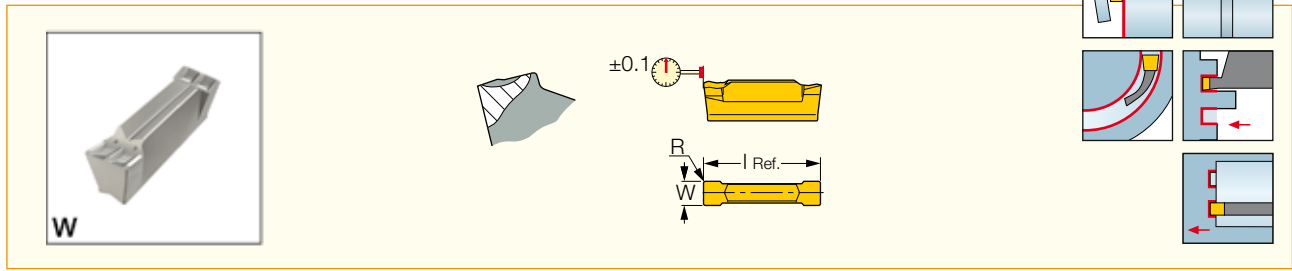


Designation	Dimensions			Tough ↔ Hard		Recommended Machining Data
	W±0.04	R	l Ref.	IC328	IC354	
DGN 5003W	5.00	0.30	19.0	●	●	f groove (mm/rev) 0.12-0.33

- No depth limit • For cutting speed recommendations and user guide, see pages 98-114.
- For tools, see pages: C#-HFIR/L-MC (42) • CR HFIR/L-M (43) • HFAER/L-5T, 6T (30) • HFAIR/L-DG (40)
- HFFR/L-T (29) • HFHR/L-5T (25) • HFIR/L-MC (41) • HFPAD-5 (28) • IM-HFIR/L-MC (42).

DGN/DGNM-J/JS/JT

Double-Sided Parting and Grooving Insert for Soft Materials, Parting of Tubes, Small Diameters and Thin-Walled Parts

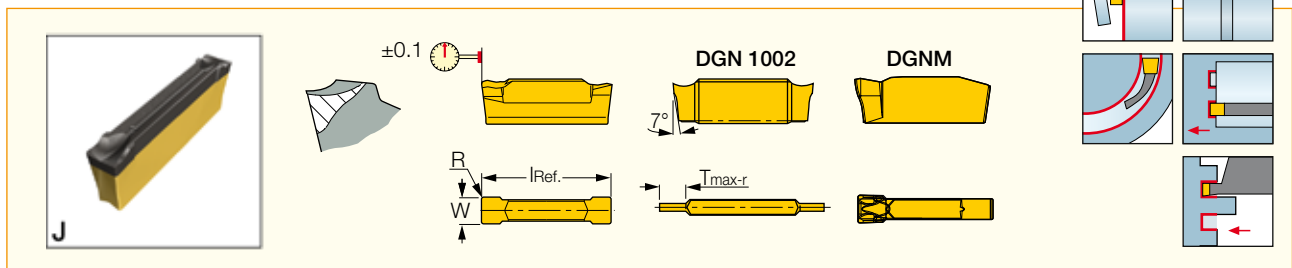

Designation	Dimensions					Tough ↔ Hard										Recommended Machining Data	
	W	W _{stoler}	R	T _{max-r}	l Ref.	IC328	IC830	IC1028	IC354	IC5400	IC308	IC808	IC908	IC807	IC907		IC20
DGN 4003J	4.00	0.04	0.30	- ⁽¹⁾	18.9	●	●	●	●		●	●	●	●		●	f groove (mm/rev) 0.05-0.18
DGN 4003JT	4.00	0.04	0.30	- ⁽¹⁾	18.9		●				●	●	●	●		●	0.05-0.18
DGN 4803J	4.80	0.04	0.30	- ⁽¹⁾	20.4	●					●	●	●	●		●	0.05-0.20
DGN 5003J	5.00	0.04	0.30	- ⁽¹⁾	19.0	●	●	●	●		●	●	●	●		●	0.05-0.20
DGN 6303J	6.35	0.04	0.35	- ⁽¹⁾	19.1	●	●	●	●		●	●	●	●		●	0.05-0.25


- DGN & GRIP inserts can be used only with right-hand adapters • JT chipformer has the basic positive configuration of the J-type and a reinforced negative frontal edge. Most suitable for soft materials at low to medium feeds. • For cutting speed recommendations and user guide, see pages 98-114.

⁽¹⁾ No depth limit

- For tools, see pages: C#-HFIR/L-MC (42) • CR HFIR/L-M (43) • HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38)
- HFAIR/L-DG (40) • HFFR/L-T (29) • HFHR/L-4T (24) • HFHR/L-5T (25) • HFHR/L-6T (26) • HFIR/L-MC (41) • HFPAD-4 (27)
- HFPAD-5 (28) • HFPAD-6 (28) • IM-HFIR/L-MC (42).

HGPL

Utility Double-Ended Face Machining Insert

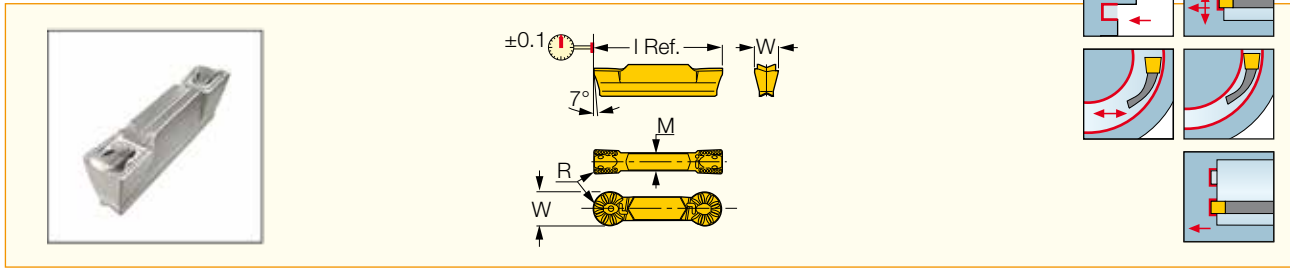

Designation	Dimensions				Tough ↔ Hard					Recommended Machining Data		
	W ± 0.03	M	R ± 0.05	I	IC328	IC354	IC08	IC808	IC908	a _p (mm)	f face-groove (mm/rev)	f face-turn (mm/rev)
HGPL 3015Y	3.00	2.1	1.50	16.00			●	●	●	0.00-1.50	0.08-0.20	0.12-0.23
HGPL 3002Y	3.00	2.3	0.20	16.00		●	●	●	●	0.24-1.80	0.08-0.20	0.12-0.23
HGPL 3003Y	3.00	2.3	0.30	16.00	●	●	●	●	●	0.36-1.80	0.08-0.20	0.12-0.23
HGPL 4002Y	4.00	2.8	0.20	19.00		●	●	●	●	0.24-2.40	0.10-0.24	0.16-0.30
HGPL 4004Y	4.00	2.8	0.40	19.00		●	●	●	●	0.48-2.40	0.10-0.24	0.16-0.30
HGPL 4020Y	4.00	2.8	2.00	19.00			●	●	●	0.00-2.00	0.10-0.24	0.16-0.30
HGPL 5005Y	5.00	3.3	0.50	19.00		●		●	●	0.60-3.00	0.12-0.24	0.20-0.38
HGPL 5025Y	5.00	3.3	2.50	19.00			●	●	●	0.00-2.50	0.12-0.24	0.20-0.38
HGPL 6005Y	6.00	4.2	0.50	19.00		●	●	●	●	0.60-3.60	0.12-0.28	0.24-0.45
HGPL 6030Y	6.00	4.2	3.00	19.00			●	●	●	0.00-3.00	0.12-0.28	0.24-0.45

• No depth penetration limit • For cutting speed recommendations and user guide, see pages 98-114.


For tools, see pages: C#-HFIR/L-MC (42) • HFAER/L-4T (30) • HFAER/L-5T, 6T (30) • HFAIR/L-4 (38) • HFAIR/L-DG (40) • HFFR/L-T (29) • HFHR/L-4T (24) • HFHR/L-5T (25) • HFHR/L-6T (26) • HFIR/L-MC (41) • HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28) • HGAER/L-3 (29) • HGAIIR/L-3 (38) • HGHR/L-3 (22).



MODULAR-GRIP

MAHR/L

Holders for Adapters of all GRIP Systems

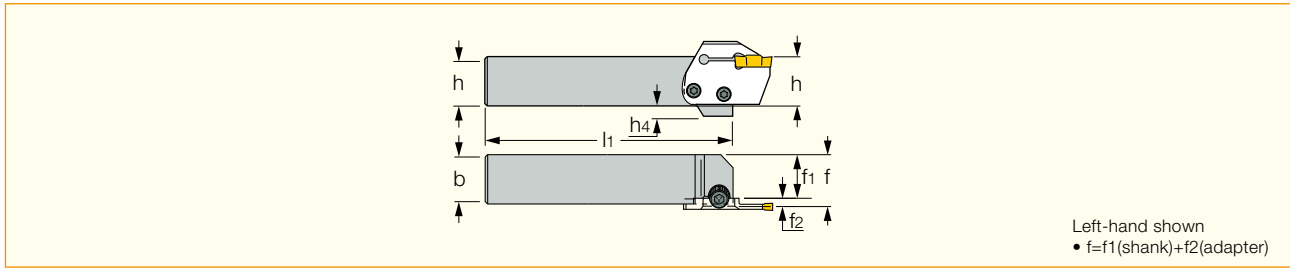

Designation	h	b	l ₁	h ₄	f ₁
MAHR/L 20	20.0	20.0	130.00	10.0	17.1
MAHR/L 25	25.0	25.0	130.00	5.0	22.1
MAHR/L 32	32.0	32.0	140.00	-	29.1

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts




Designation	Lower Locking Screw	Key	Screw	Upper Locking Screw	Key 1	Screw 1
MAHR/L	SR M5-04451	T-20/5	SR 14-519	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

MAHPR/L

Holders for all GRIP Systems, Perpendicularly Mounted Adapters

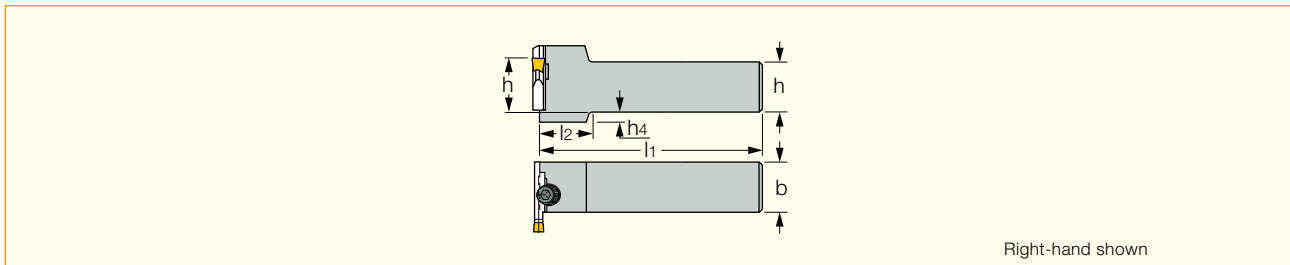

Designation	h	b	l ₁	l ₂	h ₄
MAHPR/L 20	20.0	20.0	140.00	25.0	10.0
MAHPR/L 25	25.0	25.0	140.00	25.0	5.0
MAHPR/L 32	32.0	32.0	150.00	25.0	-

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts




Designation	Lower Locking Screw	Key	Screw	Upper Locking Screw	Key 1	Screw 1
MAHPR/L	SR M5-04451	T-20/5	SR 14-519	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

MODULAR-GRIP • CAMFIX

C#-MAHDR-45

Holders for Parting, Grooving, Turning and Facing Adapters with CAMFIX (ISO 26623-1 standard) Exchangeable Shanks

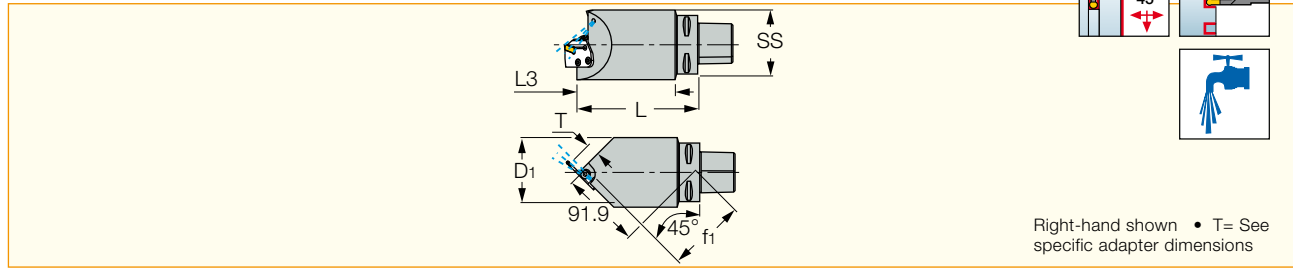

Designation	SS	L	L ₁	f ₁	D ₁	L ₃
C6 MAHDR-45	63	130.00	91.9	89.0	75.0	105.78
C8 MAHDR-45	80	130.00	91.9	89.0	80.0	-

• For mill-turn machines.

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts

Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Cooling Nozzle
C6 MAHDR-45	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20DIN7984	HW 4.0	SR M6X6DIN551 ⁽³⁾	EZ 83
C8 MAHDR-45	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	EZ 83

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole.





HELIFACE

MODULAR-GRIP • CAMFIX

C#-MAHUR/L

Holders for Parting, Grooving, Turning and Facing Adapters with CAMFIX Shanks, 10° Mounting on Mill-Turn Machines

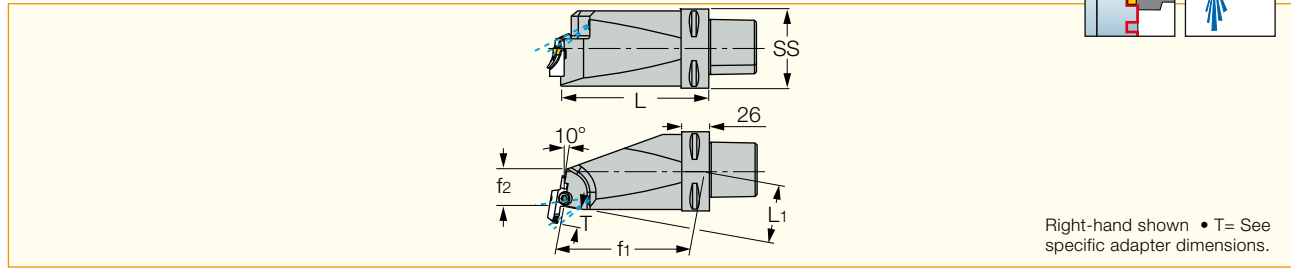

Right-hand shown • T= See specific adapter dimensions.

Designation	SS	f ₁	f ₂	L	L ₁
C6 MAHUR/L-10	63	113.1	29.00	123.00	49.4
C8 MAHUR-10	80	113.1	29.00	123.00	49.4

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Cooling Nozzle
C#-MAHUR/L	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	EZ 125


⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole.

C#-MAHD

Holders for Parting, Grooving, Turning and Facing Adapters with CAMFIX Exchangeable Shanks

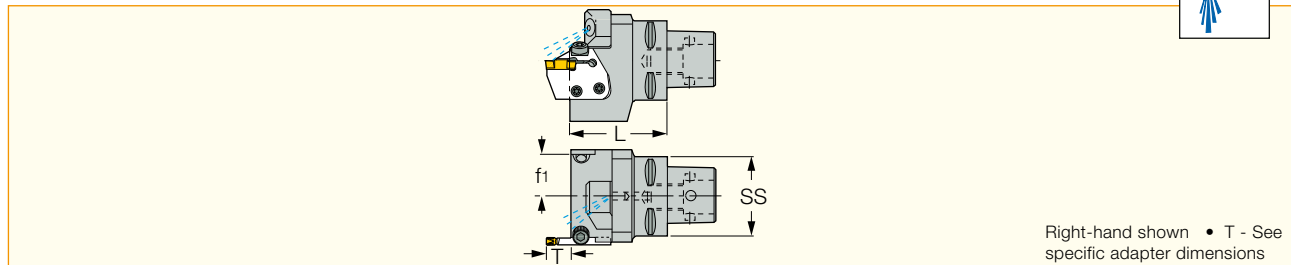

Right-hand shown • T - See specific adapter dimensions

Designation	SS	L	f ₁
C4 MAHD	40	46.50	22.1
C5 MAHD	50	47.00	23.0
C6 MAHD	63	50.00	29.0
C8 MAHD	80	60.00	37.5

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Cooling Nozzle	Nozzle	Nozzle Screw
C#-MAHD	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	EZ 125	EZA 125	SR 76-1022

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.


⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole.

MODULAR-GRIP • CAMFIX

C#-MAHPD

Perpendicular Holders for Parting, Grooving, Turning and Facing Adapters with CAMFIX Exchangeable Shanks

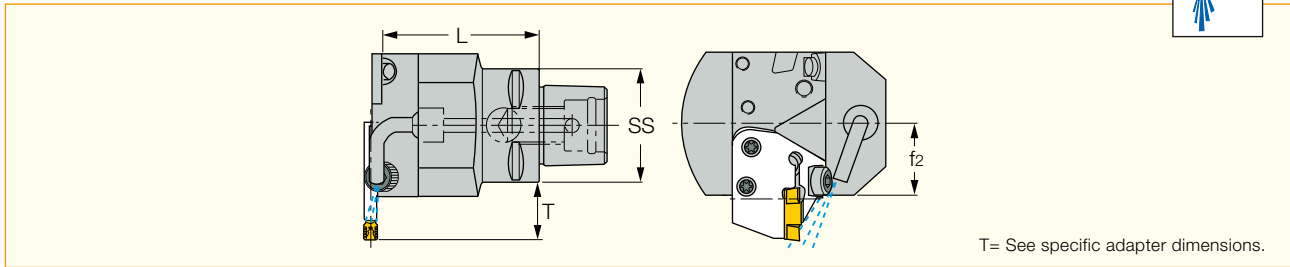

T= See specific adapter dimensions.

Designation	SS	L	f ₂
C4 MAHPD	40	46.00	25.00
C5 MAHPD	50	46.00	26.00
C6 MAHPD	63	47.00	33.00

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Cooling Nozzle	Screw	Nozzle Body
C#-MAHPD	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	EZ 125	SR 76-1022	EZA-21414

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole when it is not used for the adaptation. Supplied in the attached plastic bag.




CAMFIX

EXCHANGEABLEHEADS • MODULAR-GRIP

HSK A-WH-MAHDR/L-45

Holders for MODULAR-GRIP, Parting, Grooving and Facing Adapters with HSK Tapered Shanks

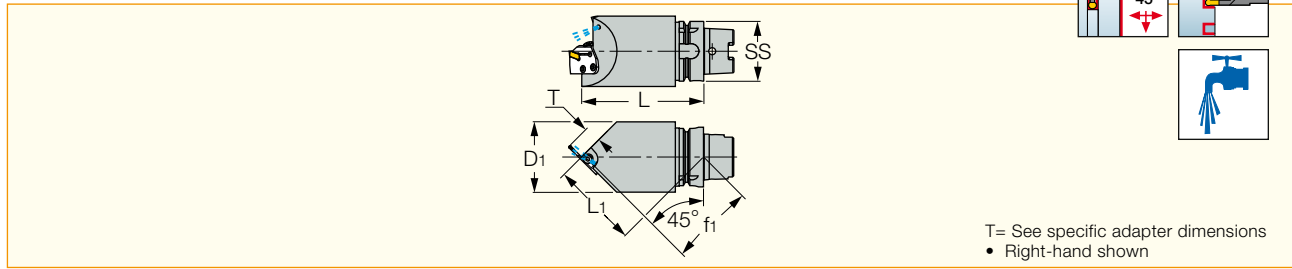

Designation	SS	L	L ₁	f ₁	D ₁
HSK A63WH-MAHDR-45	63	130.00	91.9	89.0	75.0
HSK A100WH-MAHDL-45	100	140.00	99.0	97.6	100.0

• A cooling tube must be used with all coolant through HSK spindles (should be ordered separately) • Complies with the ICTM and HSK-T standards

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Screw	Key 2	Sealing Screw	Cooling Nozzle
HSK A63WH-MAHDR-45	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT	HW 5.0	SR M6X6DIN551 ⁽³⁾	SATZ-M8X1-M3
HSK A100WH-MAHDL-45	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	SATZ-M8X1-M3

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole when it is not used for the adaptation. Supplied in the attached plastic bag.





HELIFACE

EXCHANGEABLEHEADS • MODULAR-GRIP

HSK A63WH-MAHDOR

Holders for Parting, Grooving, Turning and Facing Adapters with HSK Exchangeable Shanks

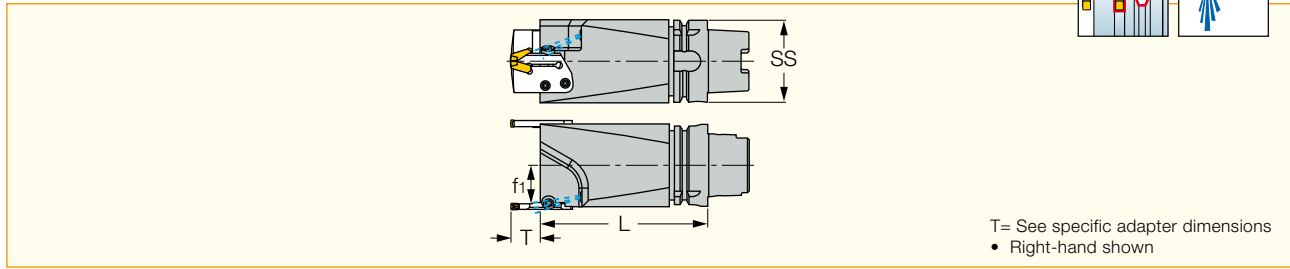

T= See specific adapter dimensions
• Right-hand shown

Designation	SS	f ₁	L
HSK A63WH-MAHDOR	63	29.0	130.00

• A cooling tube must be used with all coolant through HSK spindles (should be ordered separately). • Complies with the ICTM and HSK-T standards.

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Cooling Nozzle
HSK A63WH-MAHDOR	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	EZ 125



⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole when it is not used for the adaptation. Supplied in the attached plastic bag.

HSK A63WH-MAHUR/L

Holders for Parting, Grooving, Turning and Facing Adapters with HSK-T Shanks, 10° Mounting on Mill-Turn Machines

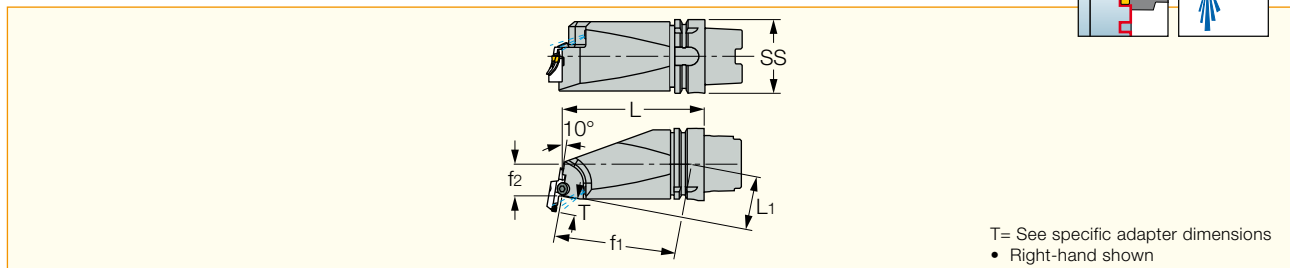

T= See specific adapter dimensions
• Right-hand shown

Designation	SS	f ₁	f ₂	L	L ₁
HSK A63WH-MAHUR/L-10	63	113.1	29.00	130.00	49.4

• A cooling tube must be used with all coolant through HSK spindles (should be ordered separately) • Complies with the ICTM and HSK-T standards

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Cooling Nozzle
HSK A63WH-MAHUR/L-10	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	EZ 125

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.


⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole when it is not used for the adaptation. Supplied in the attached plastic bag.

MODULAR-GRIP • EXCHANGEABLEHEADS

IM-MAHD

Holders for Parting, Grooving, Turning and Facing Adapters with ISO 26622-1(*)
Tapered Shank



T= See specific adapter dimensions
• Right-h and shown

Designation	SS	L	f ₁
IM40 MAHD	40	43.00	18.0
IM50 MAHD	50	47.00	23.0
IM63 MAHD	63	47.00	29.0

• (*) Tools with orientation holes in the flange groove can be supplied on request

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Nozzle Screw	Nozzle	Cooling Nozzle
IM40 MAHD	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	SR 76-1022	EZA 125	EZ 125
IM50 MAHD	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	SR 76-1022	EZA 125*	EZ 125
IM63 MAHD	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	SR 76-1022	EZA 125	EZ 125

* Optional, should be ordered separately


⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.

⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole when it is not used for the adaptation. Supplied in the attached plastic bag.

IM-MAHPD

Perpendicular Holders for Parting, Grooving, Turning and Facing Adapters with ISO 26622-1(*) Tapered Shank

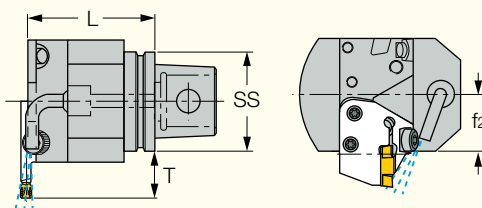

T= See specific adapter dimensions
• Right-hand shown

Designation	SS	L	f ₂
IM40 MAHPD	40	44.00	25.00
IM50 MAHPD	50	45.00	26.00
IM63 MAHPD	63	45.00	33.00

• (*) Tools with orientation holes in the flange groove can be supplied on request

For tools, see pages: HFPAD-3 (27) • HFPAD-4 (27) • HFPAD-5 (28) • HFPAD-6 (28).

Spare Parts



Designation	Lower Locking Screw	Key	Side Locking Screw	Upper Locking Screw	Key 1	Sealing Screw	Pipe	Cooling Nozzle
IM-MAHPD	SR M5-04451	T-20/5	SR 14-519 ⁽²⁾	SR M6X20-XT ⁽¹⁾	HW 5.0	SR M6X6DIN551 ⁽³⁾	EZP 5	EZ 125

⁽¹⁾ For CGPAD, HGPAD, TGPAD and HFPAD adapters. Supplied with the tools.


⁽²⁾ For DGAD, HGAD and PCADR/L adapters. Supplied in the attached plastic bag.

⁽³⁾ Used to prevent chips from entering the upper locking screw hole when it is not used for the adaptation. Supplied in the attached plastic bag.

TOOL BLOCKS

SGTBU/SGTBN

Blocks for Various Parting and Grooving Blades

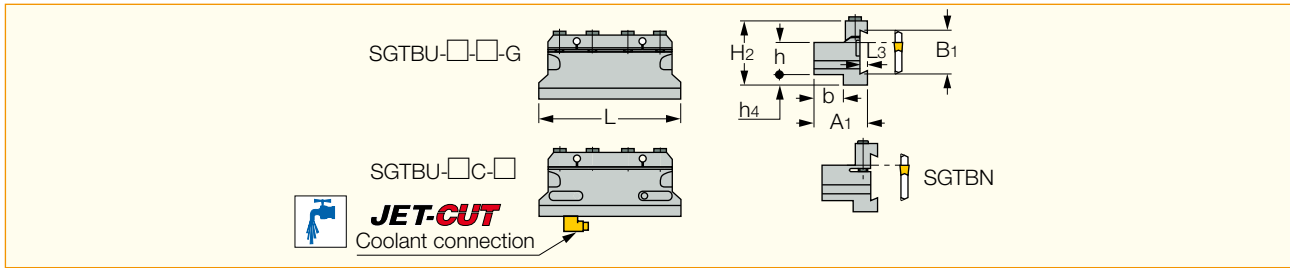

Designation	h	b	B ₁	A ₁	H ₂	h ₄	L ₃	L
SGTBN 16-2	16.0	16.0	19.0	26.00	30.0	4.0	2.00	76.00
SGTBU 16-5G	16.0	17.0	26.0	34.00	43.0	13.0	4.00	86.00
SGTBU 20-5G	20.0	21.0	26.0	38.00	43.0	9.0	4.00	86.00
SGTBU 20-6G	20.0	19.0	32.0	38.00	50.0	13.0	5.30	100.00
SGTBU 25-5G	25.0	23.0	26.0	42.00	45.0	5.0	4.00	110.00
SGTBU 25-6G	25.0	23.0	32.0	42.00	50.0	8.0	5.30	110.00
SGTBU 25-8M	25.0	23.0	45.0	42.00	70.0	27.0	5.30	110.00
SGTBU 25C-6 ⁽¹⁾	25.0	23.0	32.0	42.00	50.0	8.0	5.30	110.00
SGTBU 32-25-6G	32.0	25.0	32.0	44.00	54.0	5.0	5.30	110.00
SGTBU 32-6G	32.0	29.0	32.0	48.00	54.0	5.0	5.30	110.00
SGTBU 32-8M	32.0	29.0	45.0	48.00	70.0	20.0	5.30	110.00
SGTBU 40-6G	40.0	-	32.0	60.00	57.0	-	5.30	114.00
SGTBU 40-9	40.0	41.0	52.6	66.00	81.0	22.0	8.00	130.00
SGTBU 50-9	50.0	41.0	52.6	66.00	83.0	14.0	8.00	135.00

• Choose blade by B₁ dimension

⁽¹⁾ Elbow-style connector unit supplied with each JET-CUT tool block

For tools, see pages: CGFG 51-P8 (67) • HFFA (20) • HFFH (20) • HFFR/L-T (29) • PCHBR/L (92) • TNFFA-IQ (87) • TNFFH-IQ (86).

Spare Parts


Designation	Top Clamp	Screw	Key	Pipe Fitting	Pipe Fitting 1	Pipe Fitting 2	Pipe Fitting 3
SGTBN 16-2		SR M5X25DIN912 12.9	HW 4.0				
SGTBU 16-5G	BKU 86	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 20-5G	BKU 86	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 20-6G	BKU 100	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 25-5G	BKU 105	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 25-6G	BKU 110	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 25-8M	BKU 110	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 25C-6	BKU 110	SR M6X30DIN912 12.9	HW 5.0	SGCU-344	CF 343*	CGF 343*	CGM 343*
SGTBU 32-25-6G	BKU 110	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 32-6G	BKU 110	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 32-8M	BKU 110	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 40-6G	BKU 110	SR M6X30DIN912 12.9	HW 5.0				
SGTBU 40-9	BK 509	SR M8X30DIN912 12.9	HW 6.0				
SGTBU 50-9	BK 509	SR M8X30DIN912 12.9	HW 6.0				

* Optional, should be ordered separately

TOOL BLOCKS

SGTBK

Blocks for Heavy Duty Parting and Grooving Blades

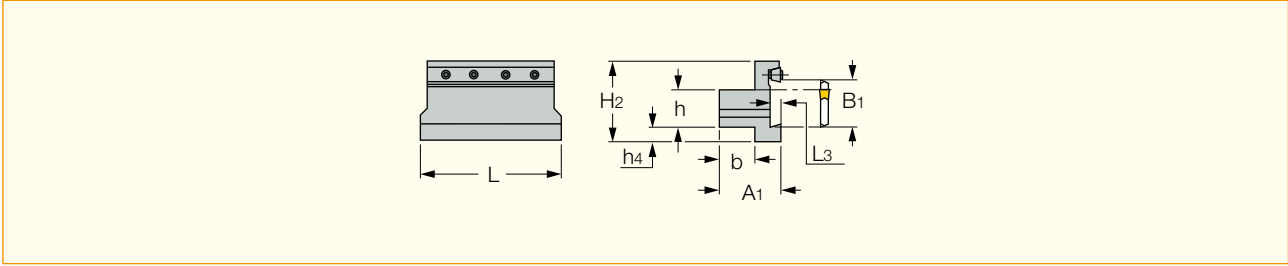

Designation	h	b	L ₃	B ₁	A ₁	H ₂	h ₄	L
SGTBK 32-9	32.0	28.0	8.50	32.0	48.00	62.0	3.0	120.00
SGTBK 38-9	38.0	35.0	8.50	52.6	60.00	90.0	25.0	135.00
SGTBK 40-9	40.0	35.0	8.50	52.6	60.00	90.0	23.0	135.00
SGTBK 50-9	50.0	40.0	8.50	52.6	65.00	90.0	15.0	135.00

• Choose blade by B₁ dimension

For tools, see pages: CGFG 51-P8 (67) • HFFA (20) • HFFH (20) • PCHBR/L (92) • TNFFA-IQ (87) • TNFFH-IQ (86).

Spare Parts




Designation	Key	Side Clamp	Screw
SGTBK 32-9	HW 5.0	BK 32-9 WEDG	SR M6X16DIN912 12.9
SGTBK 38-9	HW 5.0	BK 40-9	SR M6X20DIN912 12.9
SGTBK 40-9	HW 5.0	BK 40-9	SR M6X20DIN912 12.9
SGTBK 50-9	HW 5.0	BK 40-9	SR M6X20DIN912 12.9

MODULAR-GRIP • CAMFIX

C#-TBK-R/L

Blocks with CAMFIX (ISO 26623-1 standard) Exchangeable, Tapered Shanks for Parting and Grooving Blades

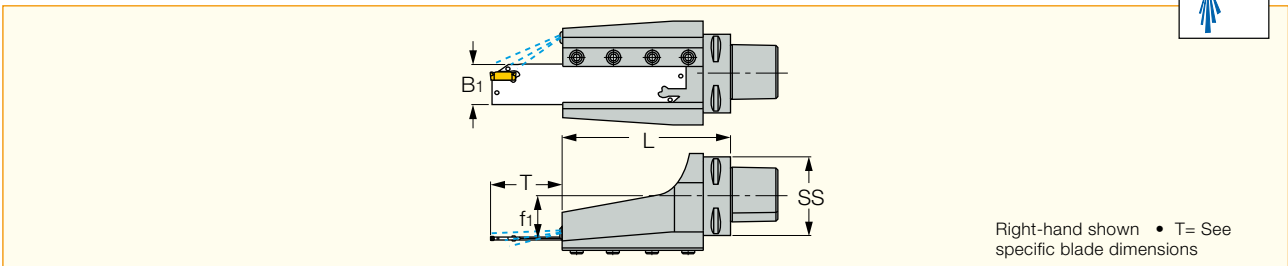

Right-hand shown • T= See specific blade dimensions

Designation	SS	f ₁	L	B ₁
C6 TBK-32R/L	63	32.0	138.00	32.0
C8 TBK-32R	80	40.5	147.00	32.0
C8 TBK-52R	80	40.5	161.00	52.0

For tools, see pages: HFFA (20) • HFFH (20) • PCHBR/L (92) • TNFFA-IQ (87) • TNFFH-IQ (86).

Spare Parts





Designation	Side Clamp	Screw	Key	Cooling Nozzle
C6 TBK-32R/L	BK 32-9 WEDG	SR M6X16DIN912 12.9	HW 5.0	EZ 125
C8 TBK-32R	BK 32-9 WEDG	SR M6X16DIN912 12.9	HW 5.0	EZ 125
C8 TBK-52R	BK 40-9	SR M6X16DIN912 12.9	HW 5.0	EZ 125

MODULAR-GRIP • HSK

HSK A-WH-TBK-R/L

Blocks with HSK Exchangeable Tapered Shanks for Parting and Grooving Blades

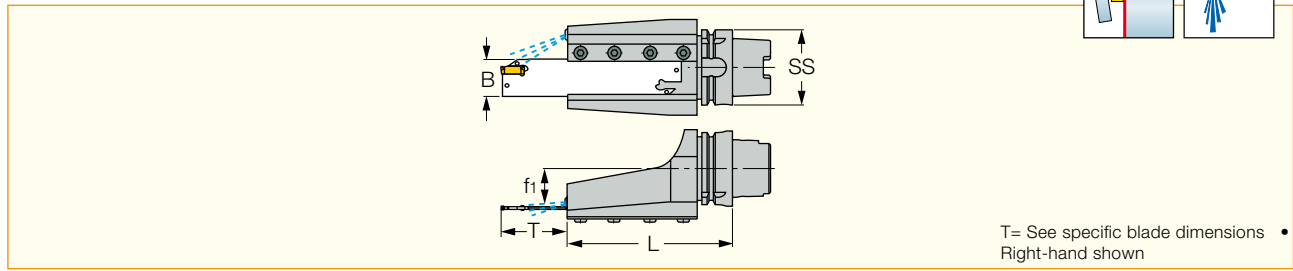

T= See specific blade dimensions • Right-hand shown

Designation	SS	L	f ₁	B ₁ ⁽¹⁾
HSK A63WH-TBK-32R/L	63	138.00	32.0	32.0
HSK A100WH-TBK-32L	100	150.00	50.0	32.0
HSK A100WH-TBK-52L	100	168.00	25.0	52.0

• A cooling tube must be used with all coolant through HSK spindles (should be ordered separately). • Complies with the ICTM and HSK-T standards.

⁽¹⁾ Blade size B₁, has to fit this dimension.

For tools, see pages: HFFA (20) • HFFH (20) • PCHBR/L (92) • TNFFA-IQ (87) • TNFFH-IQ (86).

Spare Parts





Designation	Side Clamp	Screw	Key	Cooling Nozzle
HSK A63WH-TBK-32L	BK 32-9 WEDG	SR M6X16DIN912 12.9	HW 5.0	EZ 125
HSK A63WH-TBK-32R	BK 32-9 WEDG	SR M6X16DIN912 12.9	HW 5.0	EZ 125
HSK A100WH-TBK-32L	BK 32-9 WEDG	SR M6X16DIN912 12.9	HW 5.0	SATZ-M12X1-M6

EXCHANGEABLEHEADS • ISCAR-GRIP

IM63 XMZ TBK

Blocks for Parting and Grooving Blades with ISO 26622-1 XMZ Tapered Shanks for Mazak Integrex Machines

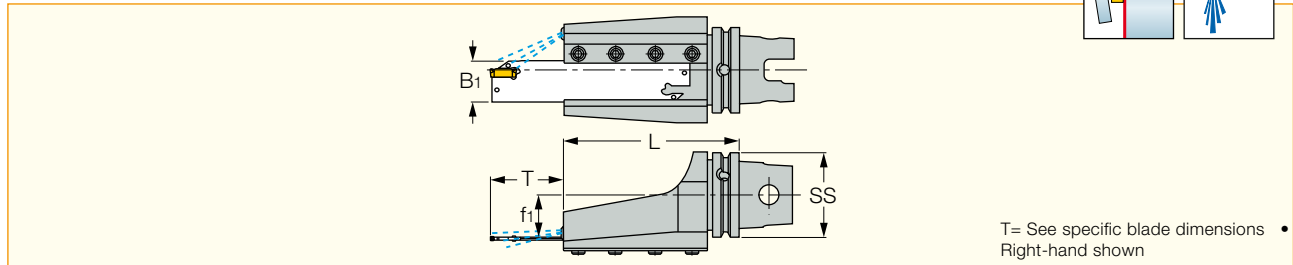

T= See specific blade dimensions • Right-hand shown

Designation	SS	f ₁	L	B ₁
IM63 XMZ TBK-32L	63	29.0	130.00	32.0

For tools, see pages: HFFA (20) • HFFH (20) • PCHBR/L (92) • TNFFA-IQ (87) • TNFFH-IQ (86).

Spare Parts




Designation	Key	Side Clamp	Screw	Cooling Nozzle
IM63 XMZ TBK	HW 5.0	BK 32-9 WEDG	SR M6X16DIN912 12.9	EZ 125

TOOL BLOCKS

UBHCR/L

Holders for Grooving, Turning and Parting Blades

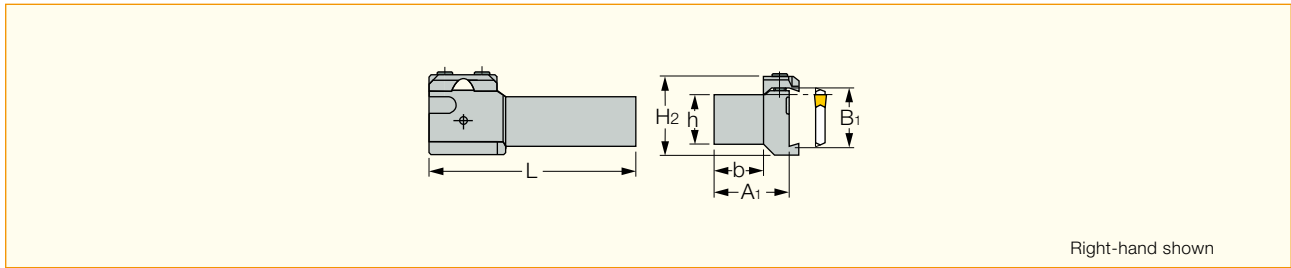

Right-hand shown

Designation	h	B ₁	b	H ₂	A ₁	L
UBHCR/L 20-26	20.0	26.0	20.0	42.0	35.60	100.00
UBHCR/L 25-32	25.0	32.0	25.0	46.0	40.00	130.00
UBHCR/L 32-32	32.0	32.0	32.0	46.0	47.00	130.00

• Choose blade by B₁ dimension

For tools, see pages: HFFA (20) • HFFH (20) • HFFR/L-T (29) • TNFFA-IQ (87) • TNFFH-IQ (86).


Spare Parts



Designation	Key	Top Clamp	Screw	Spring Plunger
UBHCR/L	HW 5.0	BKU 176 307	SR M6X16DIN912 12.9	SPRING PLUNGER M6X14X3.5

SGTBF

Perpendicular Blocks for Parting and Grooving Blades

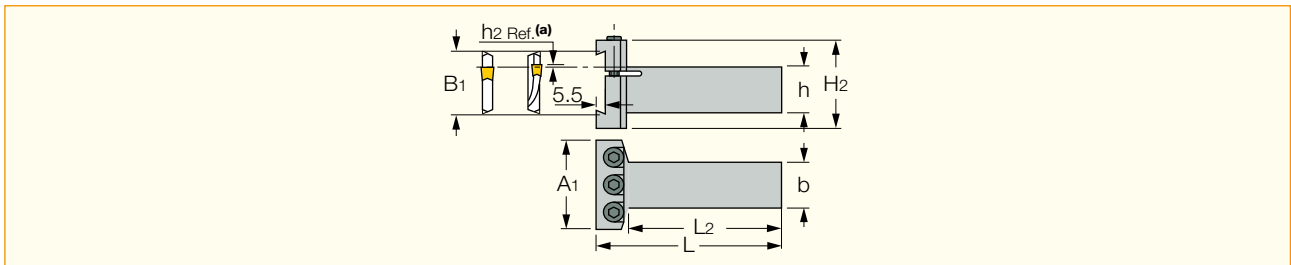

Designation	h	b	B ₁	L	L ₂	A ₁	H ₂	L ₃
SGTBF 25-A	25.0	25.0	32.0	102.00	80.00	48.00	48.0	5.50
SGTBF 32-A	32.0	32.0	32.0	116.00	100.00	48.00	48.0	5.50

• (a) h₂ Ref. as defined for SELF-GRIP face grooving blades • Choose blade by B₁ dimension

For tools, see pages: HFFH (20) • HFFR/L-T (29) • TNFFH-IQ (86).


Spare Parts



Designation	Key	Screw
SGTBF	HW 5.0	SR M6X40DIN912

GHFG-R/L-8

Holders for Face Grooving and Turning Along Shafts

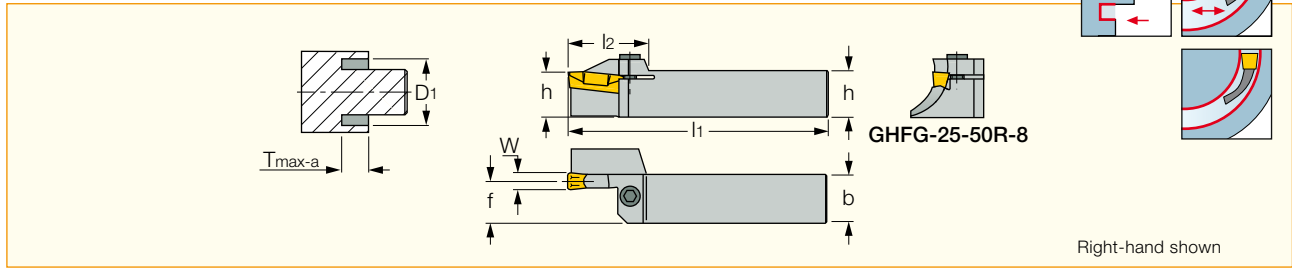

Designation	T _{max-a}	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	h	b	l ₁	l ₂	f
GHFG 25-50R/L-8	25.00	50.0	64.0	25.0	25.0	150.00	41.0	22.0
GHFG 25-63R/L-8	25.00	63.0	82.0	25.0	25.0	150.00	41.0	22.0
GHFG 32-63R-8	25.00	63.0	82.0	32.0	32.0	170.00	41.0	30.0

• For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: GDMM-CC (76) • GDMY (73) • GDMY (full radius) (74) • GDMY-F (75) • GIFG-E (W=8) (68).



Spare Parts

Designation	Screw	Key
GHFG-R/L-8	SR M6X25DIN912 12.9 U	HW 5.0



GHFGR/L-8

Holders for Face Grooving and Turning

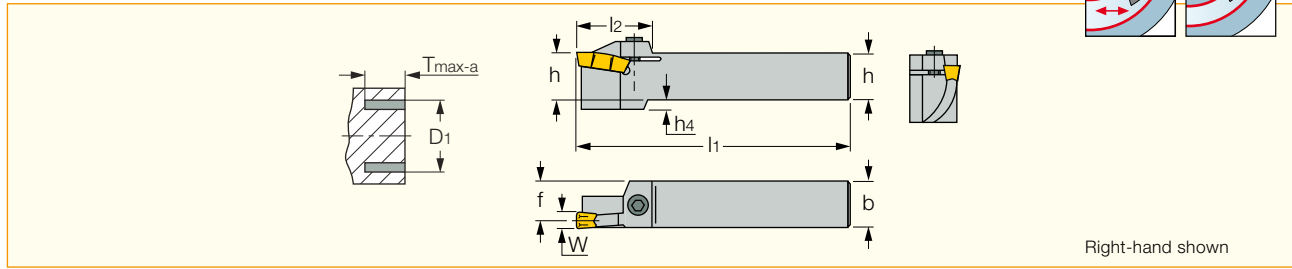

Designation	D1 min ⁽¹⁾	D1 max ⁽²⁾	h	b	l1	l2	f	h4
GHFGR/L 25-80-8	80.0	115.0	25.0	25.0	150.00	43.5	21.3	6.0
GHFGR/L 32-80-8	80.0	115.0	32.0	32.0	170.00	43.5	28.3	-
GHFGR/L 25-105-8	105.0	160.0	25.0	25.0	150.00	43.5	21.3	6.0
GHFGR/L 32-105-8	105.0	160.0	32.0	32.0	170.00	43.5	28.3	-
GHFGR/L 25-155-8	155.0	510.0	25.0	25.0	150.00	43.5	21.3	6.0
GHFGR/L 32-155-8	155.0	510.0	32.0	32.0	170.00	43.5	28.3	-

Tmax for GHFGR/L (25/32)-80-8							
D	GIF 8...	GIFG 8...	GDMY 8...	GIPA 8...	GIDA 8...	GIA 8...	GDMM 8CC...
80	16	23	23	20	24	16	24
82	17	23	23	20	24	17	24
84	18	23	23	21	24	18	24
86	19	23	23	21	24	19	24
88	20	23	23	22	24	20	24
90	20	23	23	22	24	20	24
96	20	23	23	22	24	20	24
104	20	23	23	22	24	20	24
115	22	23	23	22	24	22	24

Tmax for GHFGR/L (25/32)-105-8							
D	GIF 8...	GIFG 8...	GDMY 8...	GIPA 8...	GIDA 8...	GIA 8...	GDMM 8CC...
105	21	23	23	23	24	21	24
114	22	23	23	23	24	22	24
126	23	23	24	23	24	23	24
140-160	24	24	24	23	24	24	24

Tmax for GHFGR/L (25/32)-155-8							
D	GIF 8...	GIFG 8...	GDMY 8...	GIPA 8...	GIDA 8...	GIA 8...	GDMM 8CC...
155	24	24	24	23	24	24	24
180	24	24	24	23	24	24	24
210-510	24	24	24	23	24	24	24

- No limitation to widening groove either way after initial grooving. • Tmax depends on the penetration diameter and the insert.
- For user guide see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: GDMF (69) • GDMM-CC (76) • GDMN (70) • GDMY (73) • GDMY (full radius) (74) • GDMY-F (75) • GIA-K (long pocket) (73) • GIF (long pocket) (71) • GIF-E (W=8,10 full radius) (72) • GIF-E (W=8,10) (71) • GIFG-E (W=8) (68) • GIPA/GIDA 8 (full radius) (81).


Spare Parts



Designation	Screw	Key
GHFGR/L 25-80-8	SR M6X25DIN912 12.9 U	HW 5.0
GHFGR/L 32-80-8	SR M6X20DIN912 12.9	HW 5.0
GHFGR/L 25-105-8	SR M6X25DIN912 12.9 U	HW 5.0
GHFGR/L 32-105-8	SR M6X25DIN912 12.9 U	HW 5.0
GHFGR/L 25-155-8	SR M6X25DIN912 12.9 U	HW 5.0
GHFGR/L 32-155-8	SR M6X25DIN912 12.9 U	HW 5.0

GHAR/L-8

External Holders for Grooving and Turning Adapters

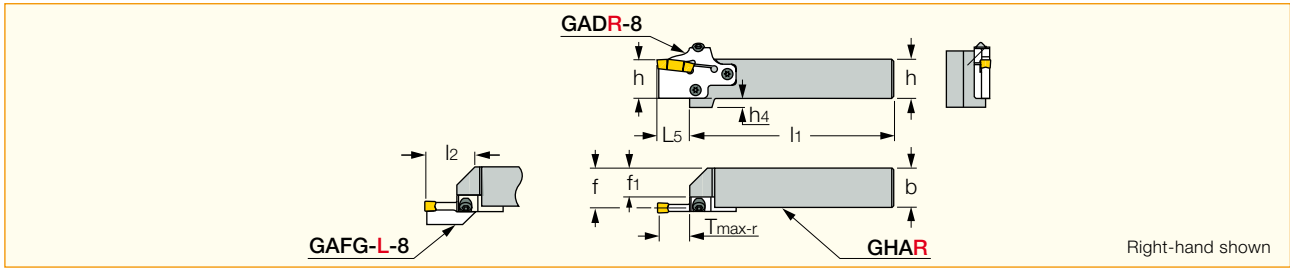

Designation	h	b	f ₁	l ₁	l ₂	L ₅	h ₄	T _G ⁽¹⁾	T _{max-r} ⁽²⁾	F _G ⁽²⁾	T _{max-a} ⁽²⁾
GHAR/L 25-8	25.0	25.0	16.0	124.50	45.0	25.50	14.0	GADR/L 8	25.50	GAFG...R/L-8	25.00
GHAR/L 32-8	32.0	32.0	23.0	144.50	45.0	25.50	7.0	GADR/L 8	25.50	GAFG...R/L-8	25.00

• Adapters GADR/L-8 for turning and grooving, GAFG-R/L-8 for face-grooving • $f = f_1 + f_2$ (see adapter dimensions)

⁽¹⁾ Adapters to be ordered separately. ⁽²⁾ Adapters to be ordered separately.

For tools, see pages: GAFG-R/L-8 (67) • PCADR/L 34N-RE (93).


Spare Parts



Designation	Side Locking Screw	Key	Upper Locking Screw	Key 1
GHAR/L-8	SR 14-519	T-20/5	SR M6X25DIN912 12.9 U	HW 5.0

GHAPR/L-8

External Holders for Grooving and Turning Perpendicularly Oriented Adapters

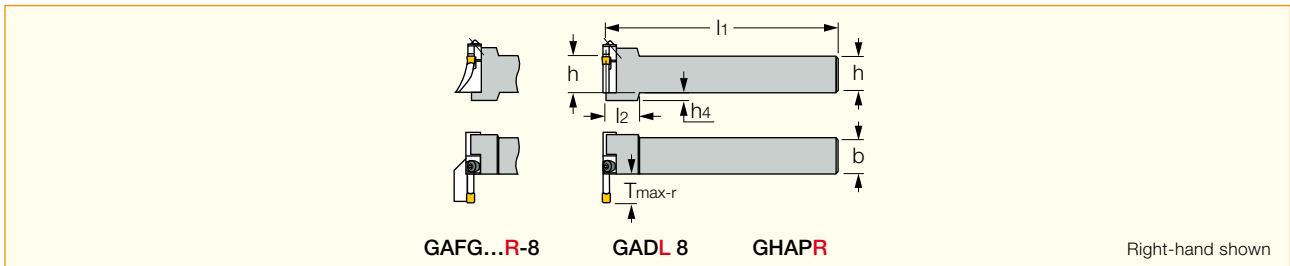

Designation	h	b	l ₁	l ₂	h ₄	T _G ⁽¹⁾	T _{max-r} ⁽²⁾	F _G ⁽³⁾	T _{max-a}
GHAPR/L 32-8	32.0	32.0	155.00	30.0	7.0	GADR/L 8	25.50	GAFG...R/L-8	26.00

⁽¹⁾ Adapters to be ordered separately ⁽²⁾ See specific adapter dimensions ⁽³⁾ Adapters to be ordered separately.

For tools, see pages: GAFG-R/L-8 (67) • PCADR/L 34N-RE (93).

Spare Parts




Designation	Side Locking Screw	Key	Upper Locking Screw	Key 1
GHAPR/L 32-8	SR 14-519	T-20/5	SR M6X25DIN912 12.9 U	HW 5.0

EXCHANGEABLEHEADS • CAMFIX

C#-GHAPR/L-8

Perpendicular Holders for Grooving, Turning and Facing Adapters with CAMFIX Exchangeable Shanks

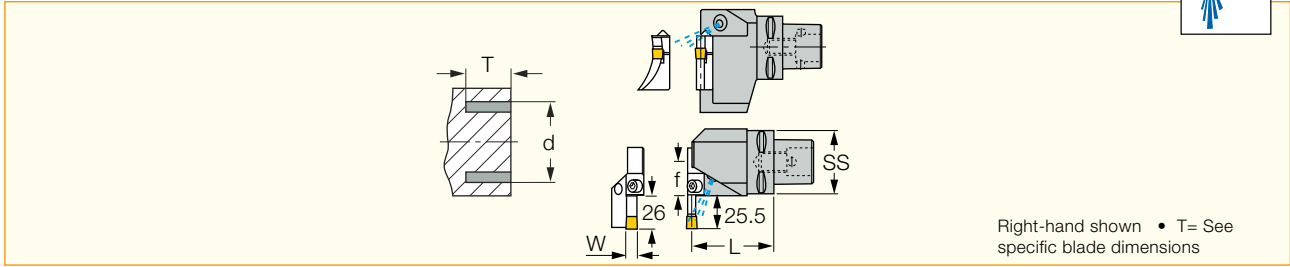

Designation	SS	L	f	W	d Range	T range
C5 GHAPR/L-8	50	64.00	26.00	8.00	80-510	15-25
C6 GHAPR/L-8	63	75.00	33.00	8.00	80-510	15-25
C8 GHAPR-8	80	75.00	43.00	8.00	80-510	15-25

For tools, see pages: GAFG-R/L-8 (67) • PCADR/L 34N-RE (93).


Spare Parts



Designation	Screw	Key	Screw 1	Key 1	Cooling Nozzle
C#-GHAPR/L-8	SR 14-519	T-20/5	SR M6X25DIN912 12.9U	HW 5.0	EZ 125

C#-GHAD-8

Holders for Grooving, Turning and Facing Adapters with CAMFIX Exchangeable Shanks

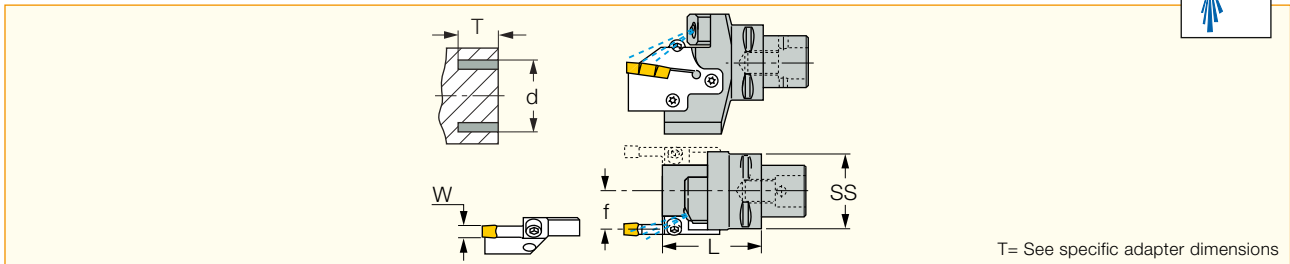

Designation	SS	L	f	W	d Range	T Range
C5 GHAD-8	50	65.00	26.00	8.00	80-510	15-25
C6 GHAD-8	63	65.00	32.50	8.00	80-510	15-25

For tools, see pages: GAFG-R/L-8 (67) • PCADR/L 34N-RE (93).

Spare Parts




Designation	Screw	Key	Screw 1	Key 1	Screw 2	Nozzle Body	Cooling Nozzle
C#-GHAD-8	SR 14-519	T-20/5	SR M6X25DIN912 12.9U	HW 5.0	SR 76-1022	EZA 125	EZ 125

EXCHANGEABLEHEADS • ISCAR-GRIP

IM-GHAPR/L-8

Perpendicular Holders for Grooving, Turning and Facing Adapters with ISO 26622-1(*)
Tapered Shank

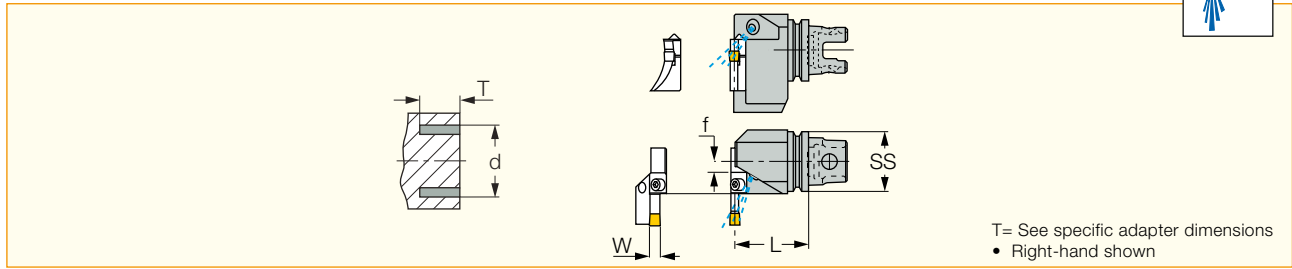

T= See specific adapter dimensions
• Right-hand shown

Designation	SS	L	f	W	d Range	T range
IM50 GHAPR/L-8	50	60.00	26.00	8.00	80-510	15-25
IM63 GHAPL-8	63	75.00	33.00	8.00	80-510	15-25

• (*) Tools with orientation holes in the flange groove can be supplied on request

For tools, see pages: GAFG-R/L-8 (67) • PCADR/L 34N-RE (93).


Spare Parts



Designation	Screw	Key	Screw 1	Key 1	Cooling Nozzle
IM-GHAPR/L-8	SR 14-519	T-20/5	SR M6X25DIN912 12.9U	HW 5.0	EZ 125

IM-GHAD-8

Holders for Grooving, Turning and Facing Adapters with ISO 26622-1(*)
Tapered Shank

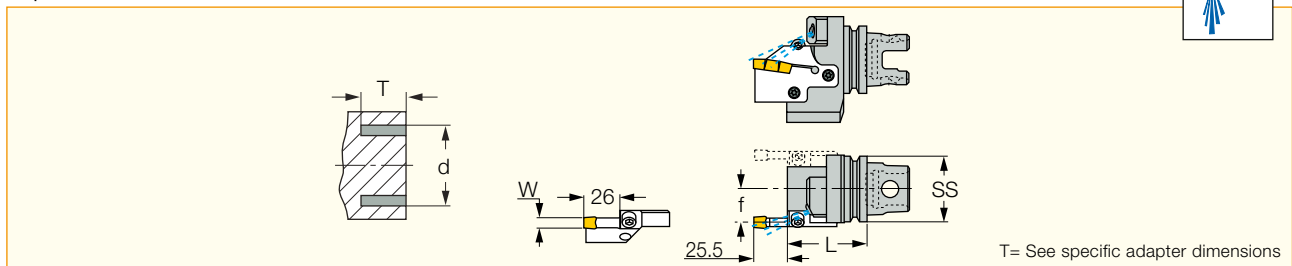

T= See specific adapter dimensions

Designation	SS	L	f	W	d Range	T range
IM50 GHAD-8	50	60.00	26.00	8.00	80-510	15-25
IM63 GHAD-8	63	60.00	32.50	8.00	80-510	15-25

• (*) Tools with orientation holes in the flange groove can be supplied on request

For tools, see pages: GAFG-R/L-8 (67) • PCADR/L 34N-RE (93).


Spare Parts



Designation	Screw	Key	Screw 1	Key 1	Screw 2	Nozzle Body	Cooling Nozzle
IM-GHAD-8	SR 14-519	T-20/5	SR M6X25DIN912 12.9U	HW 5.0	SR 76-1022	EZA 125	EZ 125

GAFG-R/L-8

Adapters for Face Machining

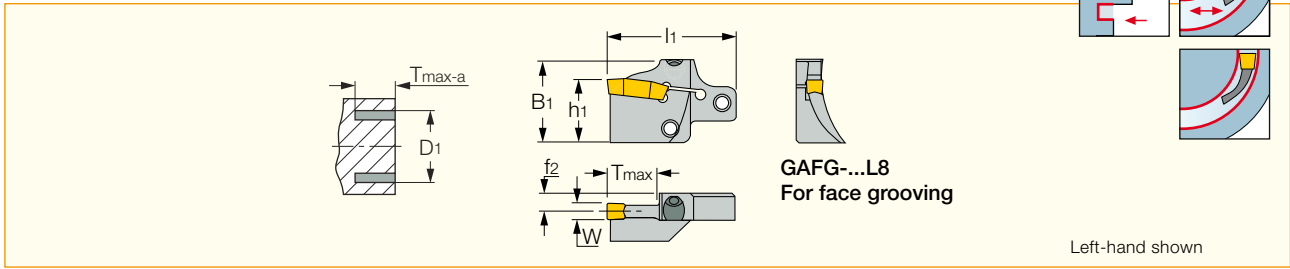

Designation	W	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	T _{max-a} ⁽³⁾	f ₂	h ₁	B ₁	l ₁
GAFG 80R/L-8	8.00	80.0	115.0	23.00	9.00	32.0	42.0	63.50
GAFG 105R/L-8	8.00	105.0	160.0	25.00	9.00	32.0	42.0	63.50
GAFG 155R/L-8	8.00	155.0	510.0	25.00	9.00	32.0	42.0	63.50

- No limitation for widening of groove either way after initial grooving
- For user guide, see pages 98-114.


⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter ⁽³⁾ For GIFG-8 & GDMY-8 T_{max}=25 mm for D range.

For inserts, see pages: GDMA (79) • GDMF (69) • GDMM-CC (76) • GDMN (70) • GDMY (73) • GDMY (full radius) (74) • GDMY-F (75) • GIA-K (long pocket) (73) • GIF (long pocket) (71) • GIF-E (W=8,10 full radius) (72) • GIF-E (W=8,10) (71) • GIFG-E (W=8) (68) • GIPA/GIDA 8 (full radius) (81).

For holders, see pages: C#-GHAD-8 (65) • C#-GHAPR/L-8 (65) • GHAPR/L-8 (64) • GHAR/L-8 (64) • IM-GHAD-8 (66) • IM-GHAPR/L-8 (66).

CGFG 51-P8

Blades for Face Machining, with 8 mm Inserts

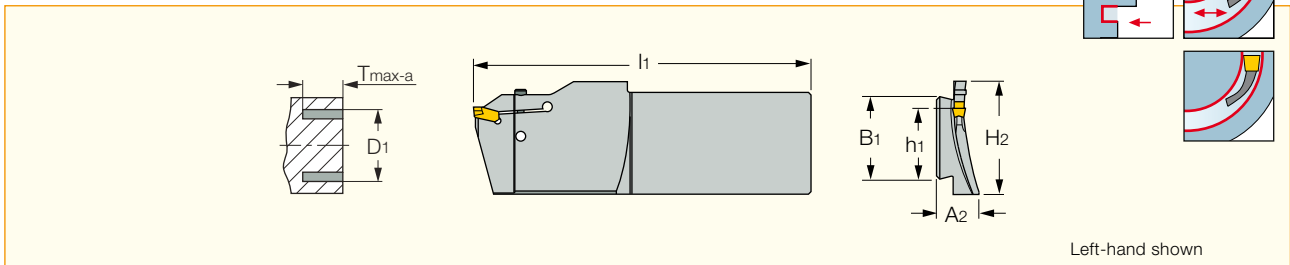

Designation	W	D _{1 min} ⁽¹⁾	D _{1 max} ⁽²⁾	T _{max-a}	B ₁	h ₁	l ₁	H ₂	A ₂
CGFG 51-180R/L-P8	8.00	180.0	240.0	70.00	52.6	45.0	200.00	60.0	27.5
CGFG 51-240R/L-P8	8.00	240.0	320.0	80.00	52.6	45.0	210.00	70.0	26.0
CGFG 51-320R/L-P8	8.00	320.0	440.0	90.00	52.6	45.0	220.00	80.0	24.5
CGFG 51-440R/L-P8	8.00	440.0	700.0	100.00	52.6	45.0	230.00	90.0	22.5
CGFG 51-700R/L-P8	8.00	700.0	1500.0	120.00	52.6	45.0	250.00	100.0	20.0

- For user guide, see pages 98-114.

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: GIMF (68) • GIMM 8CC (75) • GIMY (69) • GIMY (full radius) (70) • GIMY-F (74).

For holders, see pages: SGTBK (59) • SGTBU/SGTBN (58).


Spare Parts



Designation	Screw	Key
CGFG 51-P8	SR M4-2052	HW 3.0

GIFG-E (W=8)

Inserts for Deep Face Grooving and Turning

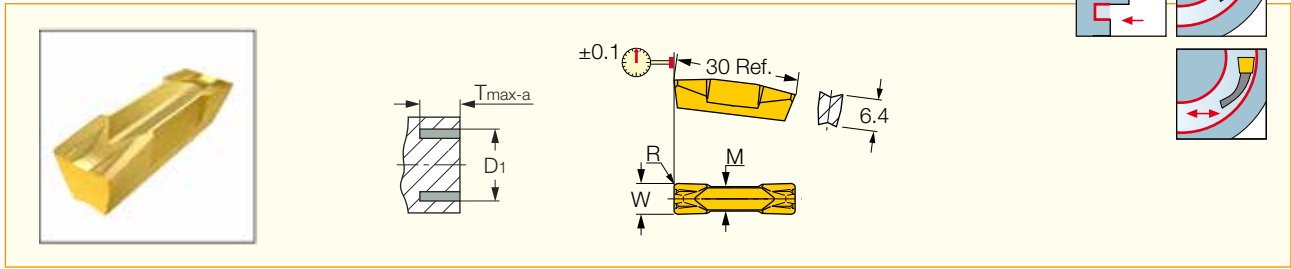


Designation	Dimensions					Tough ↔ Hard		Recommended Machining Data f face-groove (mm/rev)
	W±0.02	R±0.05	D1 min	T _{max-a}	M	IC635	IC20	
GIFG 8.00E-0.80	8.00	0.80	50.0	25.00	6.0	●	●	0.15-0.25
GIFG 8.00E-1.20	8.00	1.20	50.0	25.00	6.0	●	●	0.15-0.25

• For cutting speed recommendations, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFG-R/L-8 (62) • GHFGR/L-8 (63).

GIMF

Utility Single-Ended Inserts for Grooving and Turning

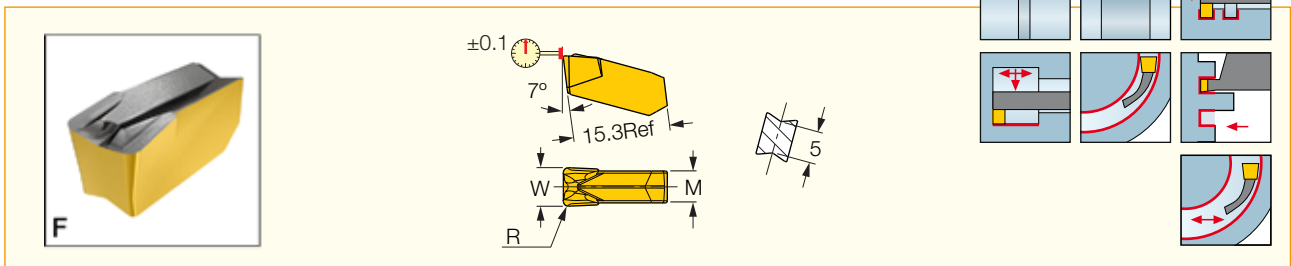


Designation	Dimensions			Tough ↔ Hard								Recommended Machining Data			
	W±0.05	R±0.05	M	IC830	IC8250	IC808	IC908	IC806	IC907	IC20	IC428	IC5010	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIMF 406	4.00	0.60	3.2	●	●	●	●	●	●	●	●	●	0.75-2.40	0.19-0.25	0.09-0.16
GIMF 502	5.00	0.20	4.0	●	●	●	●	●	●	●	●	●	0.25-3.00	0.18-0.26	0.11-0.18
GIMF 508	5.00	0.80	4.0	●	●	●	●	●	●	●	●	●	1.00-3.00	0.23-0.35	0.11-0.21
GIMF 605	6.00	0.50	5.0	●	●	●	●	●	●	●	●	●	0.60-3.60	0.22-0.36	0.13-0.23
GIMF 608	6.00	0.80	5.0	●	●	●	●	●	●	●	●	●	1.00-3.60	0.24-0.42	0.13-0.25
GIMF 808	8.00	0.80	6.0	●	●	●	●	●	●	●	●	●	1.00-4.80	0.32-0.56	0.18-0.34

• Dmin for internal applications = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: CGFG 51-P8 (67) • GHMPR/L (84) • GHMR/L (83).

GDMF

Utility Double-Ended Inserts for Grooving and Turning

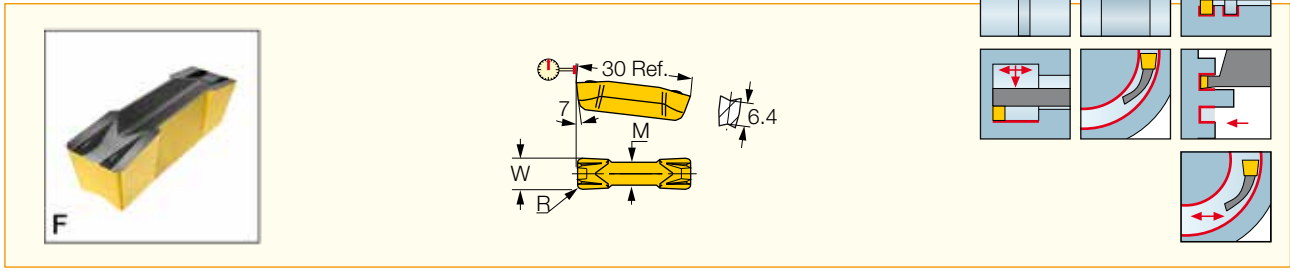


Designation	Dimensions				Tough ↔ Hard					Recommended Machining Data		
	W ± 0.05	R ± 0.05	T _{max-r}	M	IC830	IC8250	IC808	IC428	IC5010	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GDMF 808	8.00	0.80	27.00	6.0	●	●	●	●	●	1.00-4.80	0.32-0.56	0.18-0.34

• Dmin for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFGR/L-8 (63).

GIMY

Utility Single-Ended Inserts, for Grooving and Turning

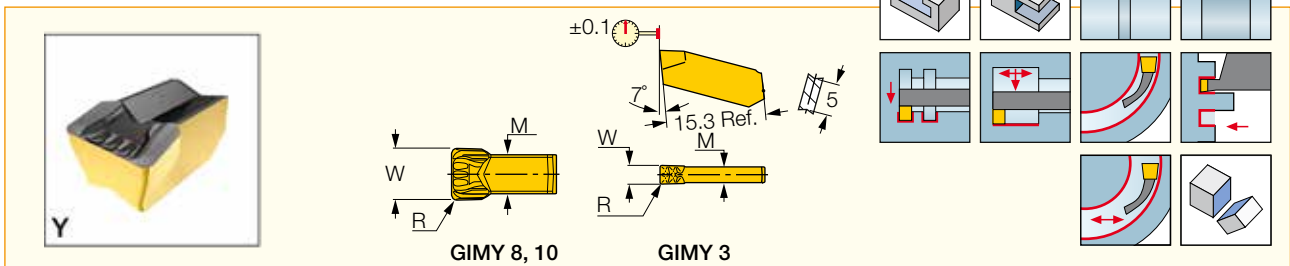


Designation	Dimensions			Tough ↔ Hard						Recommended Machining Data		
	W ± 0.05	R ± 0.05	M	IC830	IC8250	IC808	IC908	IC806	IC20	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIMY 304	3.00	0.40	2.4	●	●			●	●	0.50-1.80	0.16-0.20	0.07-0.12
GIMY 808	8.00	0.80	6.0	●	●	●	●	●	●	1.00-4.80	0.32-0.56	0.18-0.34
GIMY 1008	10.00	0.80	8.0	●		●				1.00-6.00	0.35-0.65	0.22-0.40

• Dmin for internal applications = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: CGFG 51-P8 (67) • GHMPR/L (84) • GHMR/L (83).

GIMY (full radius)

Utility Single-Ended Inserts, for Grooving and Profiling

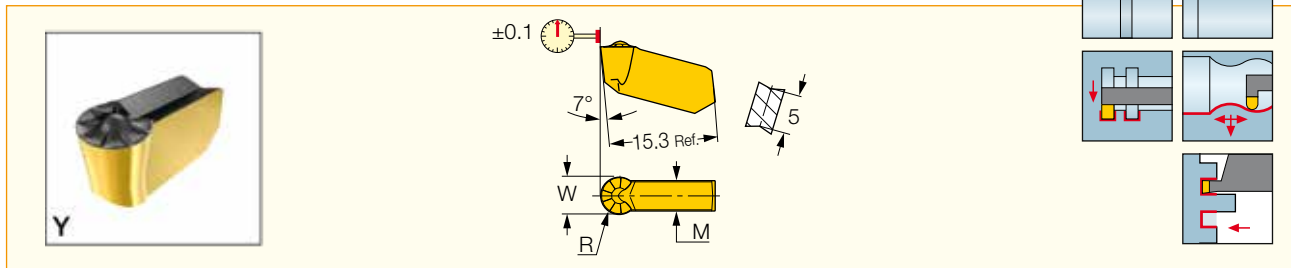


Designation	Dimensions			Tough ↔ Hard						Recommended Machining Data		
	W ± 0.05	R ± 0.05	M	IC830	IC8250	IC808	IC806	IC20	IC20N	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIMY 315	3.00	1.50	2.4	●	●	●	●	●	●	0.00-1.50	0.18-0.26	0.07-0.13
GIMY 420	4.00	2.00	3.2	●	●	●	●	●	●	0.00-2.00	0.20-0.28	0.09-0.17
GIMY 525	5.00	2.50	3.9	●	●	●	●	●	●	0.00-2.50	0.23-0.42	0.11-0.21
GIMY 630	6.00	3.00	5.0	●	●	●	●	●	●	0.00-3.00	0.24-0.50	0.13-0.25
GIMY 635-318	6.35	3.18	5.1	●	●	●	●	●	●	0.00-3.10	0.25-0.53	0.14-0.27
GIMY 840	8.00	4.00	5.6	●	●	●	●	●	●	0.00-4.00	0.32-0.67	0.18-0.34

• Dmin for internal application=70 mm • Can cut arcs to 250° • For cutting speed recommendations and user guide, see pages 98-114..

For tools, see pages: CGFG 51-P8 (67) • GHMPR/L (84) • GHMR/L (83).

GDMN

Utility Double-Ended Inserts for Grooving and Turning Ductile Materials

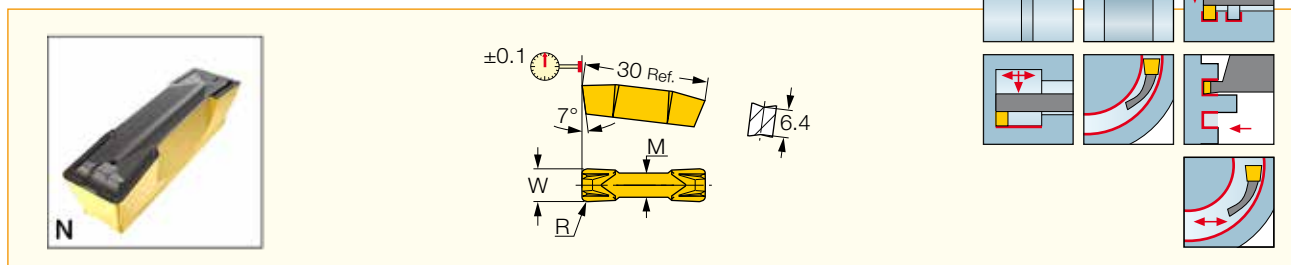


Designation	Dimensions				Tough ↔ Hard				Recommended Machining Data		
	W ± 0.05	R ± 0.05	T _{max-r}	M	IC830	IC8250	IC808	IC907	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GDMN 808	8.00	0.80	27.00	6.0	●	●	●	●	1.00-3.20	0.20-0.35	0.10-0.30

• Dmin for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFGR/L-8 (63).

GIF (long pocket)

Precision Double-Ended Inserts for Grooving

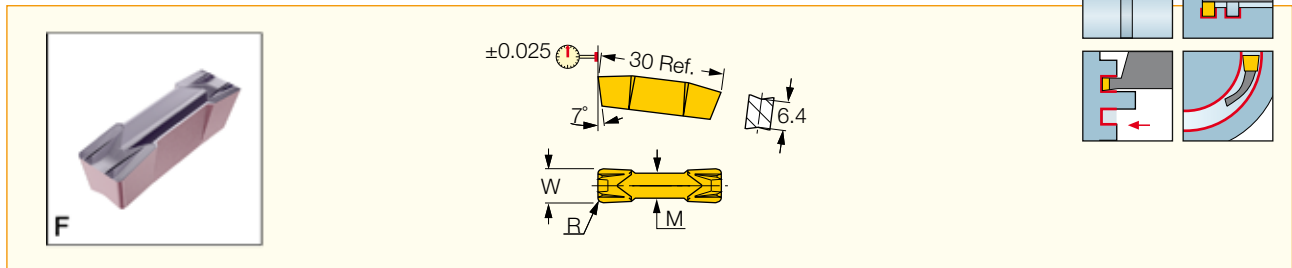


Designation	Dimensions				Tough ↔ Hard		Recommended Machining Data	
	W ± 0.02	R ± 0.03	M	T $_{max-r}$	IC806	IC20	f groove (mm/rev)	f face-groove (mm/rev)
GIF 8.00-0.40	8.00	0.40	6.0	27.00	●	●	0.18-0.31	0.14-0.23
GIF 8.00-0.80	8.00	0.80	6.0	27.00	●	●	0.18-0.34	0.14-0.25

• Dmin for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (59) • GHFGR/L-8 (57).

GIF-E (W=8,10)

Precision Double-Ended Inserts for Grooving and Turning

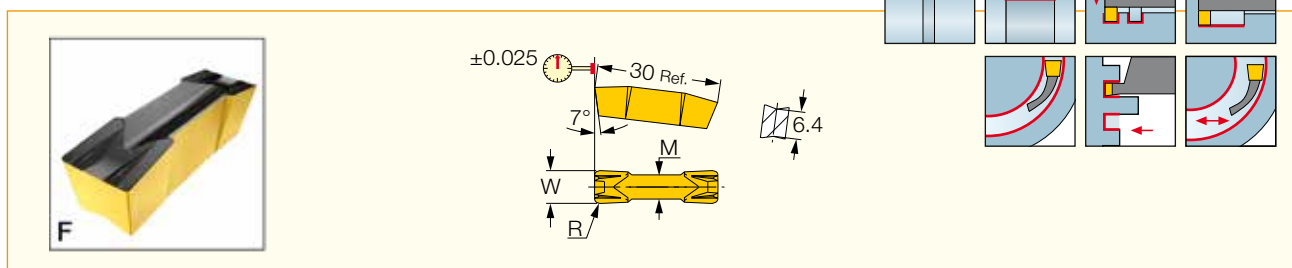


Designation	Dimensions				Tough ↔ Hard								Recommended Machining Data		
	W ± 0.02	R ± 0.05	M	T $_{max-r}$	IC830	IC8250	IC808	IC806	IC807	IC20	IC428	IC5010	a $_p$ (mm)	f turn (mm/rev)	f groove (mm/rev)
GIF 8.00E-0.40	8.00	0.40	6.0	27.00	●	●	●	●	●	●	●	●	0.50-4.80	0.29-0.48	0.18-0.31
GIF 8.00E-0.80	8.00	0.80	6.0	27.00	●	●	●	●	●	●	●	●	1.00-4.80	0.32-0.56	0.18-0.34
GIF 8.00E-1.20	8.00	1.20	6.0	27.00	●	●	●	●	●	●	●	●	1.45-4.80	0.32-0.62	0.18-0.34
GIF 10.00E-0.80	10.00	0.80	8.0	27.00	●	●	●	●	●	●	●	●	1.00-6.00	0.35-0.65	0.22-0.40
GIF 10.00E-1.20	10.00	1.20	8.0	27.00	●	●	●	●	●	●	●	●	1.45-6.00	0.35-0.72	0.22-0.40

• Dmin for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFGR/L-8 (63).

GIF-E (W=8,10 full radius)

Precision Double-Ended Full Radius Inserts, for Profiling and Grooving

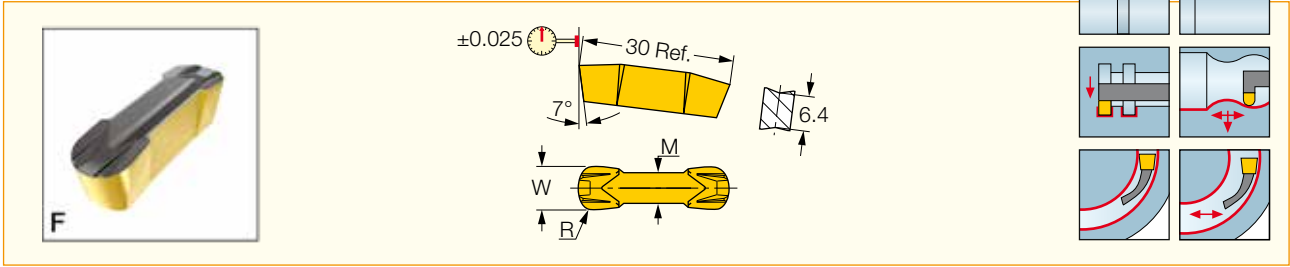

Designation	Dimensions			Tough \leftrightarrow Hard		Recommended Machining Data		
	W ± 0.02	R ± 0.05	M	IC830	IC8250	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIF 8.00E-4.00	8.00	4.00	6.0			0.00-4.00	0.32-0.67	0.18-0.34
GIF 10.00E-5.00	10.00	5.00	8.0		●	0.00-5.00	0.35-0.78	0.22-0.40


• Dmin for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFGR/L-8 (63).



GIA-K (long pocket)

Flat Top Precision Double-Ended Inserts with T-Land, for Machining Cast Iron

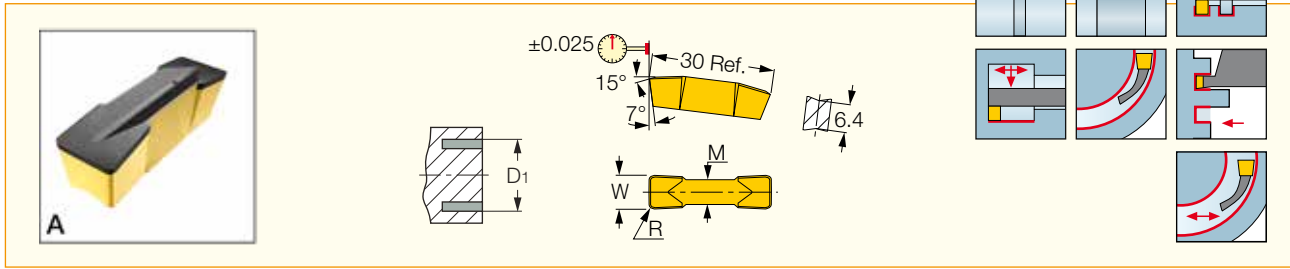


Designation	Dimensions					Tough ↔ Hard		Recommended Machining Data		
	W ± 0.02	R ± 0.05	M	T $_{max-r}$	D $_{1 min}$	IC428	IC5010	a $_p$ (mm)	f turn (mm/rev)	f groove (mm/rev)
GIA 8.00K-0.80	8.00	0.80	6.0	25.00	160.0	●	●	1.00-4.80	0.36-0.64	0.18-0.38
GIA 8.00K-1.20	8.00	1.20	6.0	25.00	160.0	●	●	1.45-4.80	0.36-0.70	0.18-0.38

• Dmin for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFGR/L-8 (63).

GDMY

Utility Double-Ended Inserts, for Grooving and Turning

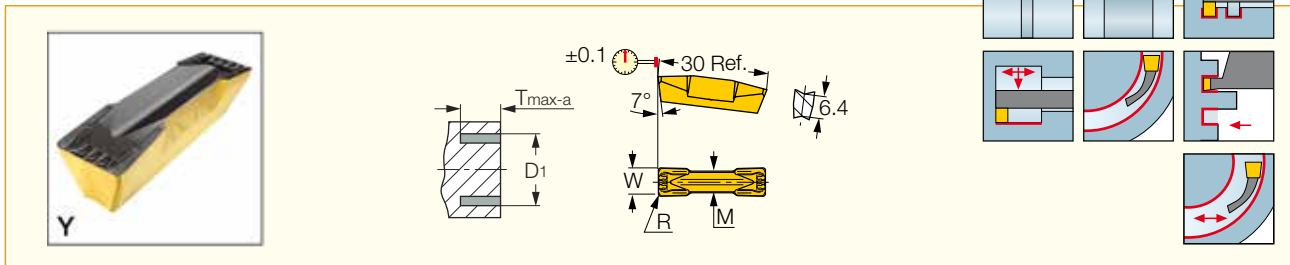

Designation	Dimensions					Tough ↔ Hard						Recommended Machining Data		
	W ± 0.05	R ± 0.05	M	D $_{1 min}$	T $_{max-r}$	IC830	IC8250	IC808	IC20	IC428	IC5010	a $_p$ (mm)	f turn (mm/rev)	f groove (mm/rev)
GDMY 808	8.00	0.80	6.0	50.0	27.00	●	●	●	●	●	●	1.00-4.80	0.32-0.56	0.18-0.34


• Dmin for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFG-R/L-8 (62) • GHFGR/L-8 (63).

CUT-GRIP

GDMY (full radius)

Utility Double-Ended Full Radius Inserts for Grooving and Profiling

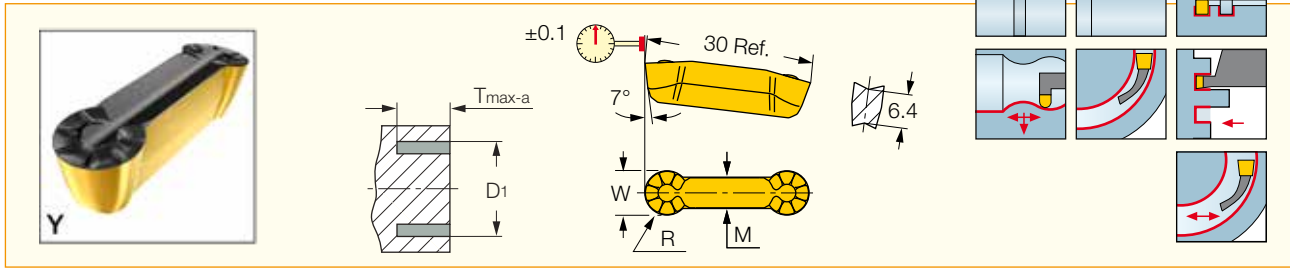

Designation	Dimensions					Tough ↔ Hard							Recommended Machining Data		
	$W_{\pm 0.05}$	$R_{\pm 0.05}$	M	D_1 min	T_{max-r}	IC830	IC8250	IC808	IC806	IC20	IC428	IC5010	a_p (mm)	f turn (mm/rev)	f groove (mm/rev)
GDMY 840	8.00	4.00	5.6	50.0	25.00	●	●	●	●	●	●	●	0.00-4.00	0.32-0.67	0.18-0.34


• Can cut arcs to 250° • D_{min} for internal machining = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFG-R/L-8 (62) • GHFGR/L-8 (63).

CUT-GRIP

GIMY-F

Utility Single-Ended Inserts, for Grooving and Profiling Ductile Materials

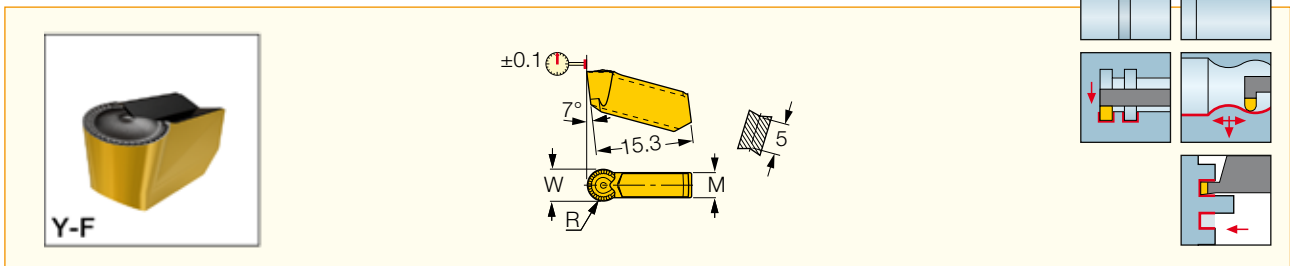


Designation	Dimensions			Tough ↔ Hard				Recommended Machining Data		
	$W_{\pm 0.05}$	$R_{\pm 0.05}$	M	IC8250	IC808	IC908	IC806	a_p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIMY 315F	3.00	1.50	2.4		●			0.00-1.50	0.18-0.26	0.07-0.13
GIMY 525F	5.00	2.50	3.9		●		●	0.00-2.50	0.23-0.42	0.11-0.21
GIMY 630F	6.00	3.00	5.0		●	●	●	0.00-3.00	0.24-0.50	0.13-0.25
GIMY 840F	8.00	4.00	5.6	●				0.00-4.00	0.32-0.67	0.18-0.34

• D_{min} for internal applications = 70 mm • Can cut arcs to 250° • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: CGFG 51-P8 (59) • GHMPR/L (71) • GHMR/L (70).

GDMY-F

Utility Double-Ended Inserts, for Grooving and Profiling Ductile Materials

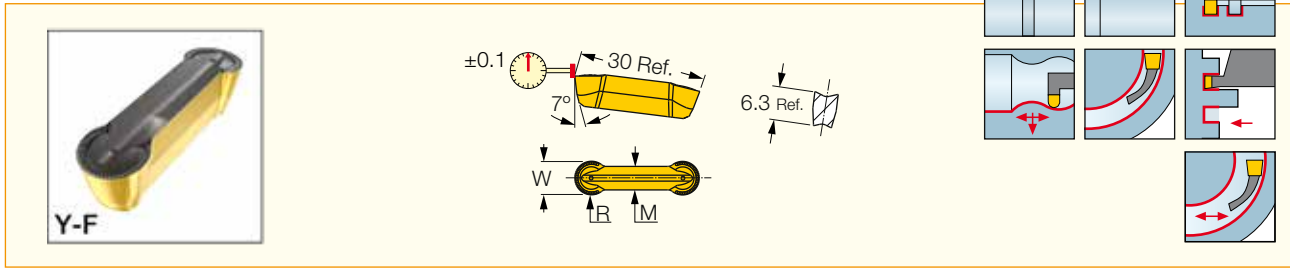


Designation	Dimensions				Tough ↔ Hard		Recommended Machining Data		
	W ± 0.05	R ± 0.05	M	T $_{max-r}$	IC808	IC908	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GDMY 840F	8.00	4.00	5.6	25.00	●	●	0.00-4.00	0.32-0.67	0.18-0.34

• Dmin for internal applications = 65 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (59) • GHFG-R/L-8 (56) • GHFGR/L-8 (57).

GIMM 8CC

Single-Ended Utility Insert with a Frontal Chip Splitter for External Rough Grooving and Side Turning

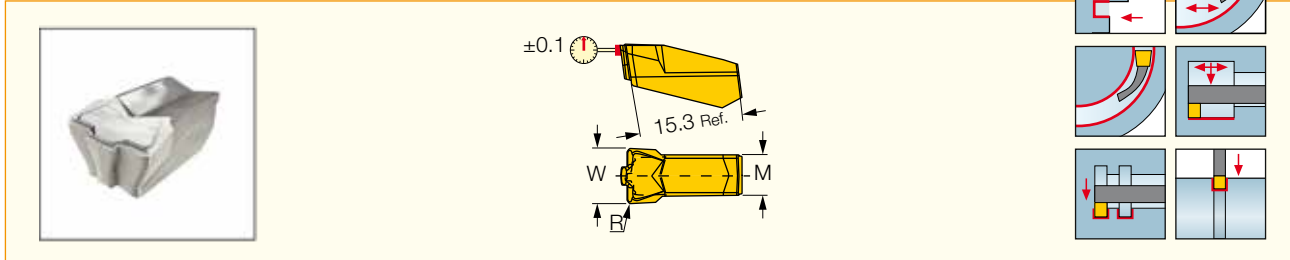


Designation	Dimensions			Tough ↔ Hard		Recommended Machining Data
	W ± 0.05	R ± 0.05	M	IC808	IC908	f face-groove (mm/rev)
GIMM 8CC	8.00	0.80	5.8	●	●	0.30-0.45

• For cutting speed recommendations, see pages 98-114.

For tools, see pages: CGFG 51-P8 (59).

GDMM-CC

Single-Ended Utility Insert for External Rough Grooving and Side Turning with a Frontal Chip Splitter

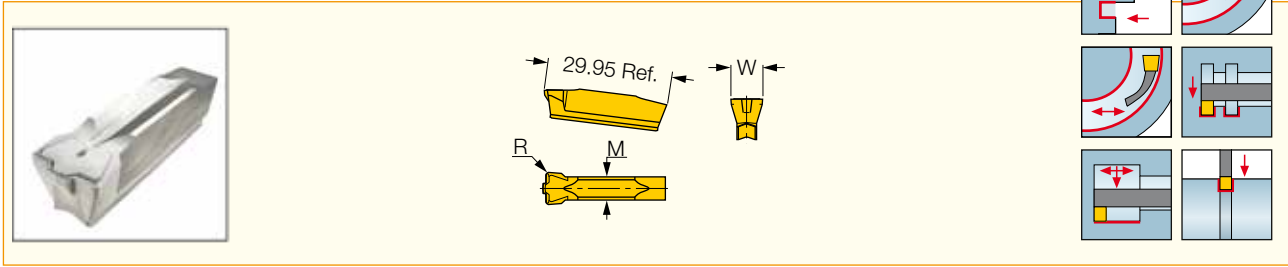


Designation	Dimensions			Tough ↔ Hard				Recommended Machining Data
	W±0.05	R±0.05	M	IC830	IC354	IC808	IC907	f face-groove (mm/rev)
GDMM 7CC	7.00	0.80	6.0	●	●	●	●	0.30-0.45
GDMM 8CC	8.00	0.80	5.6	●	●	●	●	0.30-0.45

• For cutting speed recommendations, see pages 98-114.

For tools, see pages: GAFG-R/L-8 (67) • GHFG-R/L-8 (62) • GHFGR/L-8 (63).

GIF

Precision Double-Ended Inserts for Grooving

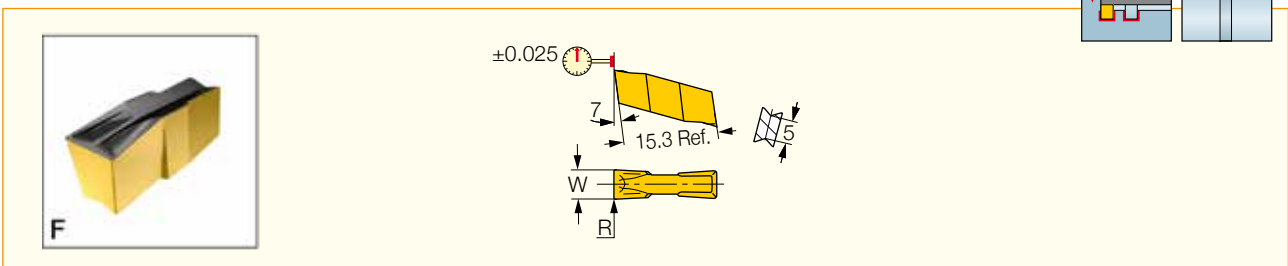


Designation	Dimensions				Tough ↔ Hard				Recommended Machining Data
	W±0.02	R±0.03	M	T _{max-r}	IC830	IC8250	IC808	IC20	f groove (mm/rev)
GIF 3.48-0.20	3.48	0.20	3.2	13.00	●	●	●	●	0.08-0.12
GIF 3.56-0.20	3.56	0.20	3.2	13.00	●	●	●	●	0.08-0.13
GIF 3.74-0.20	3.74	0.20	3.2	13.00	●	●	●	●	0.08-0.13
GIF 3.98-0.20	3.98	0.20	3.2	13.00	●	●	●	●	0.09-0.14
GIF 4.23-0.10	4.23	0.10	3.2	13.00	●	●	●	●	0.08-0.13
GIF 4.45-0.15	4.45	0.15	4.0	13.00	●	●	●	●	0.09-0.14
GIF 4.78-0.55	4.78	0.55	4.0	13.00	●	●	●	●	0.11-0.18
GIF 4.86-0.30	4.86	0.30	4.0	13.00	●	●	●	●	0.11-0.18
GIF 5.28-0.20	5.28	0.20	4.0	13.00	●	●	●	●	0.12-0.18
GIF 5.39-0.20	5.39	0.20	4.0	13.00	●	●	●	●	0.12-0.19
GIF 5.90-0.20	5.90	0.20	4.8	13.00	●	●	●	●	0.12-0.21
GIF 6.35-0.50	6.35	0.50	4.8	13.00	●	●	●	●	0.14-0.24
GIF 6.35-0.55	6.35	0.55	4.8	13.00	●	●	●	●	0.14-0.24

• Dmin for internal machining = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GHMPR/L (84) • GHMR/L (83).

GIA-K (W=3-6)

Flat Top Precision Double-Ended Inserts with T-Land for Machining Cast Iron

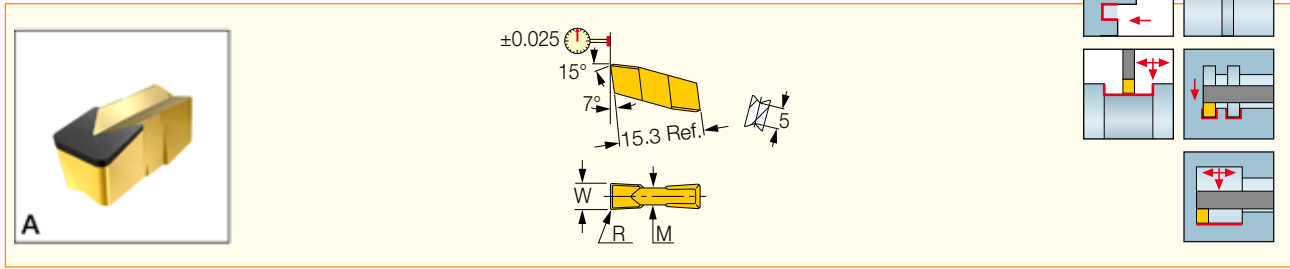


Designation	Dimensions				Tough ↔ Hard		Recommended Machining Data		
	W±0.02	R±0.05	M	T _{max-r}	IC428	IC5010	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIA 3.00K-0.40	3.00	0.40	2.4	13.00	●	●	0.50-1.80	0.12-0.20	0.07-0.13
GIA 4.00K-0.40	4.00	0.40	3.2	13.00	●	●	0.50-2.40	0.16-0.27	0.09-0.18
GIA 4.00K-0.80	4.00	0.80	3.2	13.00	●	●	1.00-2.40	0.18-0.32	0.09-0.19
GIA 5.00K-0.80	5.00	0.80	4.0	13.00	●	●	1.00-3.00	0.23-0.40	0.11-0.24
GIA 6.00K-0.80	6.00	0.80	4.8	13.00	●	●	1.00-3.60	0.27-0.48	0.14-0.29

• Dmin for internal machining = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GHMPR/L (84) • GHMR/L (83).

GITM

CBN Tipped Inserts for Turning and Grooving on Hard Ferrous Materials

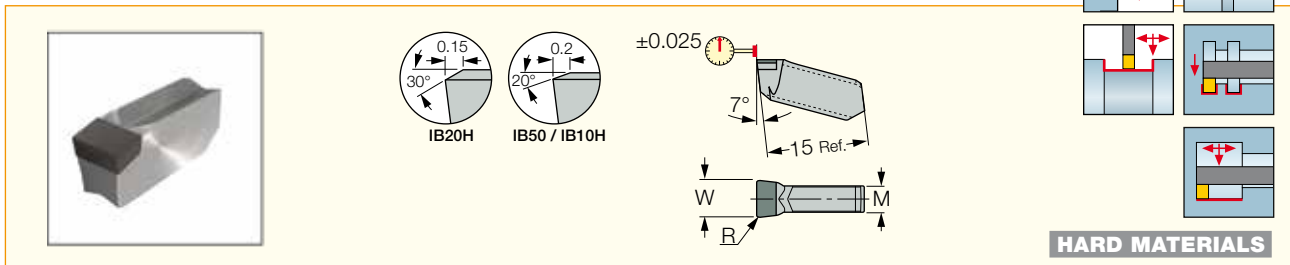


Designation	Dimensions			Tough ↔ Hard			Recommended Machining Data		
	W±0.02	R±0.05	M	IB20H	IB50	IB10H	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GITM 3.00K-0.20	3.00	0.20	2.4	●	●	●	0.00-0.30	0.02-0.07	0.02-0.05
GITM 4.00K-0.20	4.00	0.20	3.2	●	●	●	0.00-0.40	0.03-0.09	0.02-0.07
GITM 5.00K-0.40	5.00	0.40	4.0	●	●	●	0.00-0.50	0.05-0.13	0.03-0.10
GITM 6.00K-0.40	6.00	0.40	4.8	●	●	●	0.00-0.60	0.05-0.15	0.04-0.12
GITM 8.00K-0.40	8.00	0.40	6.0	●	●	●	0.00-0.80	0.07-0.20	0.05-0.16

• Dmin for internal machining = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GHMPR/L (84) • GHMR/L (83).

GITM (full radius)

CBN Tipped Inserts, Full Radius for Grooving and Turning on Hard Ferrous Materials

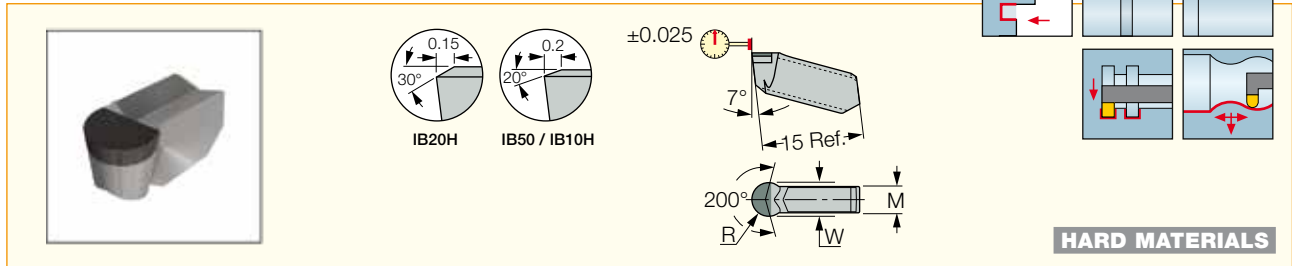

HARD MATERIALS


Designation	Dimensions				Tough ↔ Hard			Recommended Machining Data		
	W±0.02	R±0.05	M	D1 min	IB20H	IB50	IB10H	ap (mm)	f turn (mm/rev)	f groove (mm/rev)
GITM 3.00K-1.50	3.00	1.50	2.4	160.0	●	●	●	0.00-0.30	0.03-0.10	0.02-0.06
GITM 4.00K-2.00	4.00	2.00	3.2	160.0	●	●	●	0.00-0.40	0.04-0.14	0.02-0.09
GITM 5.00K-2.50	5.00	2.50	3.9	160.0	●	●	●	0.00-0.50	0.05-0.18	0.03-0.11
GITM 6.00K-3.00	6.00	3.00	5.0	160.0	●	●	●	0.00-0.60	0.06-0.22	0.04-0.13
GITM 8.00K-4.00	8.00	4.00	5.6	160.0	●	●	●	0.00-0.80	0.08-0.29	0.05-0.17

• Dmin for internal machining = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GHMPR/L (84) • GHMR/L (83).

GIPY

Single-Ended Full Radius Sharp Edged Precision Inserts for Profiling of High Temperature Alloys

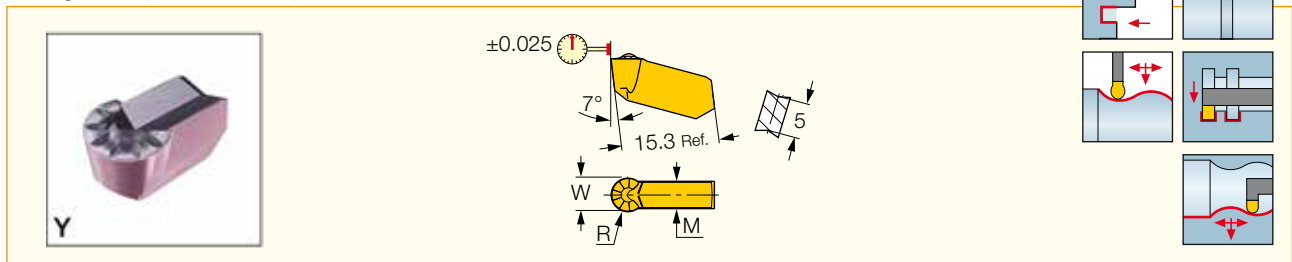


Designation	Dimensions			Tough ↔ Hard				Recommended Machining Data	
	W±0.02	R±0.05	M	IC07	IC806	IC907	IC20	f turn (mm/rev)	f groove (mm/rev)
GIPY 3.00-1.50	3.00	1.50	2.4	●	●	●	●	0.19-0.28	0.08-0.15
GIPY 4.00-2.00	4.00	2.00	3.2	●	●	●	●	0.22-0.37	0.10-0.20
GIPY 5.00-2.50	5.00	2.50	3.9	●	●	●	●	0.24-0.46	0.13-0.23
GIPY 6.00-3.00	6.00	3.00	5.0	●	●	●	●	0.26-0.55	0.15-0.27
GIPY 8.00-4.00	8.00	4.00	5.6	●	●	●	●	0.34-0.74	0.20-0.36

• Can cut arcs to 250° • Dmin for internal machining = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GHMPR/L (84) • GHMR/L (83).

GIPA (W=3-6)

Double-Ended Precision Ground Inserts with a Polished Top Rake, for Machining Aluminum

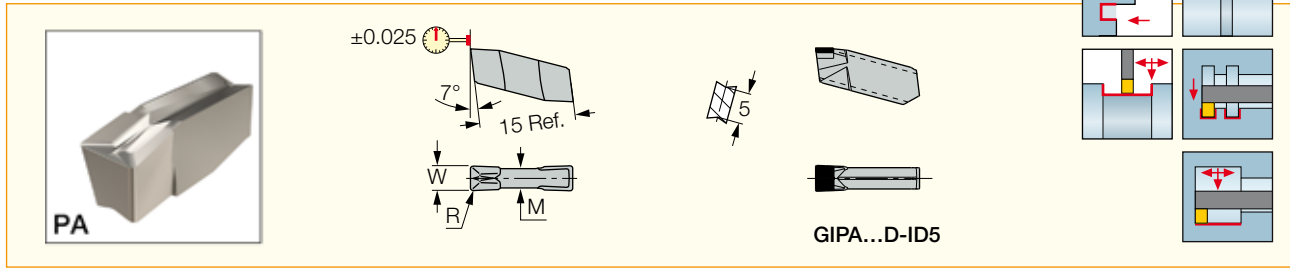

Designation	Dimensions			Tough ↔ Hard		Recommended Machining Data		
	W±0.02	R±0.03	M	IC20	ID5	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIPA 3.00-0.20	3.00	0.20	2.4	●		0.25-1.80	0.12-0.20	0.08-0.14
GIPA 3.00-0.20-D ⁽¹⁾	3.00	0.20	2.4		●	0.25-1.80	0.12-0.25	0.09-0.16
GIPA 4.00-0.40	4.00	0.40	3.2	●		0.50-2.40	0.14-0.31	0.10-0.20
GIPA 5.00-0.40	5.00	0.40	4.0	●		0.50-3.00	0.16-0.34	0.11-0.23
GIPA 6.00-0.40	6.00	0.40	4.8	●		0.50-3.60	0.19-0.41	0.11-0.26


• Dmin for internal machining = 70 mm • For cutting speed recommendations and user guide, see pages 98-114.

⁽¹⁾ Single-ended PCD tipped insert

For tools, see pages: GHMPR/L (84) • GHMR/L (83).

GDMA

Utility Double-Ended Insert with a Polished Top Rake, for Machining Aluminum

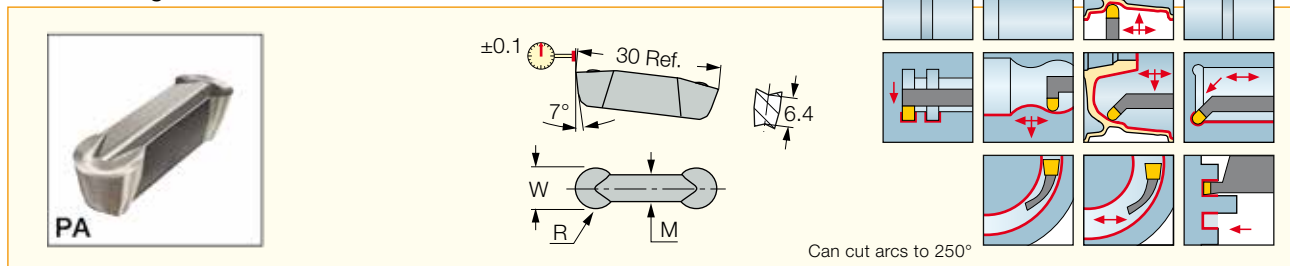


Designation	Dimensions			Tough ↔ Hard		Recommended Machining Data		
	W±0.05	R±0.05	M	IC07	IC507	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GDMA 840	8.00	4.00	5.6	●	●	0.00-4.00	0.24-0.67	0.14-0.38

For tools, see pages: GAFG-R/L-8 (67).

GIPA (full radius W=3-6)

Precision Double-Ended Inserts with Polished Top Rake, for Machining Aluminum

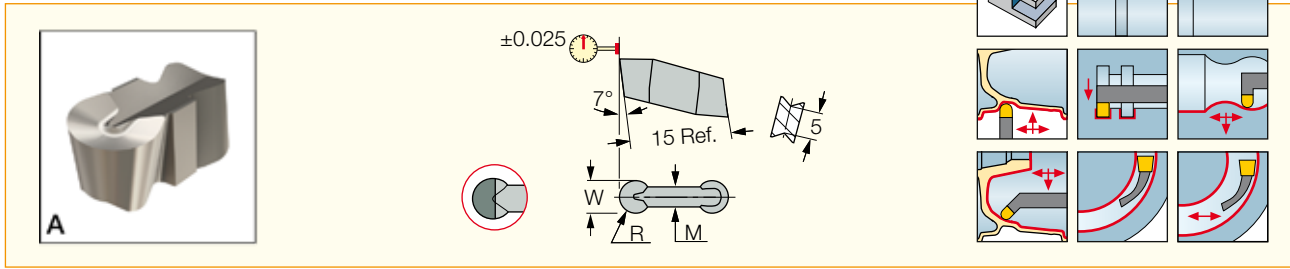

Designation	Dimensions			Tough ↔ Hard			Recommended Machining Data		
	W \pm 0.02	R \pm 0.05	M	IC806	IC20	ID5	a _p (mm)	f turn (mm/rev)	f groove (mm/rev)
GIPA 3.00-1.50	3.00	1.50	2.4		●		0.00-1.50	0.15-0.30	0.08-0.16
GIPA 3.00-1.50-D ⁽¹⁾	3.00	1.50	2.4			●	0.00-1.50	0.19-0.36	0.09-0.19
GIPA 3.00-1.50YZ-D ⁽²⁾	3.00	1.50	2.4			●	0.00-1.50	0.19-0.36	0.09-0.19
GIPA 4.00-2.00	4.00	2.00	3.2	●	●		0.00-2.00	0.20-0.43	0.10-0.22
GIPA 4.00-2.00-D ⁽¹⁾	4.00	2.00	3.2			●	0.00-2.00	0.25-0.53	0.12-0.26
GIPA 4.00-2.00YZ-D ⁽²⁾	4.00	2.00	3.2			●	0.00-2.00	0.25-0.53	0.12-0.26
GIPA 5.00-2.50	5.00	2.50	3.9	●	●		0.00-2.50	0.21-0.48	0.09-0.24
GIPA 5.00-2.50-D ⁽¹⁾	5.00	2.50	3.9			●	0.00-2.50	0.22-0.60	0.11-0.30
GIPA 5.00-2.50YZ-D ⁽²⁾	5.00	2.50	3.9			●	0.00-2.50	0.22-0.60	0.11-0.30
GIPA 6.00-3.00	6.00	3.00	4.8		●		0.00-3.00	0.21-0.58	0.11-0.29
GIPA 6.00-3.00-D ⁽¹⁾	6.00	3.00	4.8			●	0.00-3.00	0.26-0.72	0.13-0.36
GIPA 6.00-3.00YZ	6.00	3.00	4.8		●		0.00-3.00	0.21-0.58	0.11-0.29
GIPA 6.00-3.00YZ-D ⁽²⁾	6.00	3.00	4.8			●	0.00-3.00	0.26-0.72	0.13-0.36
GIPA 6.00-3.00CB ⁽³⁾	6.00	3.00	4.8			●	0.00-3.00	0.21-0.58	0.11-0.29

• For cutting speed recommendations and user guide, see pages 98-114.


⁽¹⁾ Single-ended PCD tipped insert ⁽²⁾ Single-ended molded PCD chipformer tipped insert ⁽³⁾ Single-ended flat PCD tipped insert with chip deflector

For tools, see pages: GHMPR/L (84) • GHMR/L (83) .



GIPA/GIDA 8 (full radius)

Precision Double-Ended Inserts with Polished Top Rake, for Machining Aluminum

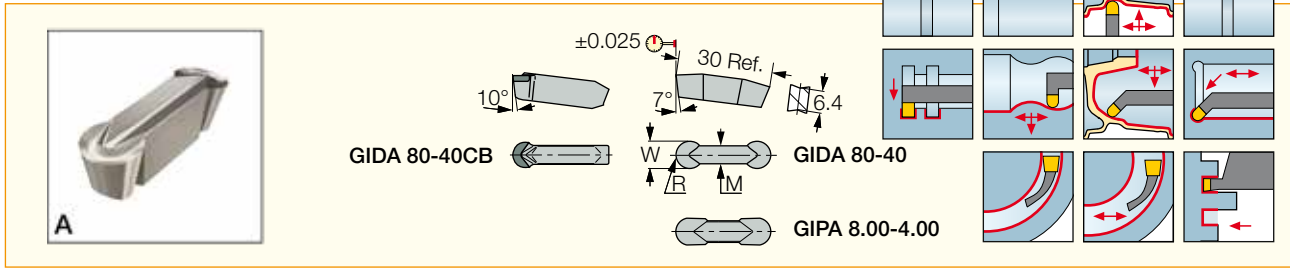


Designation	Dimensions			Tough ↔ Hard		Recommended Machining Data		
	W±0.02	R±0.05	M	IC20	ID5	a _D (mm)	f turn (mm/rev)	f groove (mm/rev)
GIDA 80-40	8.00	4.00	5.6	●		0.00-4.00	0.24-0.67	0.14-0.38
GIDA 80-40-D	8.00	4.00	5.6		●	0.00-4.00	0.24-0.67	0.14-0.38
GIDA 80-40CB-D (1)	8.00	4.00	5.6		●	0.00-4.00	0.24-0.67	0.14-0.38
GIDA 80-40YZ	8.00	4.00	5.6	●		0.00-4.00	0.24-0.67	0.14-0.38
GIDA 80-40YZ-D	8.00	4.00	5.6		●	0.00-4.00	0.35-0.96	0.18-0.48
GIPA 8.00-4.00	8.00	4.00	6.0			0.00-4.00	0.24-0.67	0.14-0.38

• ID5 is a single-ended PCD tipped insert • For cutting speed recommendations and user guide, see pages 98-114.



(1) Should not be clamped on tools with "A" suffix

For tools, see pages: GAFG-R/L-8 (67) • GHFGR/L-8 (63).

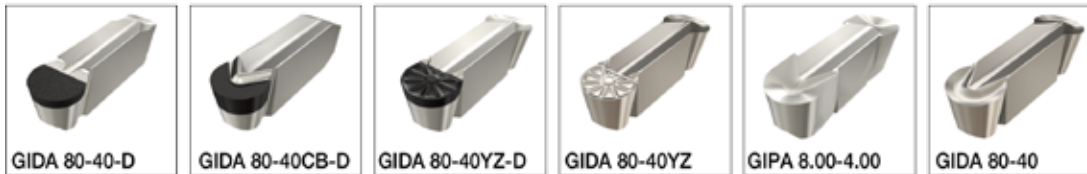

GHMUR/L

External Holders for 45° Undercutting

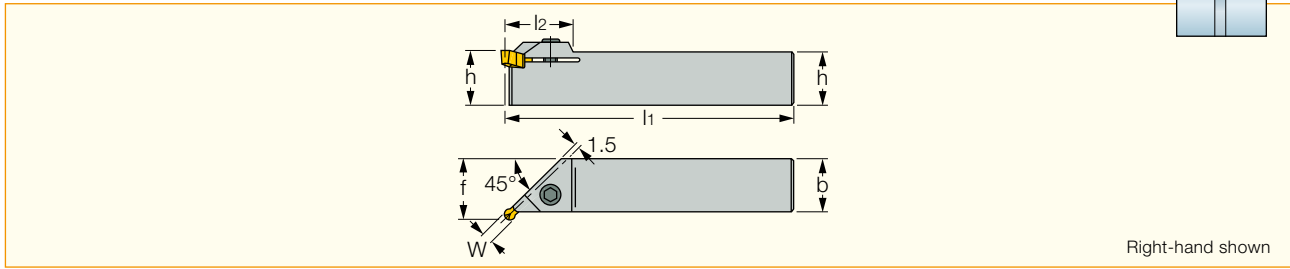

Designation	W_{max}	h	b	l_1	l_2	f
GHMUR/L 16	4.80	16.0	16.0	112.00	25.0	19.0
GHMUR/L 20	6.40	20.0	20.0	122.00	25.0	23.0
GHMUR/L 25	6.40	25.0	25.0	137.00	25.0	28.0

• For $D > 100$ mm, GIP/GIF inserts can be used (clearance types UN, D or G are not required).

For inserts, see pages: GIMY-UN (82) • GIP-UN (83).



Spare Parts



Designation	Screw	Key
GHMUR/L 16	SR M6X16DIN912 12.9	HW 5.0
GHMUR/L 20	SR M6X20DIN912 12.9	HW 5.0
GHMUR/L 25	SR M6X25DIN912 12.9 U	HW 5.0

GIMY-UN

Utility Single-Ended Inserts for External Undercutting

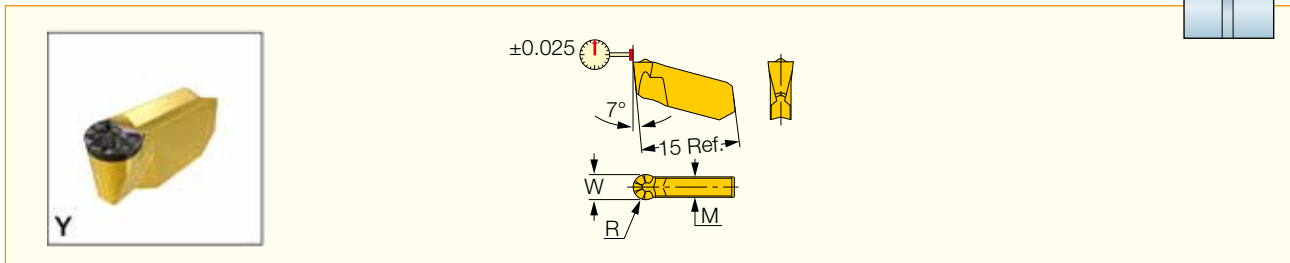



Designation	Dimensions				IC8250	Recommended Machining Data
	$W_{\pm 0.05}$	$R_{\pm 0.05}$	M	T_{max-r}		f groove (mm/rev)
GIMY 315-UN	3.00	1.50	2.4	2.00	●	0.05-0.15
GIMY 420-UN	4.00	2.00	3.2	2.50	●	0.05-0.15

• For 45° undercutting on $D 100$ mm, regular GIMY inserts may be used. • For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GHMUR/L (82).

GIP-UN

Precision Double-Ended Inserts for External Undercutting

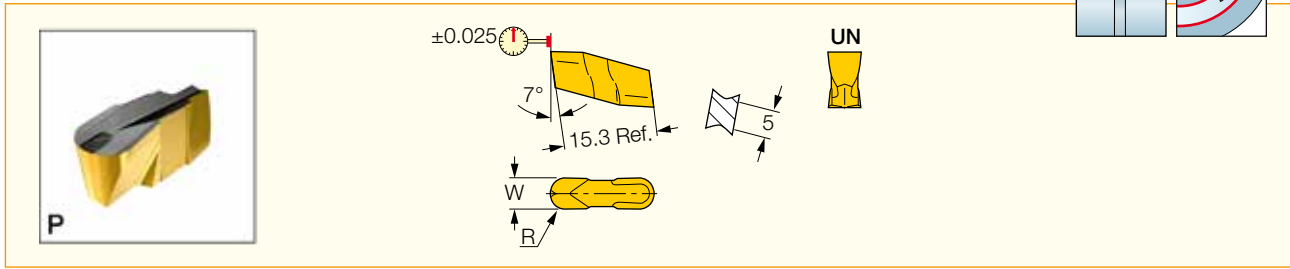



Designation	Dimensions					Tough ↔ Hard				Recommended Machining Data f groove (mm/rev)
	W±0.05	R±0.05	D _{min}	M	T _{max-r}	IC830	IC8250	IC808	IC20	
GIP 3.00-1.50UN	3.00	1.50	35.00	2.4	4.00	●	●	●	●	0.05-0.15
GIP 4.00-2.00UN	4.00	2.00	35.00	3.2	4.00	●	●	●	●	0.05-0.15

- Not recommended for turning. • For undercutting at 45° and D100 mm, other GIP inserts apply as well.
- For cutting speed recommendations and user guide, see pages 98-114.

For tools, see pages: GHMPR/L (84) • GHMR/L (83) • GHMR/L (82).

GHMR/L

Toolholders for Shallow Radial and Axial Grooving with Narrow and Special Profile Inserts

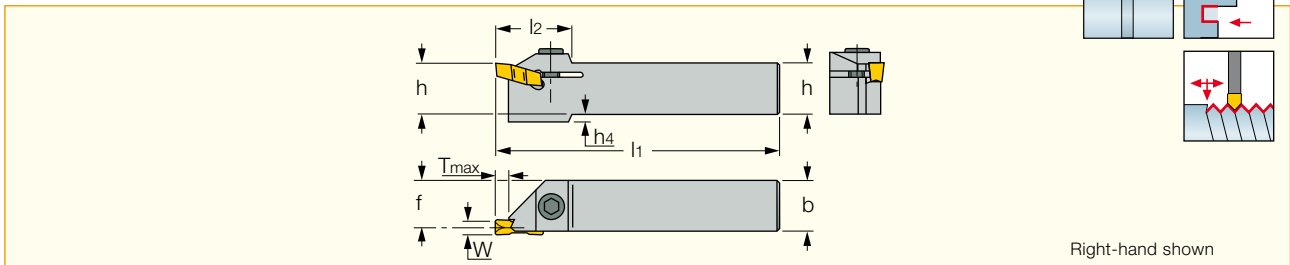

Designation	W _{max}	T _{max-r}	T _{max-a}	h	b	l ₁	l ₂	f	h ₄
GHMR/L 12	4.00	4.80	4.80	12.0	12.0	110.00	25.0	10.8	4.0
GHMR/L 16	4.80	4.80	4.80	16.0	16.0	115.00	25.0	14.5	-
GHMR 16-3 ST ⁽¹⁾	5.00	4.80	4.80	16.0	16.0	78.00	25.0	15.0	-
GHMR/L 20	6.40	4.80	4.80	20.0	20.0	125.00	25.0	18.5	-
GHMR/L 25	6.40	4.80	4.80	25.0	25.0	140.00	25.0	23.5	-
GHMR/L 32	6.40	4.80	4.80	32.0	32.0	150.00	25.0	30.2	-

- Use for recessing: light turning, small depth of cut (ap=0.1-0.5 mm) and small feed (f=0.1 mm/rev). • For user guide, see pages 98-114.

⁽¹⁾ For Star and multi-spindle machines.

For inserts, see pages: GIA-K (W=3-6) (77) • GIF (76) • GIMF (68) • GIMY (69) • GIMY (full radius) (70) • GIMY-F (74) • GIP-UN (83) • GIPA (full radius W=3-6) (80) • GIPA (W=3-6) (79) • GIPY (78) • GITM (77) • GITM (full radius) (78).


Spare Parts



Designation	Screw	Key	Screw 1	Key 1
GHMR/L 12	SR 76-1022	T-20/5		
GHMR/L 16			SR M6X16DIN912 12.9	HW 5.0
GHMR 16-3 ST			SR M6X16DIN912 12.9	HW 5.0
GHMR/L 20			SR M6X20DIN912 12.9	HW 5.0
GHMR/L 25			SR M6X25DIN912 12.9 U	HW 5.0
GHMR/L 32			SR M6X25DIN912 12.9 U	HW 5.0

GHMPR/L

Perpendicular Toolholders for Shallow Radial and Axial Grooving with Narrow and Special Profile Inserts

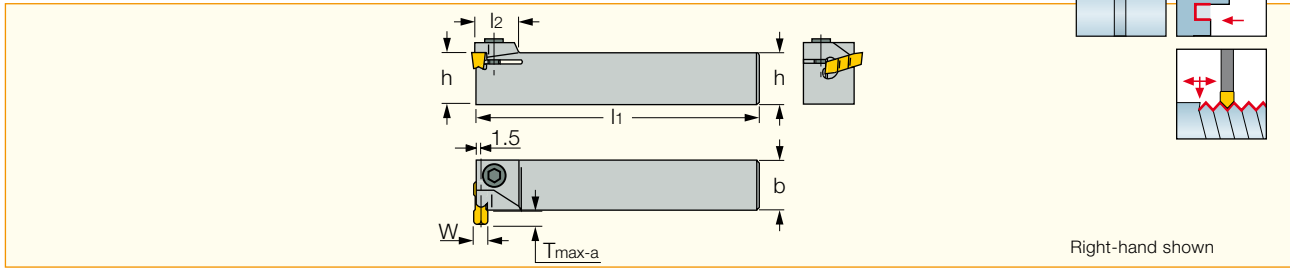

Designation	W _{max}	T _{max-r}	T _{max-a}	h	b	l ₁	l ₂
GHMPR/L 16	4.80	4.80	4.80	16.0	16.0	110.00	17.0
GHMPR/L 20	6.40	4.80	4.80	20.0	20.0	120.00	17.0
GHMPR/L 25	6.40	4.80	4.80	25.0	25.0	135.00	17.0

- Use for recessing: light turning, small depth of cut (ap=0.1-0.5 mm) and small feed (f=0.1 mm/rev).
- For user guide, see pages 98-114.
- For inserts, see pages: GIA-K (W=3-6) (77) • GIF (76) • GIMF (68) • GIMY (69) • GIMY (full radius) (70) • GIMY-F (74) • GIPA (full radius W=3-6) (80) • GIPA (W=3-6) (79) • GIPY (78) • GITM (77) • GITM (full radius) (78) • GIP-UN (83).


Spare Parts



Designation	Screw	Key
GHMPR/L 16	SR M6X16DIN912 12.9	HW 5.0
GHMPR/L 20	SR M6X20DIN912 12.9	HW 5.0
GHMPR/L 25	SR M6X25DIN912 12.9 U	HW 5.0

HLPGR/L

Tools for L-Type LPGIR/L Inserts

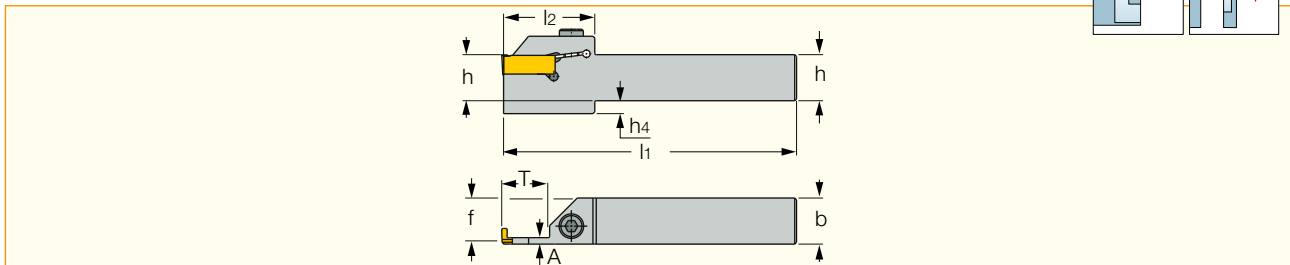

Designation	T _{max-r}	h	h ₁	h ₄	b	A	f	l ₁	l ₂
HLPGR/L 2525-12-A3.5-T25	25.00	25.0	25.0	7.0	25.0	3.50	23.3	160.00	50.0
HLPGR/L 3225-12-A3.5-T25	25.00	32.0	32.0	-	25.0	3.50	23.3	160.00	50.0
HLPGR/L 2525-12-A4.5-T30	30.00	25.0	25.0	7.0	25.0	4.50	22.8	160.00	55.0
HLPGR/L 3225-12-A4.5-T30	30.00	32.0	32.0	-	25.0	4.50	22.8	160.00	55.0

- In case of face penetration prior to radial grooving, please check that the lower insert support is relieved from the groove's outer diameter.

For inserts, see pages: LPGIR (85).



Spare Parts



Designation	Screw	Key
HLPGR/L	SR M6X20DIN912 12.9	HW 5.0

LPGIR

Inserts for Axial Grooves Inside Radial Grooves and for Radial Grooves Inside Axial Grooves




Designation	Dimensions							IC907
	W	R	M	T _{max-a}	L ₃	a	D _{1 min}	
LPGIL 12-8-2T4PR	2.00	0.20	4.0	4.00	30.00	8.00	200.0	●
LPGIR 12-8-2T4PR	2.00	0.20	4.0	4.00	30.00	8.00	200.0	●
LPGIL 12-8.5-3T5PR	3.00	0.30	3.5	5.00	30.00	8.50	200.0	●
LPGIR 12-8.5-3T5PR	3.00	0.30	3.5	5.00	30.00	8.50	200.0	●
LPGIL 12-9.5-4T6PR	4.00	0.40	3.5	6.00	30.00	9.50	200.0	●
LPGIR 12-9.5-4T6PR	4.00	0.40	3.5	6.00	30.00	9.50	200.0	●
LPGIL 12-11-5T6.5PR	5.00	0.40	4.5	6.50	30.00	11.00	200.0	●
LPGIR 12-11-5T6.5PR	5.00	0.40	4.5	6.50	30.00	11.00	200.0	●

• For cutting speed recommendations and user guide, see pages 98-114

For tools, see pages: HLPGR/L (84).



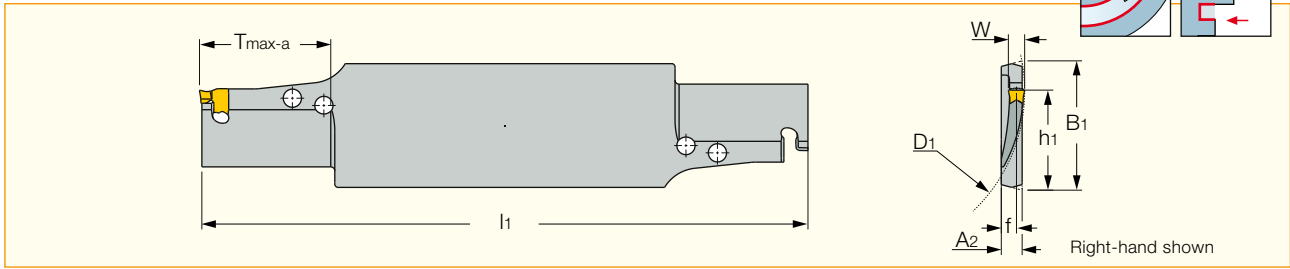

Designation	W	D1 min ⁽¹⁾	D1 max ⁽²⁾	T _{max-a}	h ₁	B ₁	f	A ₂	l ₁
TNFFH 65R/L-3IQ	3.00	65.0	90.0	18.00	24.8	32.0	4.1	5.2	150.00
TNFFH 90R/L-3IQ	3.00	90.0	120.0	18.00	24.8	32.0	4.1	5.2	150.00
TNFFH 120R/L-3IQ	3.00	120.0	160.0	24.00	24.8	32.0	4.1	5.2	150.00
TNFFH 80R/L-4IQ	4.00	80.0	150.0	32.00	24.8	32.0	3.8	5.2	150.00
TNFFH 150R/L-4IQ	4.00	150.0	500.0	32.00	24.8	32.0	3.8	5.2	150.00
TNFFH 80R/L-5IQ	5.00	80.0	150.0	30.00	24.8	32.0	3.5	5.2	150.00
TNFFH 150R/L-5IQ	5.00	150.0	500.0	35.00	24.8	32.0	3.5	5.2	150.00
TNFFH 80R/L-6IQ	6.00	80.0	150.0	30.00	24.8	32.0	3.3	5.2	150.00
TNFFH 150R/L-6IQ	6.00	150.0	700.0	35.00	24.8	32.0	3.3	5.2	150.00

• B1 dimension links blades and blocks

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: TNF-M-IQ (89) • TNF-P-IQ (88).

For holders, see pages: C#-TBK-R/L (59) • HSK A-WH-TBK-R/L (60) • IM63 XMZ TBK (60) • SGTBF (61) • SGTBK (59)

• SGTBU/SGTBN (58) • UBHCR/L (61).





Spare Parts



Designation	Extractor
TNFFH-IQ	ETF 3-6*

* Optional, should be ordered separately



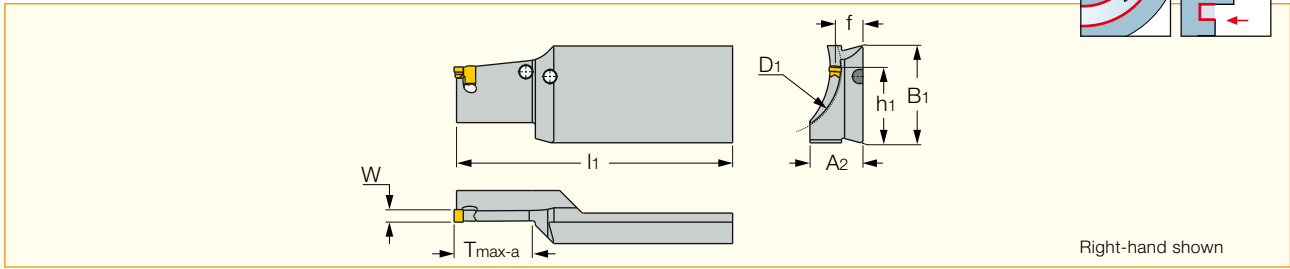

Designation	W	D1 min ⁽¹⁾	D1 max ⁽²⁾	T _{max-a}	B1	f	h1	l1	A2
TNFFA 30R/L-3IQ	3.00	30.0	35.0	19.00	32.0	9.5	24.8	90.00	18.5
TNFFA 35R/L-3IQ	3.00	35.0	40.0	19.00	32.0	9.5	24.8	90.00	18.5
TNFFA 40R/L-3IQ	3.00	40.0	46.0	23.00	32.0	9.5	24.8	90.00	18.5
TNFFA 46R/L-3IQ	3.00	46.0	54.0	25.00	32.0	9.5	24.8	90.00	18.5
TNFFA 54R/L-3IQ	3.00	54.0	65.0	26.00	32.0	9.5	24.8	90.00	18.5
TNFFA 65R/L-3IQ	3.00	65.0	80.0	27.00	32.0	9.5	24.8	90.00	18.5
TNFFA 80R/L-3IQ	3.00	80.0	100.0	27.00	32.0	9.5	24.8	90.00	16.7
TNFFA 35R/L-4IQ	4.00	35.0	45.0	25.00	32.0	9.0	24.8	90.00	18.1
TNFFA 45R/L-4IQ	4.00	45.0	60.0	25.00	32.0	9.0	24.8	90.00	17.3
TNFFA 60R/L-4IQ	4.00	60.0	80.0	27.00	32.0	9.0	24.8	90.00	18.0
TNFFA 80R/L-4IQ	4.00	80.0	130.0	27.00	32.0	9.0	24.8	90.00	14.8
TNFFA 40R/L-5IQ	5.00	45.0	50.0	25.00	32.0	9.7	24.8	90.00	18.0
TNFFA 50R/L-5IQ	5.00	60.0	70.0	28.00	32.0	9.7	24.8	90.00	18.0
TNFFA 70R/L-5IQ	5.00	80.0	100.0	30.00	32.0	9.7	24.8	90.00	18.0
TNFFA 100R/L-5IQ	5.00	100.0	180.0	35.00	32.0	9.7	24.8	90.00	18.0
TNFFA 45R/L-6IQ	6.00	45.0	60.0	25.00	32.0	10.2	24.8	90.00	18.0
TNFFA 60R/L-6IQ	6.00	60.0	80.0	28.00	32.0	10.2	24.8	90.00	18.0
TNFFA 80R/L-6IQ	6.00	75.0	110.0	30.00	32.0	10.2	24.8	90.00	18.0
TNFFA 110R/L-6IQ	6.00	100.0	300.0	35.00	32.0	10.2	24.8	90.00	18.0

• For user guide, see pages 98-114

⁽¹⁾ Minimum penetration diameter ⁽²⁾ Maximum penetration diameter

For inserts, see pages: TNF-M-IQ (89) • TNF-P-IQ (88).

For holders, see pages: C#-TBK-R/L (59) • HSK A-WH-TBK-R/L (60) • IM63 XMZ TBK (60) • SGTBK (59) • SGTBU/SGTBN (58) • UBHCR/L (61).



Spare Parts



Designation	Extractor
TNFFA-IQ	ETF 3-6*

* Optional, should be ordered separately



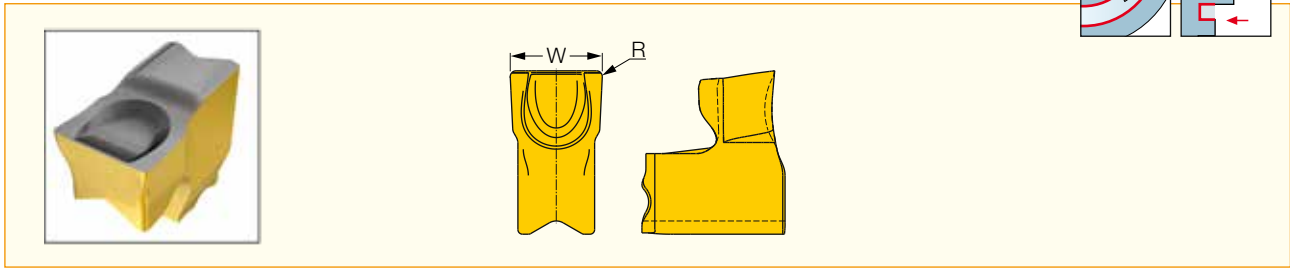

Designation	Dimensions		IC808	Recommended Machining Data
	W±0.05	R		f face-groove (mm/rev)
TNF 3P-IQ	3.00	0.30	●	0.10-0.15
TNF 4P-IQ	4.00	0.25	●	0.10-0.15
TNF 5P-IQ	5.00	0.35	●	0.12-0.20
TNF 6P-IQ	6.00	0.35	●	0.12-0.20

• For user guide, see pages 98-114

For tools, see pages: TNFFA-IQ (87) • TNFFH-IQ (86).

Workpiece Material: SAE 4340 Alloy Steel



T = 13 mm

D = 80-130 mm

TNF 4P-IQ

f mm/rev Vc m/min	0.08	0.12	0.15
80			
100			
120			

Face Grooving Single-Ended Inserts for Machining Stainless Steel and High Temperature Alloys



Designation	Dimensions		IC808	Recommended Machining Data
	W \pm 0.05	R		f face-groove (mm/rev)
TNF 3M-IQ	3.00	0.30	●	0.08-0.10
TNF 4M-IQ	4.00	0.25	●	0.08-0.12
TNF 5M-IQ	5.00	0.35	●	0.12-0.20
TNF 6M-IQ	6.00	0.35	●	0.12-0.20

• For user guide, see pages 98-114.

For tools, see pages: TNFFA-IQ (87) • TNFFH-IQ (86).

Workpiece material: 316L Stainless Steel

T = 13 mm



D = 80-130 mm

TNF 4M-IQ

f mm/rev \ Vc m/min	0.08	0.10
80		
100		

PENTA 34F-R/L


Pentagonal Inserts for Face Grooving and Recessing

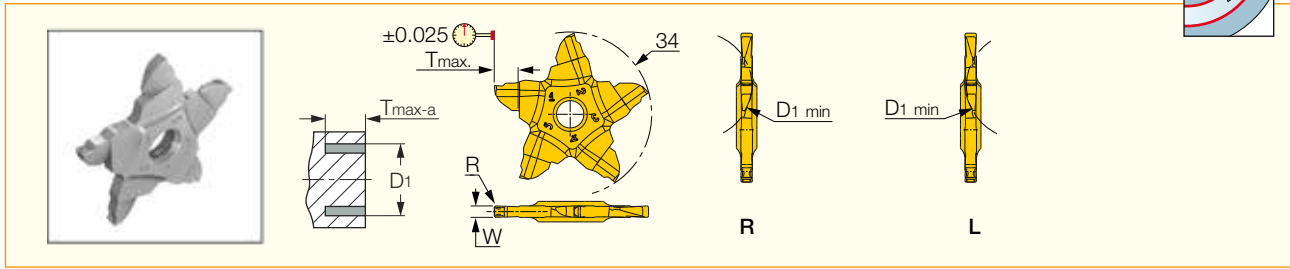

Designation	Dimensions				IC908	Recommended Machining Data
	W	R	T _{max-a}	D _{1 min}		f face-groove (mm/rev)
PENTA 34F239-0.15-22R/L	2.39	0.15	5.00	22.0	●	0.08-0.12
PENTA 34F247-0.20-22R/L	2.47	0.20	5.00	22.0	●	0.08-0.12
PENTA 34F300-0.40-22R/L	3.00	0.40	5.00	22.0	●	0.08-0.15
PENTA 34F400-0.40-22R/L	4.00	0.40	5.00	22.0	●	0.08-0.15


• For cutting speed recommendations, see pages 98-114.

For tools, see pages: PCADR/L 34N-RE (93) • PCHBR/L (92) • PCHPR/L (91) • PCHR/L-34 (91).

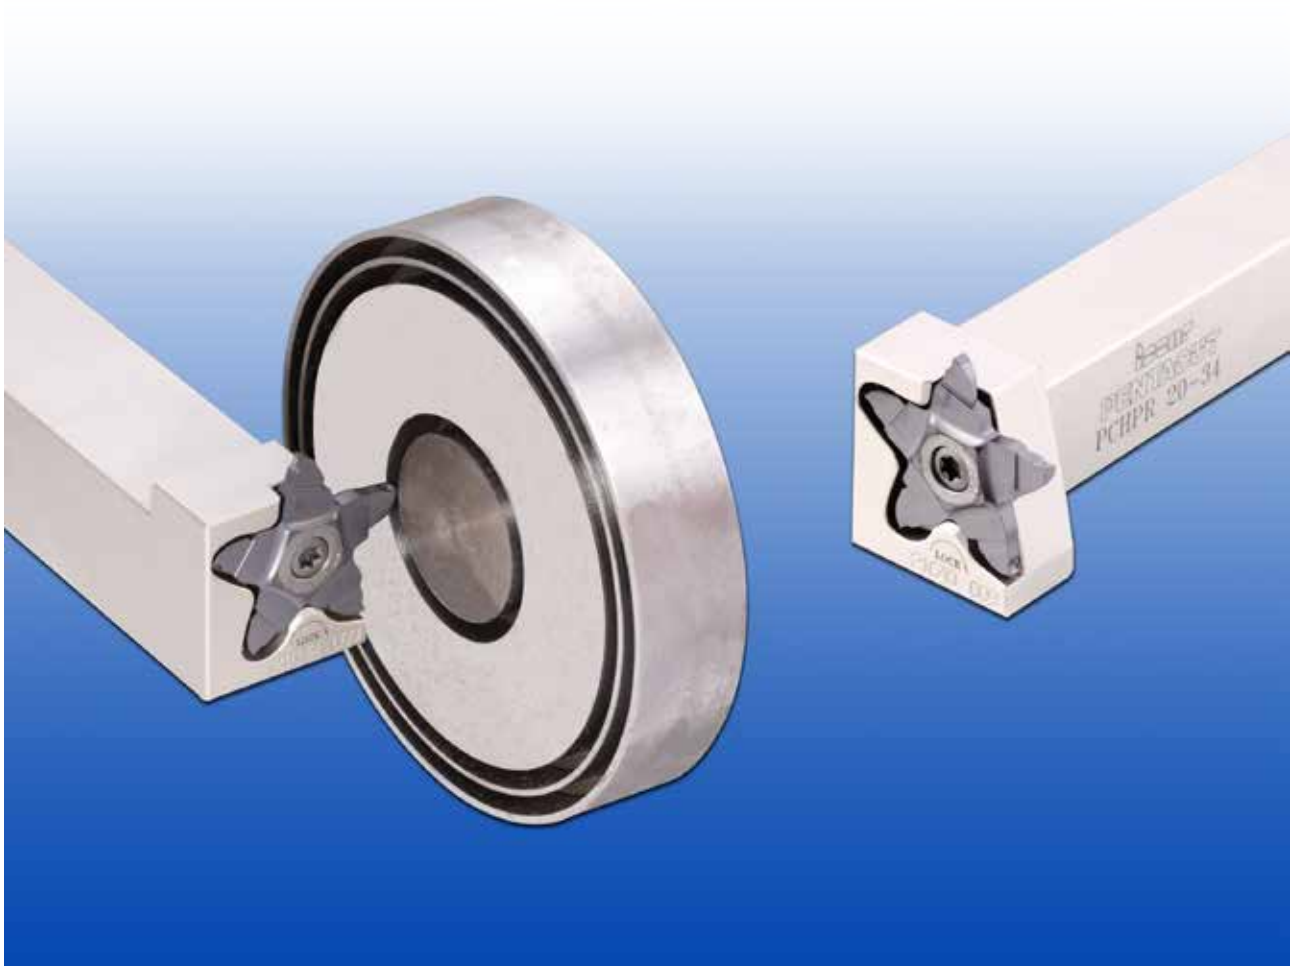

PCHPR/L

Facing, Grooving, Parting and Recessing Perpendicular Holders for Inserts with 5 Cutting Edges

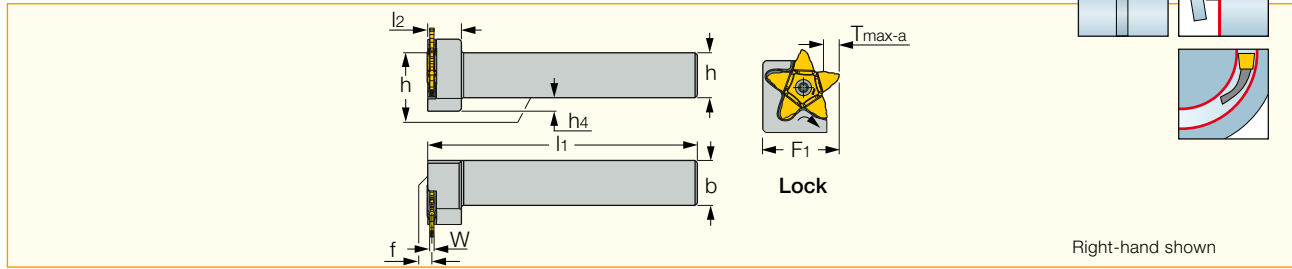

Designation	h	b	W _{min}	W _{max}	f	F ₁	l ₁	l ₂	h ₄	T _{max-a} ⁽¹⁾
PCHPR/L 16-24	16.0	16.0	0.50	3.20 ⁽²⁾	1.5 ⁽³⁾	23.5	120.00	11.5	-	6.50
PCHPR/L 20-24	20.0	20.0	0.50	3.20 ⁽²⁾	1.5 ⁽³⁾	28.0	120.00	11.5	-	6.50
PCHPR/L 25-24	25.0	25.0	0.50	3.20 ⁽²⁾	1.5 ⁽³⁾	33.0	135.00	11.5	-	6.50
PCHPR/L 20-34	20.0	20.0	1.40	4.00	1.9	34.0	120.00	15.0	6.0	10.00
PCHPR/L 25-34	25.0	25.0	1.40	4.00	1.9	34.0	135.00	15.0	-	10.00

⁽¹⁾ For specific information, refer to insert data. ⁽²⁾ Up to 6.2 mm width may be ordered on request. ⁽³⁾ Valid for inserts with W<3.2 mm

For inserts, see pages: PENTA 34F-R/L (90).


Spare Parts



Designation	Screw	Key
PCHPL 16-24	SR 16-212-01397	T-20/5
PCHPR 16-24	SR 16-212-01397L	T-20/5
PCHPL 20-24	SR 16-212-01397	T-20/5
PCHPR 20-24	SR 16-212-01397L	T-20/5
PCHPL 25-24	SR 16-212-01397	T-20/5
PCHPR 25-24	SR 16-212-01397L	T-20/5
PCHPR/L 20-34	SR 16-212-01397	T-20/5
PCHPR/L 25-34	SR 16-212-01397	T-20/5

PCHR/L-34

Grooving, Parting and Recessing Holders for Inserts with 5 Cutting Edges

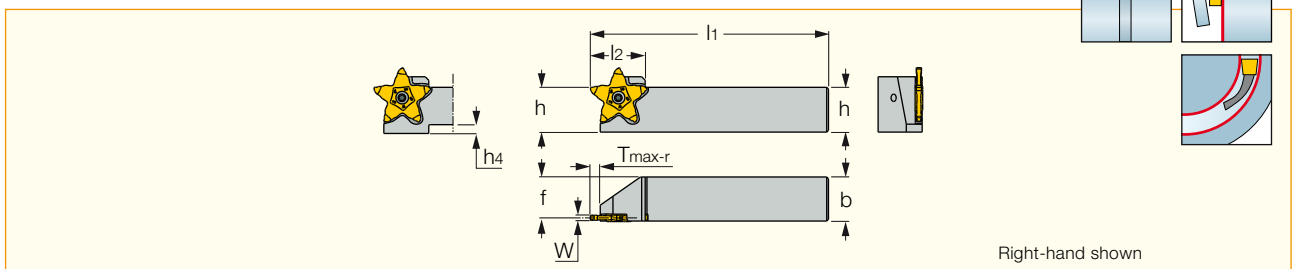

Designation	h	b	W _{min}	W _{max}	f	T _{max-r} ⁽²⁾	l ₁	l ₂	h ₄
PCHR/L 16-34	16.0	16.0	1.50	4.00	14.2	10.00	120.00	31.0	9.0
PCHR/L 20-34	20.0	20.0	1.50	4.00	18.2	10.00	120.00	31.0	6.0
PCHR/L 25-34	25.0	25.0	1.50	4.00	23.2	10.00	135.00	31.0	-
PCHR/L 25-34-8 ⁽¹⁾	25.0	25.0	3.19	8.20	22.5	10.00	135.00	31.0	-
PCHR/L 32-34	32.0	32.0	1.50	4.00	30.1	10.00	135.00	31.0	-

⁽¹⁾ Used with special inserts only ⁽²⁾ For specific information, refer to insert data.

For inserts, see pages: PENTA 34F-R/L (90).


Spare Parts



Designation	Screw 1	Key 1
PCHR/L 16-34	SR 16-212-01397	T-2010/5
PCHR/L 20-34	SR 16-212-01397	T-2010/5
PCHR/L 25-34	SR 16-212-01397	T-2010/5
PCHR/L 25-34-8	SR PCHR-8-06642	T-15/5
PCHR/L 32-34	SR 16-212-01397	T-2010/5

PCHBR/L

Double-Ended Parting and Grooving Blades for PENTACUT Inserts

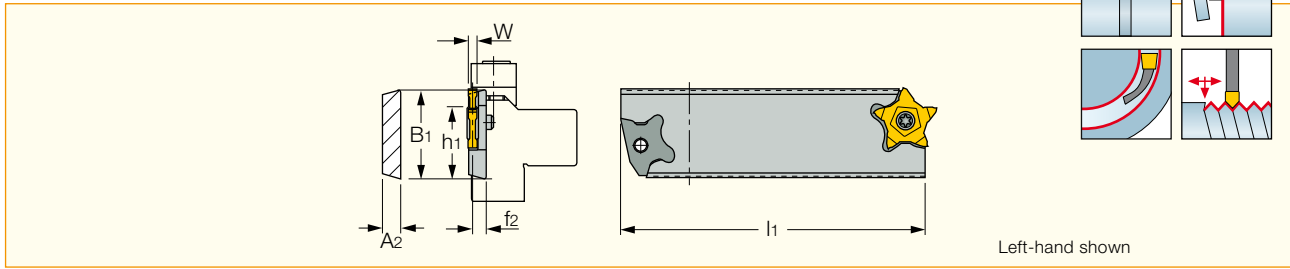

Left-hand shown

Designation	B ₁	W _{min}	W _{max}	h ₁	f ₂ ⁽²⁾	l ₁	A ₂	Insert
PCHBR/L 26-24R ⁽¹⁾	26.0	0.50	6.20	21.4	7.00	110.00	8.5	PENTA 24
PCHBR 26-24L ⁽¹⁾	26.0	0.50	6.20	21.4	7.00	110.00	8.5	PENTA 24
PCHBL 32-24R	32.0	0.50	6.20	24.8	7.00	110.00	8.5	PENTA 24
PCHBR 32-24L	32.0	0.50	6.20	24.8	7.00	110.00	8.5	PENTA 24
PCHBR/L 26-34R ⁽¹⁾	26.0	1.50	4.00	21.4	7.15	110.00	8.5	PENTA 34
PCHBR 26-34L ⁽¹⁾	26.0	1.50	4.00	21.4	7.15	110.00	8.5	PENTA 34
PCHBL 32-34R	32.0	1.50	4.00	24.8	7.15	110.00	8.5	PENTA 34
PCHBR 32-34L	32.0	1.50	4.00	24.8	7.15	110.00	8.5	PENTA 34

• For insert/blade orientation, see the following drawings

⁽¹⁾ Single pocket blade ⁽²⁾ To the center of inserts up to 4.15 mm width




For inserts, see pages: PENTA 34F-R/L (90).

For holders, see pages: C#-TBK-R/L (59) • HSK A-WH-TBK-R/L (60) • IM63 XMZ TBK (60) • SGTBK (59) • SGTBU/SGTBN (58).

Spare Parts




Designation	Screw	Key
PCHBR/L 26-24R	SR 16-212-01397L	T-2010/5
PCHBR 26-24L	SR 16-212-01397	
PCHBL 32-24R	SR 16-212-01397L	T-2010/5
PCHBR 32-24L	SR 16-212-01397	T-2010/5
PCHBR/L 26-34R	SR 16-212-01397	T-2010/5
PCHBL 32-34R	SR 16-212-01397	T-2010/5
PCHBR 32-34L	SR 16-212-01397	T-2010/5

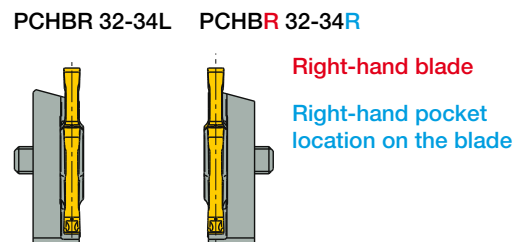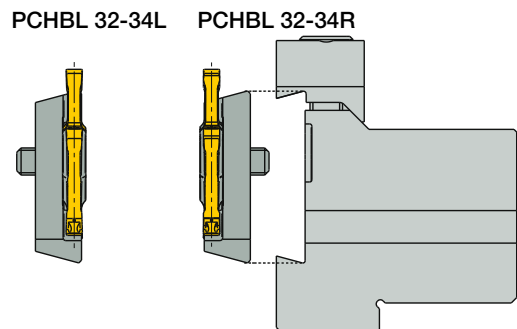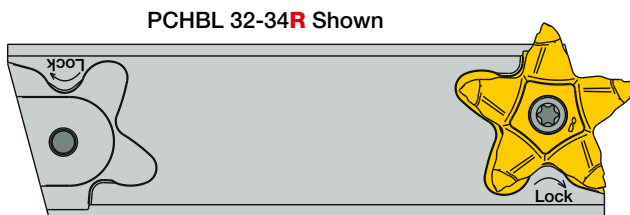

PCADR/L 34N-RE

Reinforced Adapters for PENTACUT Grooving Inserts

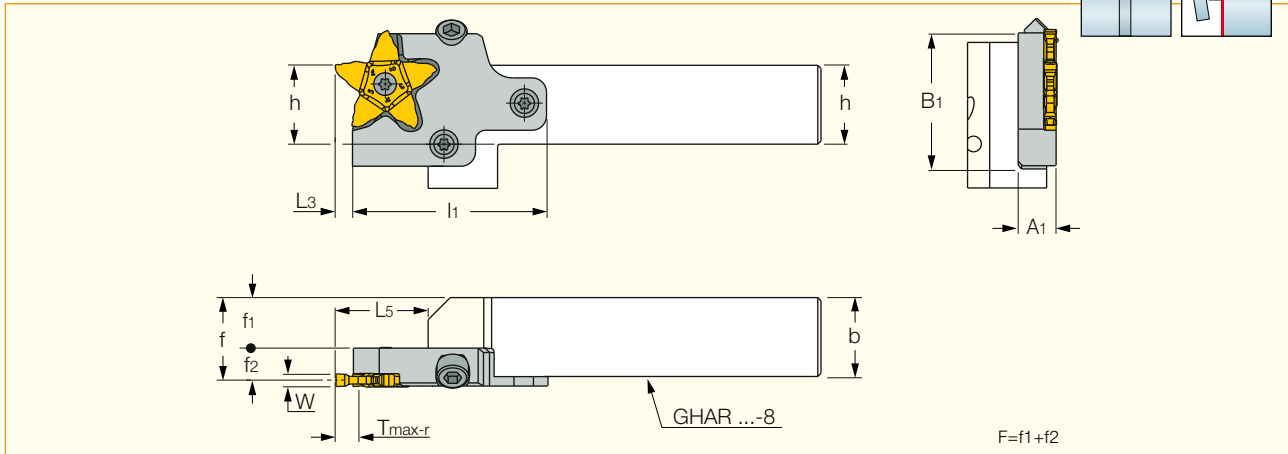

Designation	W _{min}	W _{max}	L ₃	L ₅	l ₁	f ₂	B ₁	A ₁
PCADR/L 34N-RE	1.50	4.00	5.50	29.50	61.50	10.15	42.0	12.00

• Tmax and Dmax according to insert limitation • h, b, and f1 according to holder being used

For inserts, see pages: PENTA 34F-R/L (90).

For holders, see pages: C#-GHAD-8 (65) • C#-GHAPR/L-8 (65) • GHAPR/L-8 (64) • GHAR/L-8 (64) • IM-GHAD-8 (66) • IM-GHAPR/L-8 (66).

Spare Parts



Designation	Screw	Key
PCADR/L 34N-RE	SR 16-212-01397	T-2010/5





PENTACUT

PENTACUT

PENTA 34F-RS/LS

Pentagonal Inserts for Face Grooving and Recessing Along Shafts, up to 5 mm Depth of Cut at a Minimum of 22 mm Diameter

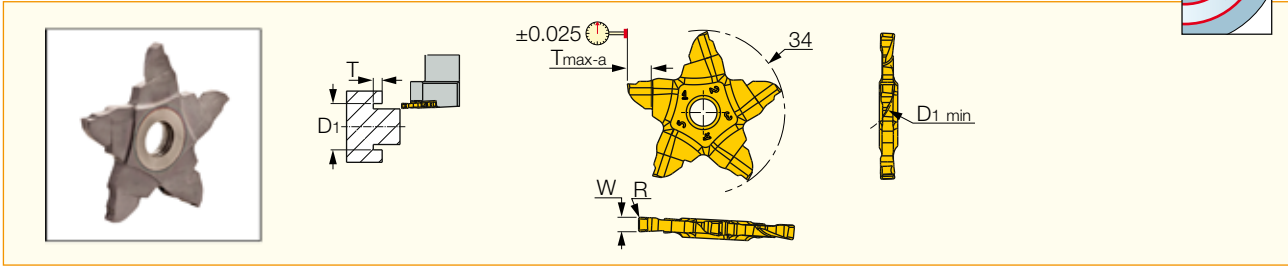

Designation	Dimensions				IC908	Recommended Machining Data
	W	R	T _{max-a}	D _{1 min}		f face-groove (mm/rev)
PENTA 34F239-0.15-22R/LS	2.39	0.15	5.00	22.0	●	0.08-0.12
PENTA 34F247-0.20-22R/LS	2.47	0.20	5.00	22.0	●	0.08-0.12
PENTA 34F300-0.40-22R/LS	3.00	0.40	5.00	22.0	●	0.08-0.15
PENTA 34F400-0.40-22R/LS	4.00	0.40	5.00	22.0	●	0.08-0.15



• For cutting speed recommendations, see pages 98-114.

For tools, see pages: PCHPRS/LS (94).

PENTACUT

PCHPRS/LS

Perpendicular Shank Tools, for Machining Next to Long Central Shaft, Carrying Pentagonal Inserts

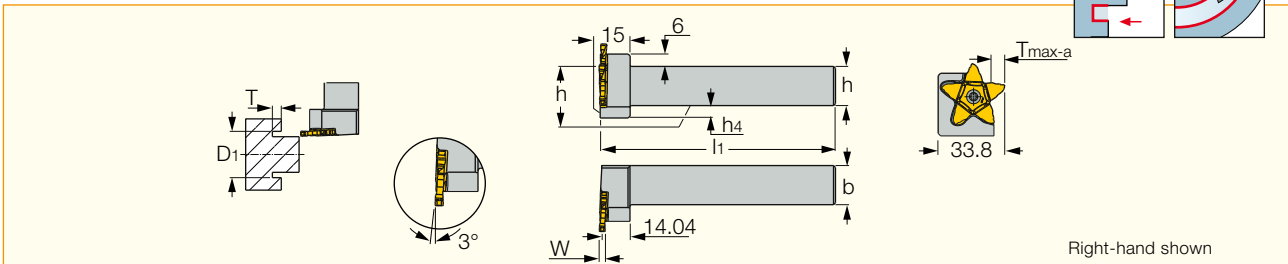

Designation	h	b	W _{min}	W _{max}	l ₁	h ₄	T _{max-a} ⁽¹⁾
PCHPR/LS 20-34	20.0	20.0	2.39	4.00	120.00	6.0	5.00
PCHPR/LS 25-34	25.0	25.0	2.39	4.00	135.00	-	5.00

⁽¹⁾ Insert limit

For inserts, see pages: PENTA 34F-RS/LS (94).

Spare Parts




Designation	Screw	Key
PCHPRS/LS	SR 16-212-01397RS	T-20/5

Following the very successful performance in face grooving of the PENTA 34F pentagonal insert, ISCAR has developed the **PENTA 34F RS/LS** inserts, **for face grooving and recessing along shafts** up to 5 mm depth of cut at a minimum 22 mm diameter. **After the initial groove, there is no** limitation for widening the groove outwards.


The new inserts are clamped on **PCHP-RS/LS ..-34** - newly designed tools. They are positioned nearly perpendicular to the shanks, **slightly tilted** (3°), to enable machining next to long central shaft.


Features

- A combination of very rigid clamping system and strong insert design enables machining at very high machining parameters.
- Improved C-type chipformer with an expanded feed range of 0.05-0.25 mm/rev.
- Very rigid clamping system produces excellent sidewall straightness and surface quality and flat groove bottoms.
- In case of edge breakage, the tool will survive and other cutting corners may still be used.
- Easy and fast edge indexing from either side of the holder.
- Multi-corner, **five cutting edges**, which provide the most advantageous price per cutting edge.

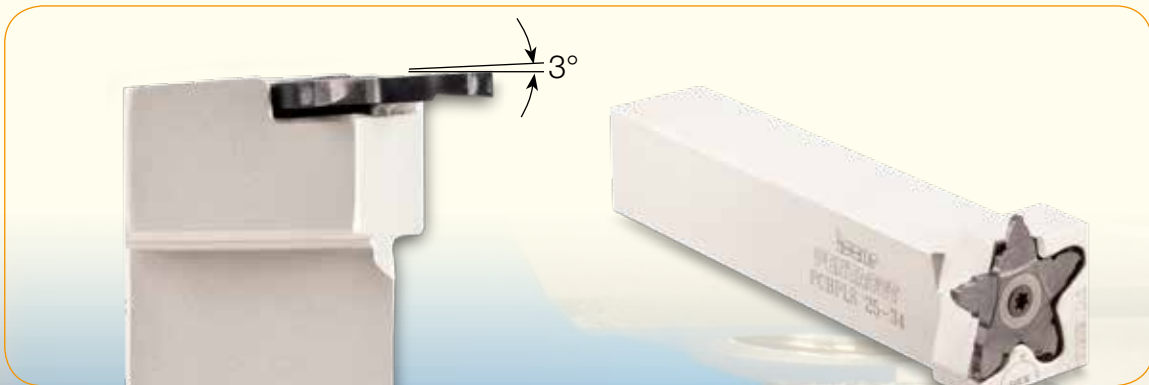

Special Solutions for Face Grooving

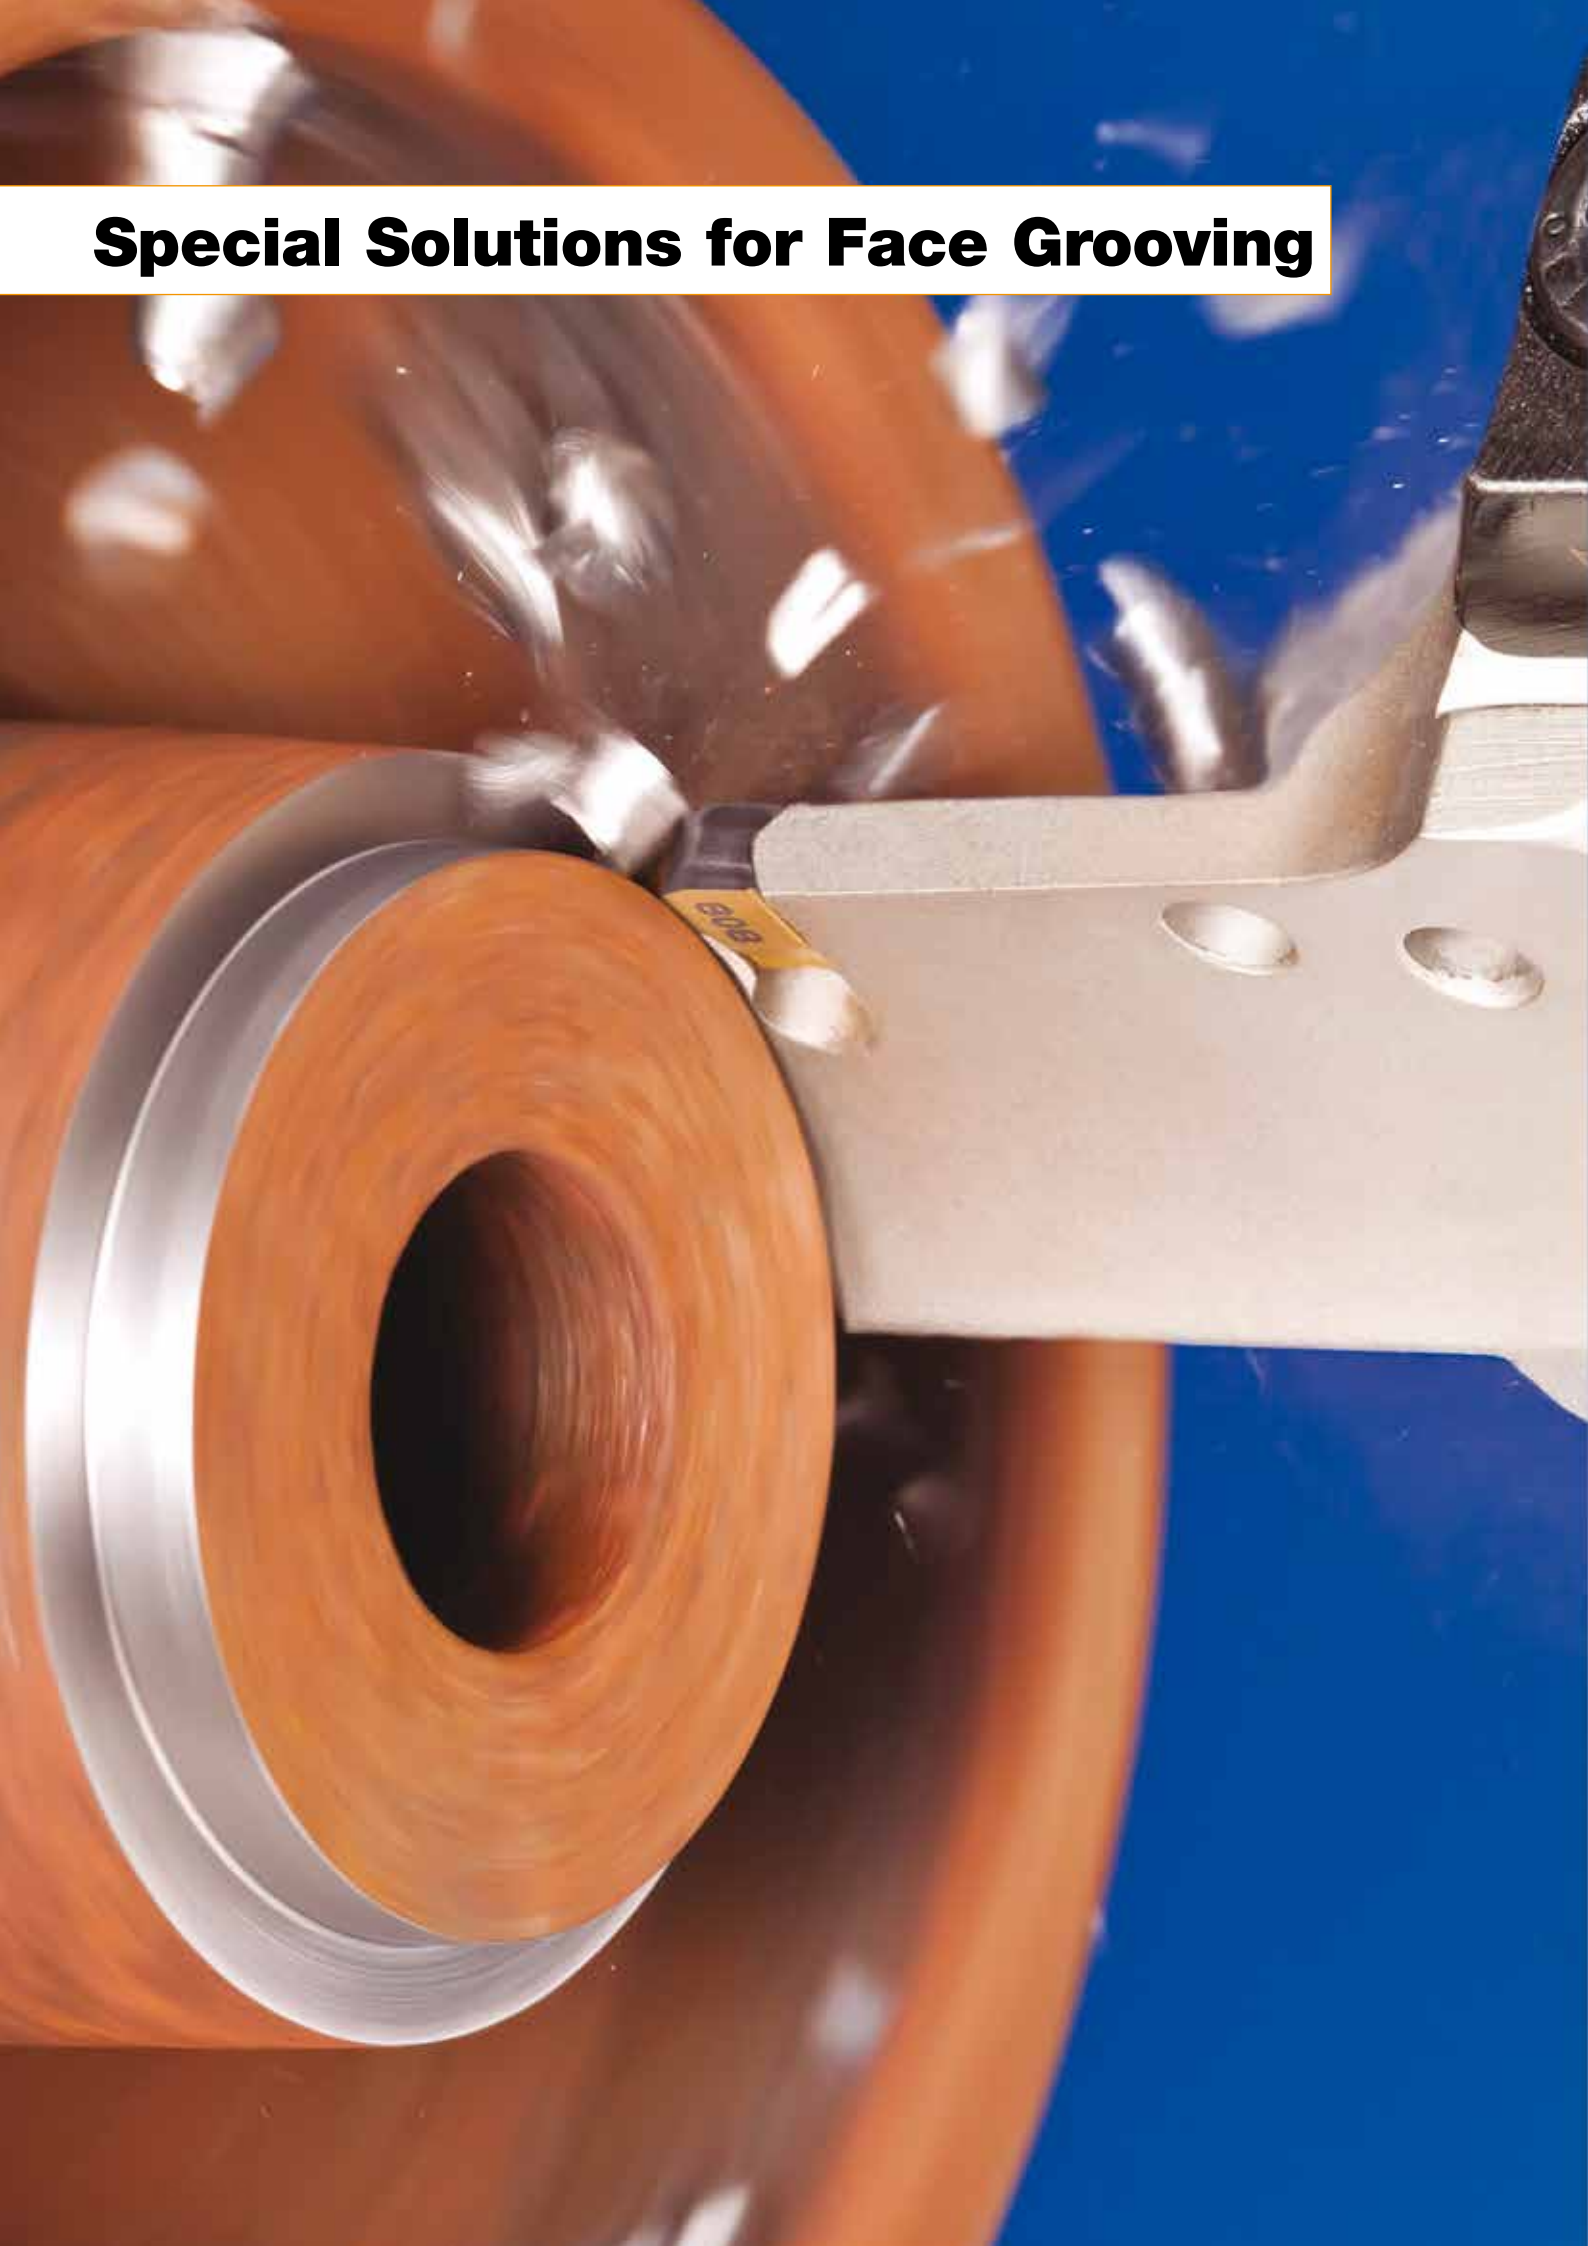

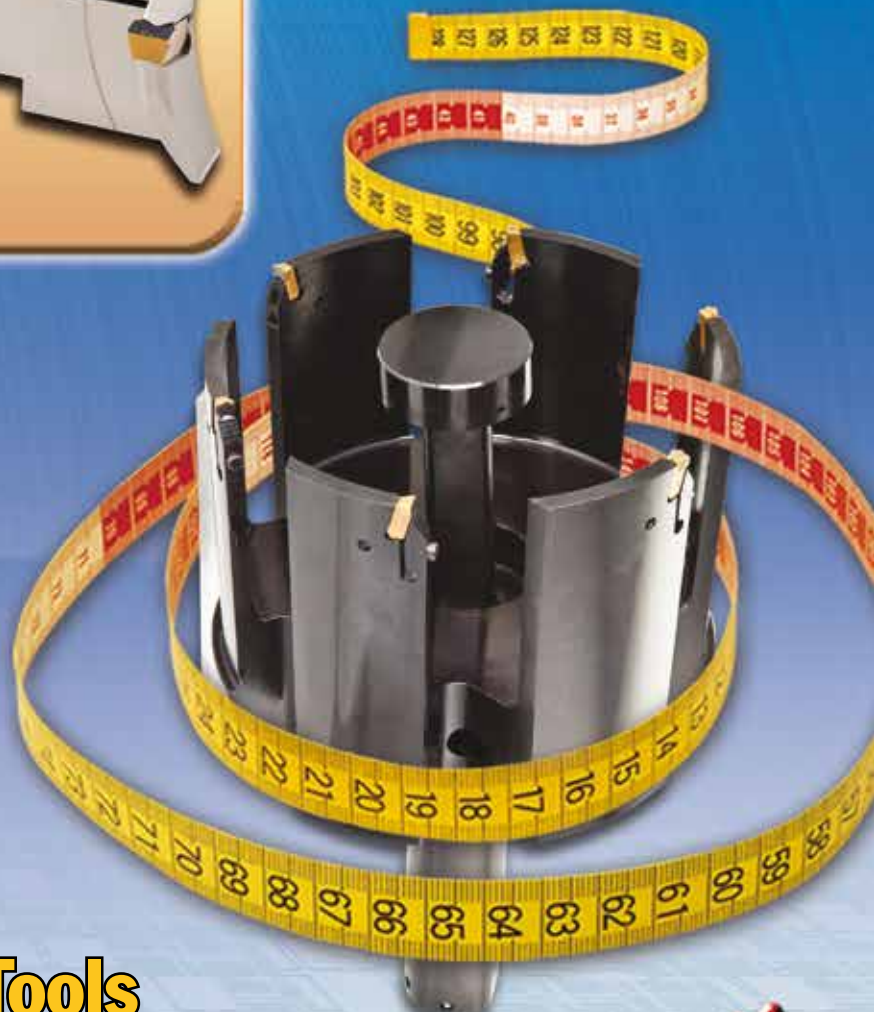




**ISCAR's Variety of
Specially Tailored Tools
for Face Machining
Applications**

**SPECIALLY
TAILORED**

Clamping the Insert

Clamping an insert correctly into the holder is necessary for stable machining.

- Be sure that the seat is clean of dirt and swarf.
- At the first stage of clamping, ease the insert gently into place. Make sure that the prismatic surfaces match.

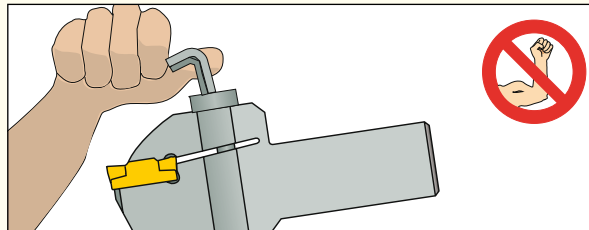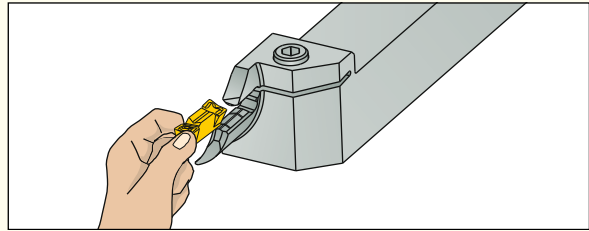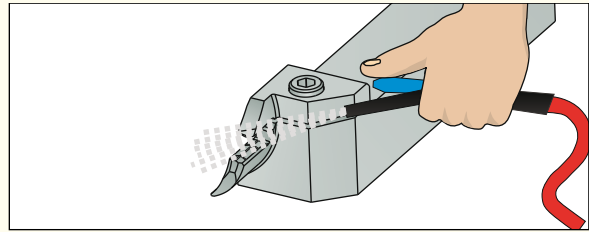

• Screw Clamping Torque

Insert Width	Nxm
3	4-5
4	5-6
5	6-7
6/8	7-9
CGFG 51...	4-6



The unique chipformer is designed for deep grooving and face turning both toward and away from center, with excellent chip formation.




HELIFACE HFPR/L & HGPL Type

For general use in turning and grooving on all kinds of materials. For deep grooving in low-to-medium feeds 0.04-0.15 mm/rev. Min grooving dia. 12 mm.




HELI-GRIP GRIP...Y Type

The "all in one" insert: for parting, external grooving and turning, internal grooving and turning, face grooving and turning.



DO-GRIP DGN...C Type

For grooving operations only. Strong cutting edge for hard materials and tough applications in feeds 0.1-0.2 mm/rev.




DO-GRIP DGN...J Type


For grooving operations only. Positive rake, for soft materials in low-to-medium feeds 0.05-0.15 mm/rev.

Face Machining Guide


Tool Selection - Follow these recommendations to choose the right tool for high performance

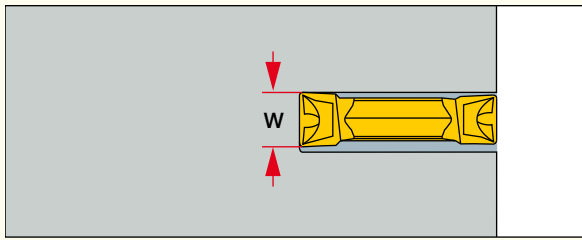

Choose the widest possible insert and tool, according to the cutting width and geometry to be machined.

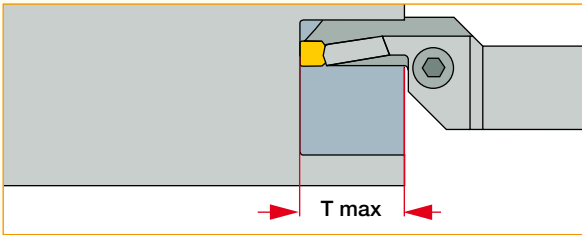


Choose the shortest tool blade overhang, according to the maximum depth required.

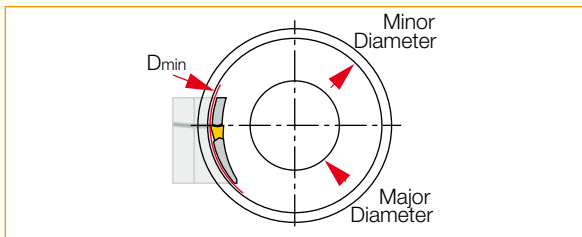


Choose the tool range with the largest diameter, depending on the initial grooving diameter required in the application.

Note: On integral shank tools the given range refers to the holder capacity.

Tool Adjustment - Prior to machining, check and adjust the following tool positions.

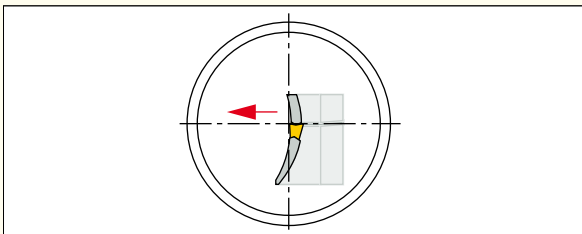


Check the cutting edge height at center line, machine in light turning down to center, and check for burr.

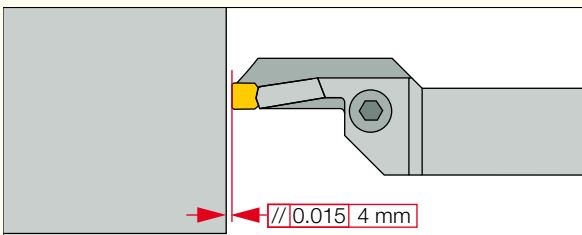

Check parallelism of cutting edge and the machined surface. Correct position can guarantee good surface quality when face turning in both directions.


Face Machining Guide

Recommended machining sequence in roughing operation using multifunction HELIFACE tools

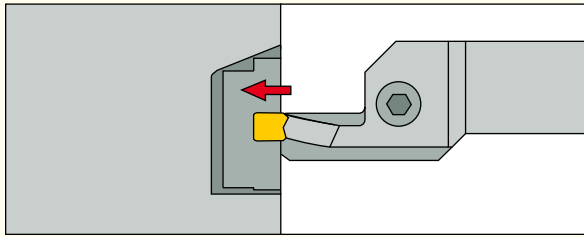


1

Groove at the initial diameter up to the depth of cut selected for next step in face turning.

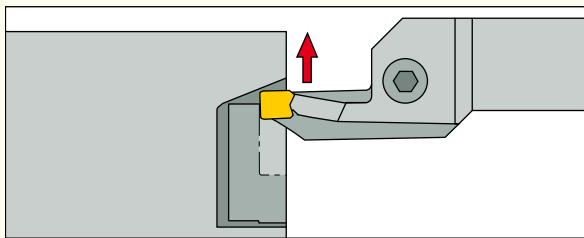

2

Continue with face turning away from center.

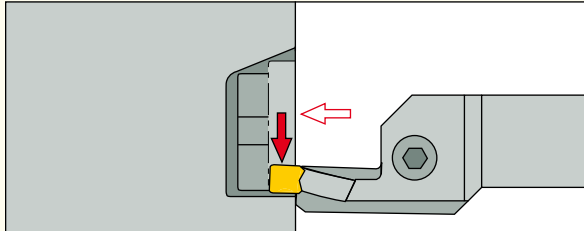


3

After rapid positioning back into initial groove, continue with face turning to center.

Note: When face grooving, reduce the speed by 40% in relation to that used in face turning.


Optimizing the Machining Sequence

Recommended machining sequence using multifunction tools

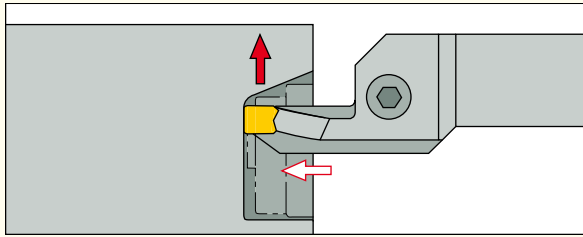


1

Groove at the initial diameter to the final depth of groove and continue face turning away from center to the tangential point on the radius.

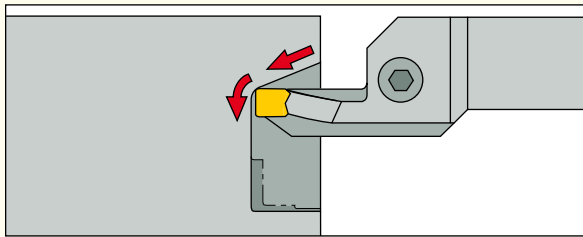


2

Finish major diameter toward the bottom and generate the radius.

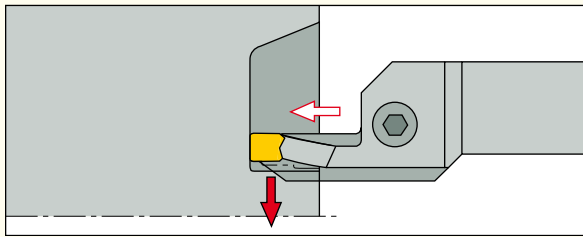

3

Position the tool in rapid movement in the initial groove, continue face turning to center, without touching the machined roughing steps on the wall.

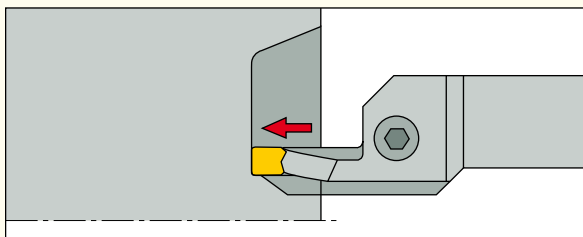


4

Finish boring the minor diameter to the bottom, up to final depth.


Note: When face grooving, reduce the speed by 40% in relation to that used in face turning.

The Multifunction Advantage

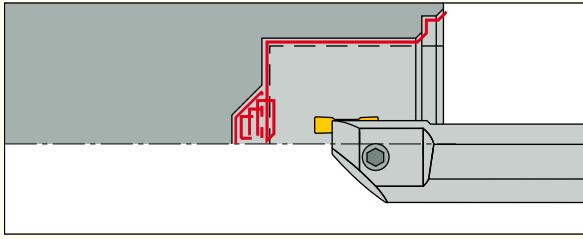


1

The **HELIFACE** internal boring bar **HFIR/L MC** type with internal coolant can replace the three different ISO tools and shorten machining time by 20%.

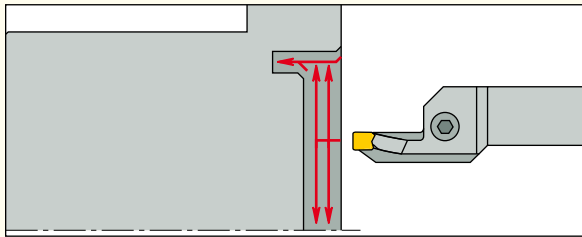

2

A single multifunction tool machines the whole part: grooving, face turning and chamfering, replacing three ISO tools and reducing machining time by 40%.

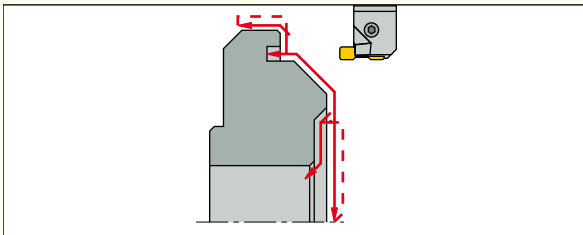


3

A single integral **HELIFACE** tool **HFHPL-M** replaces three ISO tools and reduces machining time by 50%.


The Multifunction Advantage

This workpiece was machined using three different conventional tools

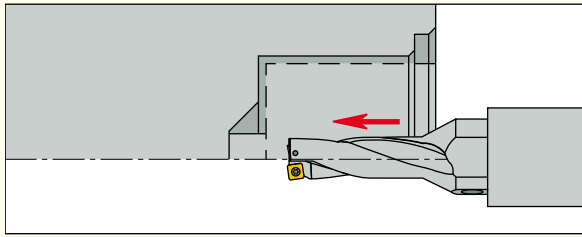


1

An indexable drill for bottom drilling.

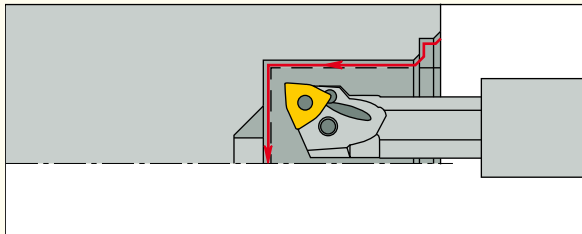

2

A standard internal boring bar with trigon insert for roughing and finishing.

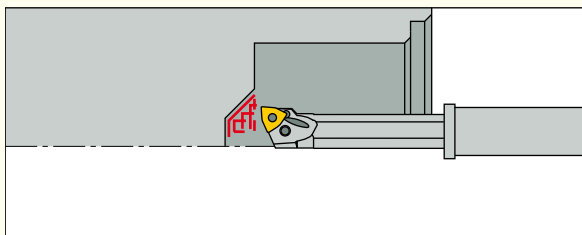


3

A standard internal boring bar with trigon insert for bottom machining. This operation requires a small diameter shank and long overhang.


The HELIFACE Solution

The HELIFACE internal boring bar **HFIR/L MC** type with internal coolant can replace the three different ISO tools and shorten machining time by 20%.

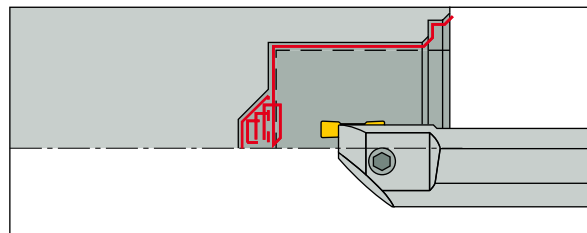


The Multifunction Advantage


This part was machined using three different conventional tools

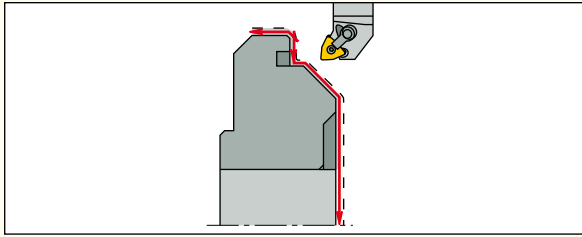

1 A standard ISO tool for external turning.

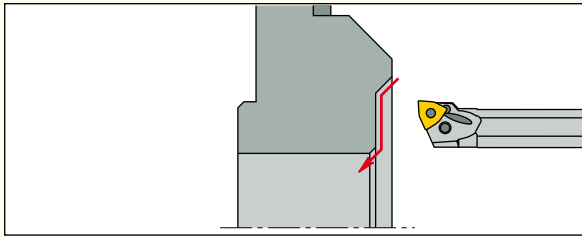


2 A boring bar for face turning and chamfering.

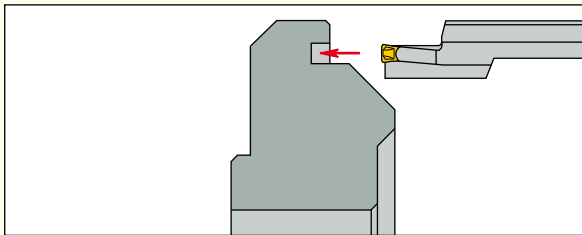

3 A face grooving tool for grooving, recessing and chamfering.

The HELIFACE Solution

A single integral HELIFACE tool **HFHPL-M** replaces three ISO tools and reduces machining time by 50%.

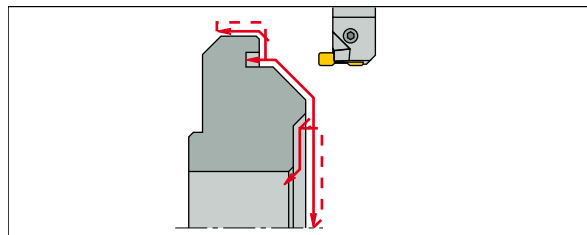

Insert Replacement


EDG 33B

The New Eccentric Extractor



Simple to operate; controlled rotation requires low force; guarantees limited upper jaw movement and secures maximum load on blade.

Two extractor pins are placed in the two holes in the holder blades.

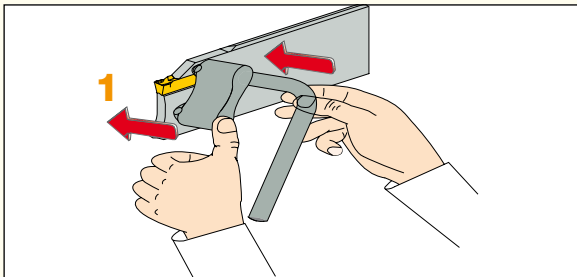


Indexing

Place the EDG extractor in the holes

1- Hold the extractor against the tool

2- Rotate the eccentric handle to lift the upper jaw

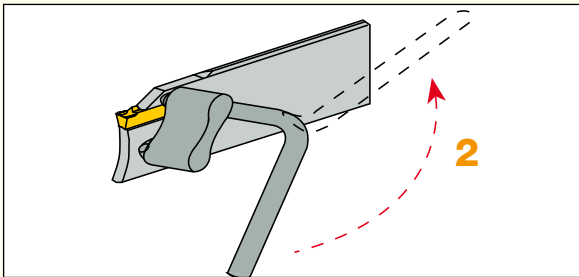

Grade Selection for Facing Applications

Material Groups	ISO P 1 - 11	ISO H 38 - 41	ISO M 12 - 14	ISO S 31 - 37	ISO K 15 - 20	ISO N 21 - 28
	Steel	Hard Steel	Stainless Steel	High Temp.	Cast Iron	Nonferrous
<p>FACING</p>	Harder ↑ IC808 IC8250 IC830 ↓ Tougher	Harder ↑ IC808 ↓ IC20 Tougher	Harder ↑ IC808 IC8250 IC354 IC830 ↓ Tougher	Harder ↑ IC808 ↓ IC20 Tougher	Harder ↑ IC5010 IC428 ↓ Tougher	Harder ↑ IC20 ↓ Tougher

■ First choice

Machining Data for Face Machining

ISO	Material	Condition	Tensile Strength [N/mm ²]	Hardness HB	Material No.	
P	Non-alloy steel and cast steel, free cutting steel	< 0.25 %C	Annealed	420	125	1
		>= 0.25 %C	Annealed	650	190	2
		< 0.55 %C	Quenched and tempered	850	250	3
		>= 0.55 %C	Annealed	750	220	4
			Quenched and tempered	1000	300	5
	Low alloy steel and cast steel (less than 5% all elements)	Annealed	600	200	6	
				930	275	7
		Quenched and tempered	1000	300	8	
				1200	350	9
	High alloyed steel, cast steel, and tool steel	Annealed	680	200	10	
		Quenched and tempered	1100	325	11	
M	Stainless steel and cast steel	Ferritic/martensitic	680	200	12	
		Martensitic	820	240	13	
		Austenitic	600	180	14	
K	Grey cast iron (GG)	Ferritic/pearlitic		180	15	
		Pearlitic		260	16	
	Ductile cast iron (nodular GGG)	Ferritic		160	17	
		Pearlitic		250	18	
	Malleable cast iron	Ferritic		130	19	
		Pearlitic		230	20	
N	Aluminum-wrought alloy	Not cureable		60	21	
		Cured		100	22	
	Aluminum-cast, alloyed	<=12% Si	Not cureable		75	23
			Cured		90	24
		>12% Si	High temperature		130	25
			>1% Pb	Free cutting		110
	Copper alloys	Brass		90	27	
		Electrolytic copper		100	28	
		Duroplastics, fiber plastics			29	
	Non-metallic	Hard rubber			30	
S	High temp. alloys	Fe based	Annealed		200	31
			Cured		280	32
		Ni or Co based	Annealed		250	33
			Cured		350	34
			Cast		320	35
	Titanium and Ti alloys		RM 400		36	
		Alpha+beta alloys cured	RM 1050		37	
H	Hardened steel	Hardened		55 HRc	38	
		Hardened		60 HRc	39	
	Chilled cast iron	Cast		400	40	
	Cast iron	Hardened		55 HRc	41	

Material	Groove-Turn, Profiling				
No.	IC228/528	IC830	IC354	IC808	IC8250
1	80 - 100	90 - 110	70 - 100	120 - 160	170 - 220
2	70 - 90	70 - 100	60 - 90	100 - 140	150 - 200
3	60 - 80	60 - 90	50 - 80	80 - 130	120 - 180
4	60 - 90	60 - 100	60 - 80	90 - 140	130 - 190
5	50 - 80	50 - 80	50 - 70	70 - 120	100 - 160
6	60 - 90	60 - 100	60 - 80	90 - 140	130 - 190
7	50 - 80	50 - 90	50 - 70	70 - 120	100 - 170
8	50 - 70	50 - 80	50 - 70	70 - 110	100 - 160
9	40 - 70	40 - 70	40 - 60	60 - 100	90 - 150
10	70 - 90	70 - 100	60 - 90	100 - 140	150 - 200
11	40 - 70	40 - 70	40 - 60	60 - 100	90 - 150
No.	IC830	IC808	IC907	IC8250	IC08
12	60 - 110	90 - 160	90 - 160	90 - 160	40 - 70
13	60 - 100	80 - 150	80 - 150	80 - 150	40 - 70
14	50 - 100	70 - 140	70 - 140	80 - 140	30 - 60
No.	IC808	IC8250	IC428	IC5010	IC20
15	90 - 150	110 - 190	115-200	130 - 220	60 - 100
16	70 - 100	90 - 130	100-140	110 - 150	50 - 70
17	70 - 130	90 - 160	100-170	110 - 190	50 - 80
18	60 - 100	80 - 130	85-135	90 - 150	40 - 70
19	100 - 160	120 - 200	130-210	140 - 230	60 - 100
20	80 - 130	100 - 160	105-170	120 - 190	50 - 80
No.	IC08	IC20			
21	330 - 990	300-900			
22	250 - 770	225-700			
23	250 - 770	225-700			
24	165 - 495	150-450			
25	165 - 330	150-300			
26	165 - 330	150-300			
27	125 - 250	115-225			
28	80 - 165	75-150			
29	45 - 165	40-150			
30					
No.	IC808	IC20			
31	20-40	20-30			
32	15-30	15-20			
33	15-20	15-20			
34	15-20	15-20			
35	15-20	15-20			
36	90-120	80-100			
37	20-50	20-40			
No.	IC808	IC20			
38	25-30	20-30			
39	20-30	15-25			
40	30-45	30-40			
41	25-30	25-30			

USER GUIDE

Machining Data for Face Machining


ISO	Material	Condition	Tensile Strength [N/mm ²]	Hardness HB	Material No.	
P	Non-alloy steel and cast steel, free cutting steel	< 0.25 %C	Annealed	420	125	1
		>= 0.25 %C	Annealed	650	190	2
		< 0.55 %C	Quenched and tempered	850	250	3
		>= 0.55 %C	Annealed	750	220	4
			Quenched and tempered	1000	300	5
	Low alloy steel and cast steel (less than 5% all elements)	Annealed		600	200	6
				930	275	7
		Quenched and tempered		1000	300	8
				1200	350	9
	High alloy steel, cast steel, and tool steel	Annealed	680	200	10	
		Quenched and tempered	1100	325	11	
M	Stainless steel and cast steel	Ferritic/martensitic	680	200	12	
		Martensitic	820	240	13	
		Austenitic	600	180	14	
K	Grey cast iron (GG)	Ferritic/pearlitic		180	15	
		Pearlitic		260	16	
	Ductile cast iron (nodular GGG)	Ferritic		160	17	
		Pearlitic		250	18	
	Malleable cast iron	Ferritic		130	19	
		Pearlitic		230	20	
N	Aluminum-wrought alloy	Not cureable		60	21	
		Cured		100	22	
	Aluminum-cast, alloyed	<=12% Si	Not cureable		75	23
			Cured		90	24
		>12% Si	High temperature		130	25
	Copper alloys	>1% Pb	Free cutting		110	26
			Brass		90	27
			Electrolitic copper		100	28
	Non-metallic		Duroplastics, fiber plastics			29
			Hard rubber			30
S	High temp. alloys	Fe based	Annealed		200	31
			Cured		280	32
		Ni or Co based	Annealed		250	33
			Cured		350	34
			Cast		320	35
	Titanium and Ti alloys		RM 400		36	
		Alpha+beta alloys cured	RM 1050		37	
H	Hardened steel	Hardened		55 HRc	38	
		Hardened		60 HRc	39	
	Chilled cast iron	Cast		400	40	
	Cast iron	Hardened		55 HRc	41	

USER GUIDE

Cutting Speed (m/min)	GFQR IC528 Feed (mm/rev)	PICCO IC228 Feed (mm/rev)	MIFR 8 IC908 Feed (mm/rev)	MIFR 10 IC908 Feed (mm/rev)
40-180	0.02-0.08	0.015-0.05	0.015-0.08	0.03-0.10
40-130	0.02-0.06	0.015-0.04		
40-120	0.02-0.06	0.015-0.04		
40-140	0.02-0.08	0.015-0.04		
40-140	0.02-0.08	0.015-0.04		
40-120	0.02-0.06	0.015-0.03		
40-120	0.02-0.05	0.015-0.03		
40-140	0.02-0.08	0.015-0.04		
40-120	0.02-0.08	0.015-0.03		
40-120	0.02-0.08	0.015-0.04	0.015-0.07	0.03-0.08
40-120	0.02-0.07	0.015-0.04		
40-100	0.02-0.06	0.015-0.03		
40-140	0.02-0.08	0.015-0.05	0.02-0.10	0.05-0.12
40-120	0.02-0.07	0.015-0.04		
40-140	0.02-0.08	0.015-0.04		
40-120	0.02-0.07	0.015-0.04		
40-140	0.02-0.06	0.015-0.04		
40-120	0.02-0.07	0.015-0.04		
150-320	0.02-0.08	0.015-0.05	0.02-0.10	0.05-0.15
100-250	0.02-0.08	0.015-0.05		
150-300	0.02-0.08	0.015-0.05		
150-300	0.02-0.08	0.015-0.05		
100-150	0.02-0.08	0.015-0.05		
80-230	0.02-0.08	0.015-0.05		
70-200	0.02-0.08	0.015-0.05		
50-180	0.02-0.08	0.015-0.05		
20-40	0.02-0.06	0.015-0.04	0.015-0.07	0.02-0.08
15-30	0.02-0.06	0.015-0.04		
15-20	0.02-0.06	0.015-0.04		
15-20	0.02-0.06	0.015-0.04		
15-20	0.02-0.06	0.015-0.04		
40-120	0.02-0.06	0.015-0.04		
20-50	0.02-0.06	0.015-0.04		

Machining Conditions in Face Grooving

Recommended feed range for grooving, with **HFPR/L** inserts in various widths

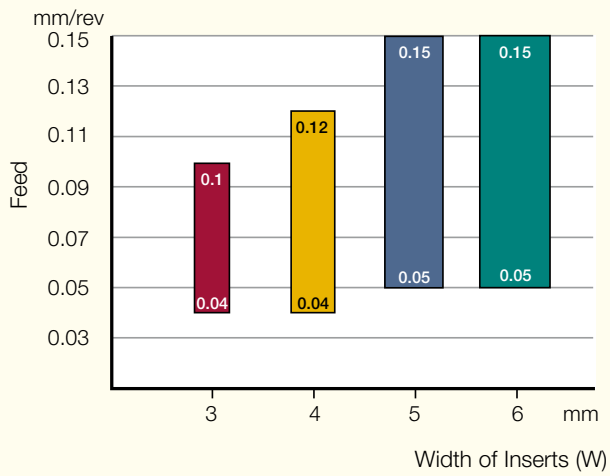


Chip shapes for grooving, according to width of insert and feed, using **HFHR/L** toolholders




Note: In face grooving, narrow and deformed chips are preferred. Curled and long chips can flow out more easily from deep grooves.

Machining Conditions in Face Turning

Recommended depth of cut and feed range for face turning with **HFPR/L** inserts in various widths, using **HFHR/L** toolholders

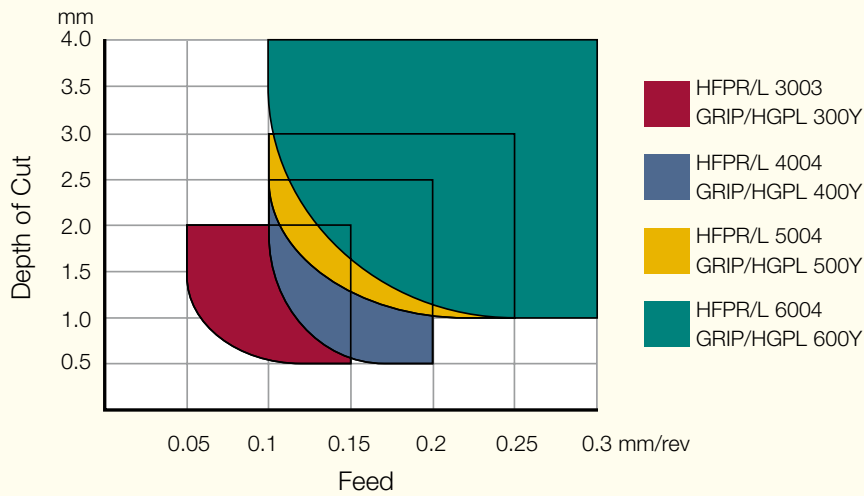


Chip shapes in face turning with inserts **HFPR/L-5004** & **HFPR/L 6004** and **HFHR/L** toolholders

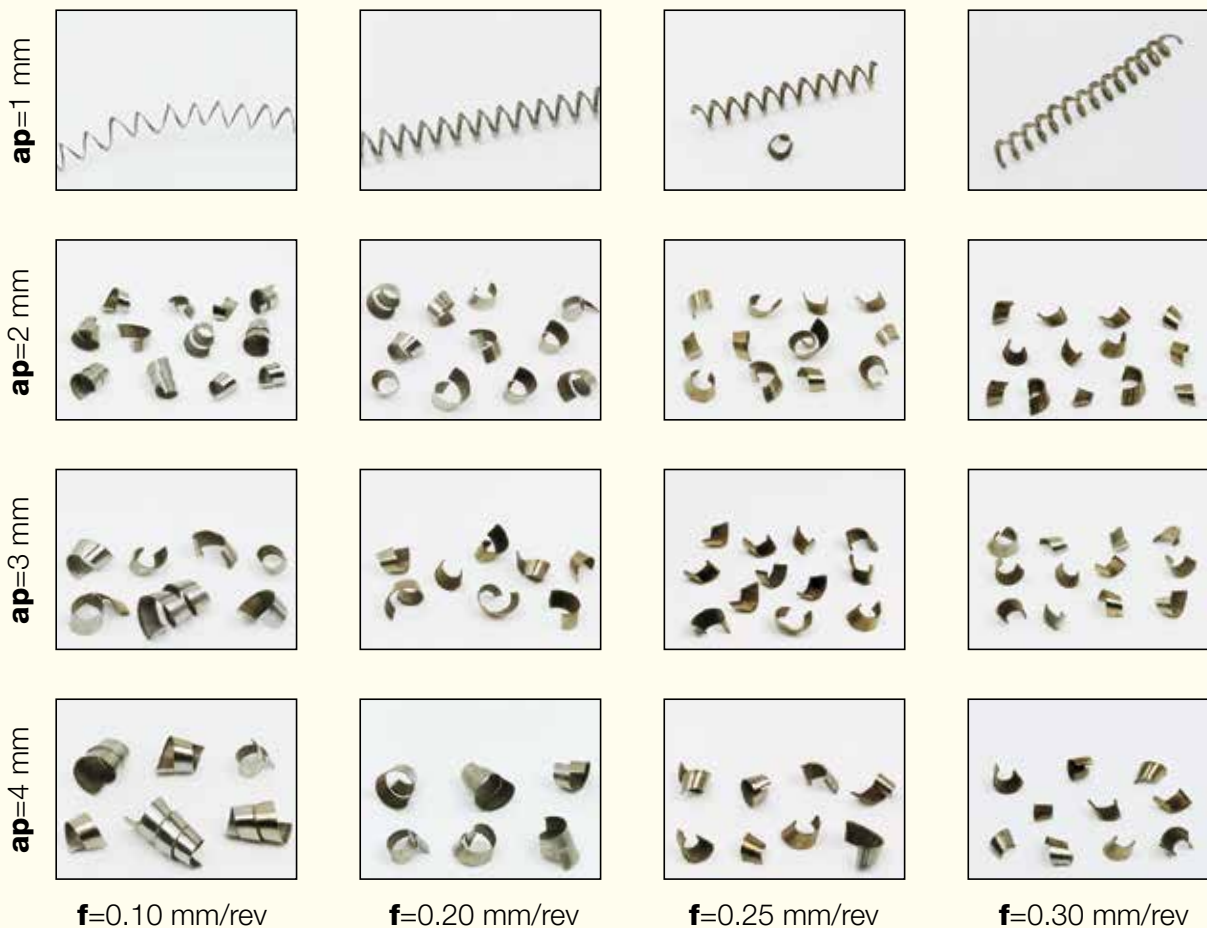


Note: In roughing, increase feed at small depth of cut, and reduce feed at large depth of cut

Face Grooving and Turning Recommendations Using Adapters for 3 mm Inserts

Recommended feed range for grooving with **GRIP 3...** and **HGPL 3...** inserts, with HGAIR/L and HGAER/L adapters. Feed range changes according to adapter type.

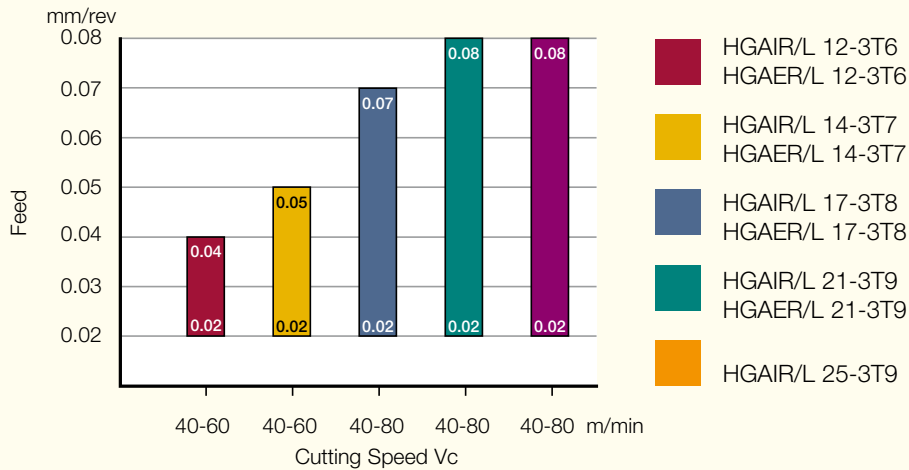


Recommended depth of cut and feed range for turning with and inserts, with **HGAIR/L** and **HGAER/L** adapters. Feed range changes according to adapter type.

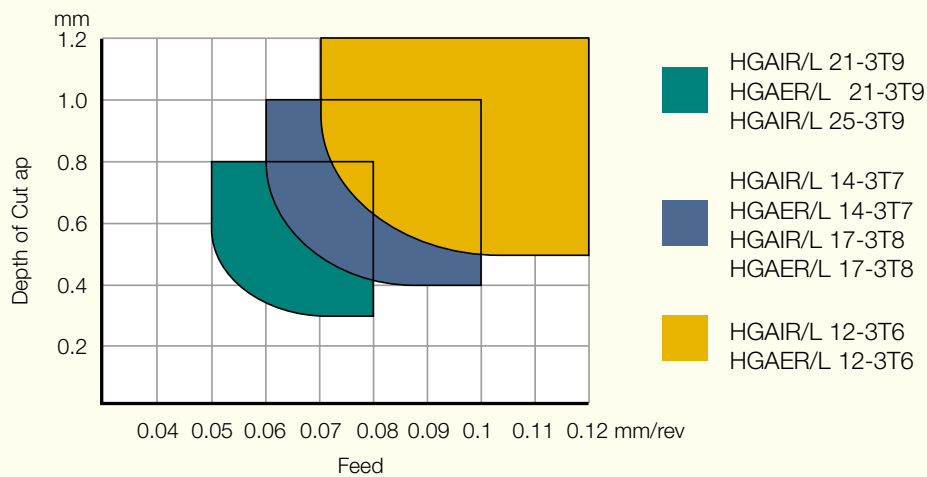


Note: In roughing, increase feed at small depth of cut, and reduce feed at large depth of cut.

Face Grooving and Turning Recommendations Using Adapters for 4-6 mm Inserts

Recommended feed range in grooving with **HFPR/L** inserts and **HFAIR/L** & **HFAER/L** adapters

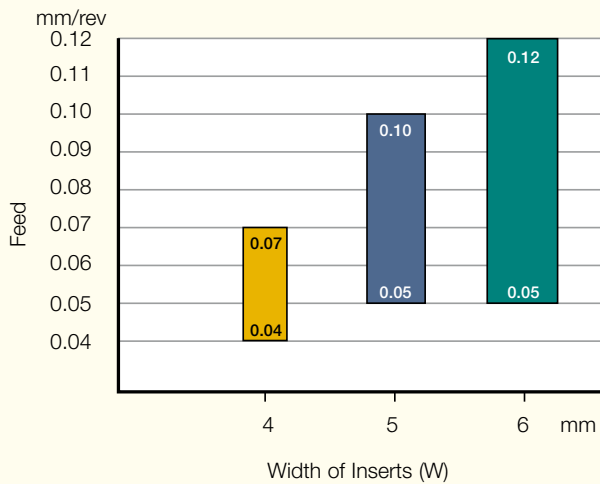


Recommended depth of cut and feed range in turning with **HFPR/L** inserts and **HFAIR/L** & **HFAER/L** adapters. Feed range changes according to adapter type.

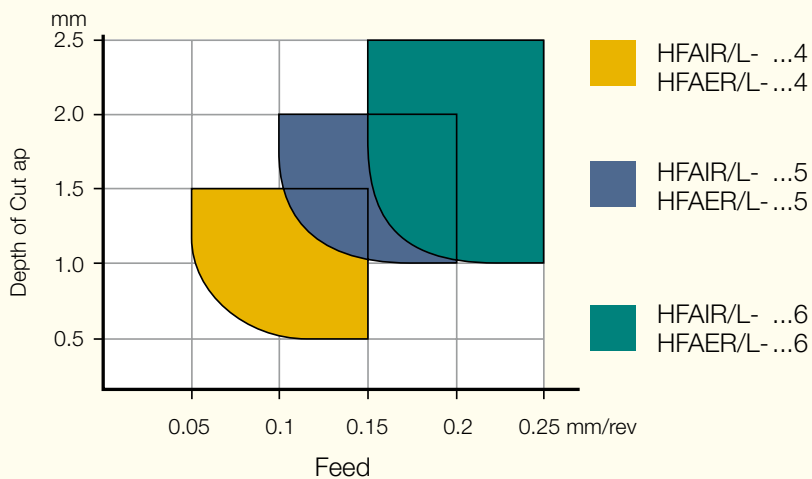







Note: In roughing, reduce feed when depth of cut is increased, and increase feed at small depth of cut.

Specially Tailored

Semi-Standard Face Grooving and Undercutting Tools

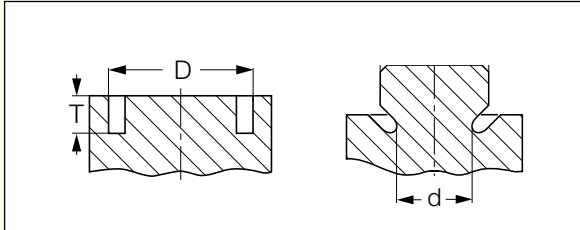

The following drawings show typical semi-standard face grooving tools which can be ordered. Please specify all relevant dimensions and attach workpiece material geometric details.

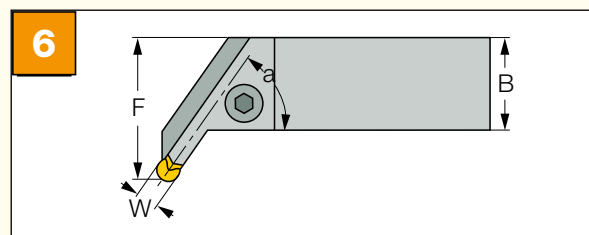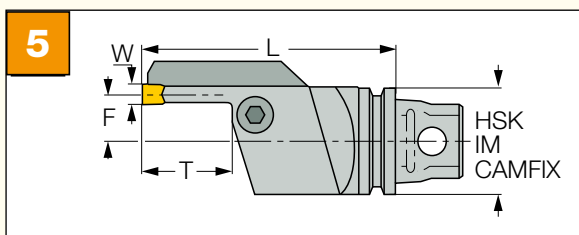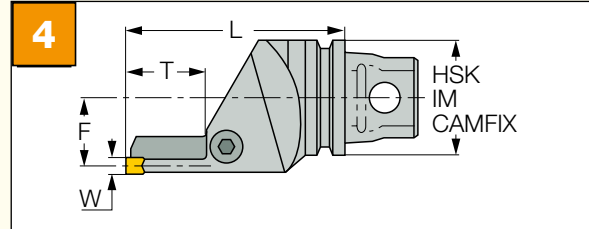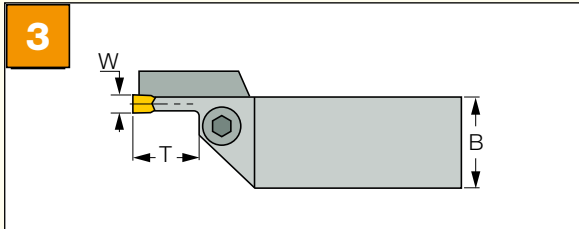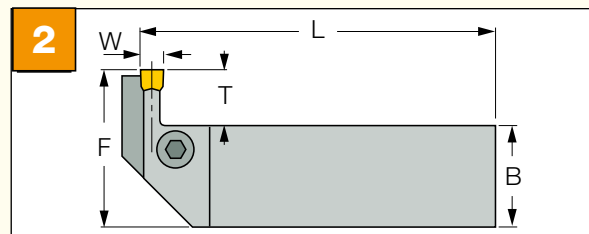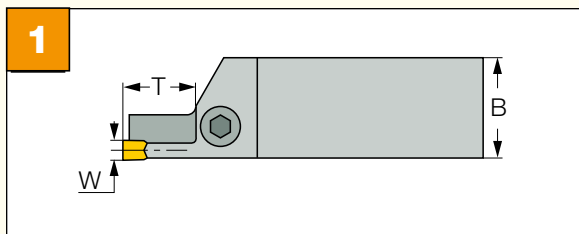



Alphabetical Index

C

CGFG 51-P8 67

C#-GHAD-8 65

C#-GHAPR/L-8 65

C#-HAD 33

C#-HAPR/L 32

C#-HFIR/L-MC 42

C#-MAHD 53

C#-MAHDR-45 52

C#-MAHPD 54

C#-MAHUR/L 53

CR HFIR/L-M 43

C#-TBK-R/L 59

D

DGN/DGNC/DGNM-C 48

DGN/DGNM-J/JS/JT 49

DGN-W 49

G

GAFG-R/L-8 67

GDMA 79

GDMF 69

GDMM-CC 76

GDMN 70

GDMY 73

G

GDMY-F	75
GDMY (full radius)	74
GFQR	13
GHAPR/L-8	64
GHAR/L-8	64
GHFG-R/L-8	62
GHFGR/L-8	63
GHMPR/L	84
GHMR/L	83
GHMUR/L	82
GHPCOR/L	16
GIA-K (long pocket)	73
GIA-K (W=3-6)	77
GIF	76
GIF-E (W=8,10)	71
GIF-E (W=8,10 full radius)	72
GIFG-E (W=8)	68
GIF (long pocket)	71
GIMF	68
GIMM 8CC	75
GIMY	69
GIMY-F	74

G

GIMY (full radius)	70
GIMY-UN	82
GIPA (full radius W=3-6)	80
GIPA/GIDA 8 (full radius)	81
GIPA (W=3-6)	79
GIP-UN	83
GIPY	78
GITM	77
GITM (full radius)	78
GRIP	45
GRIP (full radius)	46

H

HAI-C	39
HAPR/L	31
HAR/L	31
HFAER/L-4T	30
HFAER/L-5T, 6T	30
HFAIR/L-4	38
HFAIR/L-DG	40
HFFA	20
HFFH	20
HFFR/L-T	29
HFHPR/L-M	35

H

HFHR/L-3T	23
HFHR/L-4T	24
HFHR/L-5T	25
HFHR/L-6T	26
HFHR/L-M	34
HFIR/L-MC	41
HFPAD-3	27
HFPAD-4	27
HFPAD-5	28
HFPAD-6	28
HFPN	21
HFPR/L	44
HFPR/L (full radius)	44
HGAER/L-3	29
HGAIR/L-3	38
HGHR/L-3	22
HGN-C	47
HGN-J	47
HGN-UT	48
HGPL	50
HLPGR/L	84
HSK A63WH-MAHDOR	56

H	HSK A63WH-MAHUR/L	56
	HSK A-WH-MAHDR/L-45	55
	HSK A-WH-TBK-R/L	60
I	IM63 XMZ TBK	60
	IM-GHAD-8	66
	IM-GHAPR/L-8	66
	IM-HAD	33
	IM-HAPR/L	32
	IM-HFIR/L-MC	42
	IM-MAHD	57
	IM-MAHPD	57
	K	KIT MINCUT
KIT PICCO Face		12
L	LPGIR	85
M	MAHPR/L	51
	MAHR/L	51
	MFHR-JHP	17
	MGCH-C (face)	13
	MIFHR	17
	MIFR	18
	MIUR 8	18
P	PCADR/L 34N-RE	93

P	PCHBR/L	92
	PCHPR/L	91
	PCHPRS/LS	94
	PCHR/L-34	91
	PENTA 34F-R/L	90
	PENTA 34F-RS/LS	94
	PICCO-010/610 (face grooving)	9
	PICCO-010 (round face groove)	10
	PICCO-015 (face grooving)	12
	PICCO-016/020 (face grooving)	11
	PICCO-620 (groov. along shaft)	10
	PICCO ACE	15
	PICCO/MG PCO (holder)	14
	PICCO Mini-Bar Tool Kit Face Grooving KIT Picco SET-4R	12
S	SGTBF	61
	SGTBK	59
	SGTBU/SGTBN	58
T	TNFFA-IQ	87
	TNFFH-IQ	86
	TNF-M-IQ	89
	TNF-P-IQ	88
U	UBHCR/L	61



ISCAR
IBAQUS

**Your One Stop App for
All Your Technical Needs**



ISCAR **IBAQUS**

Your Technical Mentor

- ITA (Iscar Tool Advisor)
- CMS Electronic Catalog
- Interactive Catalog for Tablets
- Insert Converter
- Product ID
- Machining Calculator
- YouTube Tech Talks



Your Tool Advisor **Genius**

ITA recommends the optimal tool based on application parameters and your machine power. 3 tool options, 25 alternatives, cutting data, power consumption, cutting time, metal removal rates, engineering support and more.



Dansk
English
Français
Deutsch
Suomi
Italiano
日本語
한국어
Nederlands
Português
Русский
Svenska
Español-España
Tiếng Việt
中文
Български език
Српски
Magyar
Hrvatski
Español-México
Norsk
Polski
Românește
Slovenščina
Türkçe
Slovenčina
Čeština

Available for Windows and MAC operating systems, including iPhones and iPads.

Member IMC Group
ISCAR
www.iscar.com

ISCAR LTD.
Headquarters
Tefen 24959, Israel
Tel +972 (0)4 997 0311
Fax +972 (0)4 987 3741
www.iscar.com
headquarter@iscar.co.il

Argentina
ISCAR TOOLS ARGENTINA SA
Monteagudo 222
1437 Buenos Aires
Tel +54 114 912 2200
Fax +54 114 912 4411
admin@iscararg.com.ar

Australia
Headquarters and Technical Centre
Norwest Business Park
30 Brookhollow Avenue
Baulkham Hills NSW 2153
Australian Technical Training Centre
Bell Street, Preston, Victoria, 3072
Tel +61 (0) 2 8848 3500
Fax +61 (0) 2 8848 3511
iscaraus@iscar.com.au
www.iscar.com.au

Austria
ISCAR AUSTRIA GmbH
Im Stadtgut C 2
A-4407 Steyr-Gleink
Tel +43 7252 71200-0
Fax +43 7252 71200-999
office@iscar.at
www.iscar.at

Belarus
JV ALC "TWING-M"
Slutskaya str. 3,
223056 v. Sennitsa
Minsk district
Tel +375 17 506-32-38
+375 17 506-33-31/65
Tel/Fax +375 17 506-32-37
info@twing.by
www.twing.by, www.iscar.by

Belgium
n.v. ISCAR BENELUX s.a.
Roekhout 13
B 1702 Dilbeek (Groot-Bijgaarden)
Tel +32 (0) 2 464 2020
Fax +32 (0) 2 522 5121
info@iscar.be
www.iscar.be

Bosnia
(Representative Office)
Kralja Tvrtka I br. 17
BIH- 72000 Zenica
Tel +387 32 201 100
Fax +387 32 201 101
info@iscar.ba

Brazil
ISCAR DO BRASIL COM.L. LTDA.
Rodovia Miguel Melhado Campos,
Km 79, Bairro Moinho
CEP: 13280-000 - Vinhedo - SP
Tel +55 19 3826-7100
Fax +55 19 3826-7171
DDG 0800 701 8877
iscar@iscarbrasil.com.br
www.iscar.com.br

Bulgaria
ISCAR BULGARIA
Starozagorska 1, Str.
Floor 1, Office G,
6100 Kazanlak
Tel/Fax +359 431 62557
aa_iscar@infotel.bg

Canada
ISCAR TOOLS INC.
2100 Bristol Circle
Oakville, Ontario L6H 5R3
Tel +1 905 829 9000
Fax +1 905 829 9100
admin@iscar.ca
www.iscar.ca

China
ISCAR CHINA
7B21, Hanwei Plaza,
7 Guanghua Road
Chaoyang District
Beijing 100004
Tel +86 10 6561 0261/2/3
Fax +86 10 6561 0264
iscar@iscar.com.cn
www.iscar.com.cn

Croatia
ISCAR ALATI d.o.o.
J. Jeladića 134
CRO-10430 Samobor
Tel +385 (0) 1 33 23 301
Fax +385 (0) 1 33 76 145
www@zg.t-com.hr
www.iscar.hr

Czech Republic
ISCAR CR s.r.o.
Mánesova 73, 301 00 Plzen
Tel +420 377 420 625
Fax +420 377 420 630
iscar@iscar.cz
www.iscar.cz

Finland
ISCAR FINLAND OY
Ahertajantie 6
02100 Espoo
Tel +358-(0)9-439 1420
Fax +358-(0)9-466 328
info@iscar.fi

France
ISCAR FRANCE SAS
8, Rue Georges Guynemer
78286 GUYANCOURT Cedex
Tel +33 (0)1 30 12 92 92
Fax +33 (0)1 30 43 88 22
info@iscar.fr
www.iscar.fr

Germany
ISCAR GERMANY GmbH
Eisenstockstrasse 14
D 76275 Ettlingen
Tel +49 (0) 72 43 9908-0
Fax +49 (0) 72 43 9908-93
gmbh@iscar.de
www.iscar.de

Hungary
ISCAR HUNGARY kft
Kassai u 151
H 1142 Budapest
Tel +36 1 251 5688
Fax +36 1 251 4757
iscar@iscar.hu
www.iscar.hu

Italy
ISCAR ITALIA srl
Via Mattei 49 / 51
20020 Arese [MI]
Tel +39 02 93 528 1
Fax +39 02 93 528 213
marketing@iscaritalia.it
www.iscaritalia.it

Japan
ISCAR JAPAN LTD.
Head Office
15th Floor, Senri Asahi
Hankyu Building
1-5-3, Shinsenri-Higashimachi
Toyonaka-Shi,
Osaka 560-0082
Tel +81 6 6835 5471
Fax +81 6 6835 5472
iscar@iscar.co.jp
www.iscar.co.jp

Macedonia
(Representative Office)
Londonska 19/4
MK-1000 Skopje
Tel +389 2 309 02 52
Fax +389 2 309 02 54
info@iscar.com.mk

Mexico
ISCAR DE MÉXICO,
S.A de C.V.
Fray Pedro de Gante 15
Col. Cimatarío
Querétaro, Qro.
C.P. 76030
Tel +52 (442) 214 5505
Fax +52 (442) 214 5510
iscarmex@iscar.com.mx
www.iscar.com.mx

The Netherlands
ISCAR NEDERLAND B.V.
Postbus 704, 2800 AS Gouda
Tel +31 (0) 182 535523
Fax +31 (0) 182 572777
info@iscar.nl
www.iscar.nl

New Zealand
ISCAR PACIFIC LTD.
1/501 Mt. Wellington Hwy.
Mt. Wellington Auckland
Tel +64 9 5731280
Fax +64 9 5730781
iscar@iscarpac.co.nz

Poland
ISCAR POLAND Sp. z o.o.
ul. Gospodarcza 14
40-432 Katowice
Tel +48 32 735 7700
Fax +48 32 735 7701
iscar@iscar.pl
www.iscar.pl

Portugal
ISCAR PORTUGAL, SA
Avd.Dr.Domingos Caetano de Sousa
Fracção B, N° 541
4520-165 Santa Maria da Feira
Tel +351 256 579950
Fax +351 256 586764
geral@iscarportugal.pt
www.iscarportugal.pt

Romania
ISCAR TOOLS SRL
Str. Maramures nr. 38,
Corp 2, Otopeni,
jud. Ilfov, cod 010832
Tel +40 (0)312 286 614
Fax +40 (0)312 286 615
iscar-romania@iscar.com

Russia
Moscow
ISCAR RUSSIA CIS
Godovikova str. 9, build. 10
129085 Moscow
Tel/fax +7 495 660 91 25/31
iscar@iscar.ru
www.iscar.ru

Chelyabinsk
ISCAR RF EAST LTD
Malogruzovaya str., 1 - office 605
454007, Chelyabinsk
Tel/fax +7 351 2450432
rfe@iscar.com
www.iscar.ru

Serbia
ISCAR TOOLS d.o.o.
Autoput 22
SRB-11080 Zemun
Tel +381 11 314 90 38
Fax +381 11 314 91 47
info@iscartools.co.yu

Slovakia
ISCAR SR, s.r.o.
K múzeu 3
010 03 Zilina
Tel +421 (0) 41 5074301
Fax +421 (0) 41 5074311
info@iscar.sk
www.iscar.sk

Slovenia
ISCAR SLOVENIJA d.o.o.
IOC, Motnica 14
SI-1236 Trzin
Tel +386 1 580 92 30
Fax +386 1 562 21 84
info@iscar.si
www.iscar.si

South Africa
ISCAR SOUTH AFRICA (PTY) LTD.
47 Lake Road
Longmeadow Business Estate - North
Extension 7, Modderfontein,
Edenvale, Gauteng
P.O. Box 392
Longmeadow Business Estate - North 1609
ShareCall 08600-47227
Tel +27 11 997 2700
Fax +27 11 388 9750
iscar@iscarsa.co.za
www.iscar.co.za

South Korea
ISCAR KOREA
304 Younggye-Ri,
Gachang-myeon
Dalsung-gun, Daegu 711-860
Tel +82 53 760 7590
Fax +82 53 767 7203
koss@taegutec.co.kr
www.iscarkorea.co.kr

Spain
ISCAR IBERICA SA
Parc Tecnològic del Vallès
Avda. Universitat Autònoma 19-21
08290 Cerdanyola-Barcelona
Tel +34 93 594 6484
Fax +34 93 582 4458
iscar@iscarib.es
www.iscarib.es

Sweden
ISCAR SVERIGE AB
Kungsvängsvagen 17B
Box 845
751 08 Uppsala
Tel +46 (0) 18 66 90 60
Fax +46 (0) 18 122 920
info@iscar.se
www.iscar.se

Switzerland
ISCAR HARTMETALL AG
Wespenstrasse 14
CH 8500 Frauenfeld
Tel +41 (0) 52 728 0850
Fax +41 (0) 52 728 0855
office@iscar.ch
www.iscar.ch

Taiwan
ISCAR TAIWAN LTD.
395, Da Duen South Road,
Taichung 408
Tel +886 (0)4-24731573
Fax +886 (0)4-24731530
iscar.taiwan@msa.hinet.net
www.iscar.org.tw

Thailand
ISCAR THAILAND LTD.
57, 59, 61, 63 Soi Samanchan-Babos
Sukhumvit Rd.
Phra Khanong, Khlong Toey
Bangkok 10110
Tel +66 (2) 7136633-8
Fax +66 (2) 7136632
iscar@iscarthailand.com

Turkey
ISCAR KESICI TAKIM
TIC. VE IML. LTD. STI.
Gebze Organize Sanayi Bölgesi (GOSB)
Ihsan Dede Cad. No: 105
Gebze / Kocaeli
Tel +90 (262) 751 04 84 (Pbx)
Fax +90 (262) 751 04 85
iscar@iscar.com.tr
www.iscar.com.tr

Ukraine
ISCAR UKRAINE LLC
Volgodonska str., 66
02099 Kiev
Tel/fax +38 (044) 503-07-08
iscar_ua@iscar.com
www.iscar.ru

United Kingdom
ISCAR TOOLS LTD.
Woodgate Business Park
Bartley Green
Birmingham B32 3DE
Tel +44 (0) 121 422 8585
Fax +44 (0) 121 423 2789
sales@iscar.co.uk
www.iscar.co.uk

United States
ISCAR METALS INC.
300 Westway Place
Arlington, TX 76018-1021
Tel +1 817 258 3200
Tech Tel 1-877-BY-ISCAR
Fax +1 817 258 3221
info@iscarmetals.com
www.iscarmetals.com

Vietnam
ISCAR VIETNAM
(Representative Office)
Room D 2.3, Etown Building,
364 Cong Hoa, Tan Binh Dist.,
Ho Chi Minh City
Tel +84 38 123 519/20
Fax +84 38 123 521
iscarvn@hcm.fpt.vn

06/2013



7861759 G

"As part of Iscar's ongoing effort to improve its products,
it reserves the right to make changes to any of the products
appearing in this publication, without prior notice."

Main Photography - ISCAR Ltd. Additional Photography - Warhaftig Venezian

FACE GROOVE-TURN TOOLS

Metric Version 2013

